

Math mode - v.2.32

Herbert Voß*

February 29, 2008

Abstract

It is often said that \TeX was designed for mathematical or technical purposes. This may be true when we remember the reasons why Donald Knuth created \TeX . But nowadays there are many examples in which \TeX is used for publications with no mathematical or technical background content. However, writing publications with such material is one of the important advantages of \TeX . Because it seems impossible to know all existing macros and options of (LA) \TeX and the several additional packages, especially of \AMS math. This is the reason why I have attempted to gather all the relevant facts in this paper. An advanced german version of this paper is available as a book [25].

Please report typos or any other comments to this documentation to
vooss@perce.de.

This file can be redistributed and/or modified under the terms of the \LaTeX Project Public License Distributed from CTAN archives in directory [CTAN://macros/latex/base/lppl.txt](http://macros/latex/base/lppl.txt).

*Thanks for the feedback to: Hendri Adriaens; Juan Mari Alberdi; Heiko Bauke; Neal Becker; Andrea Blomenhofer; Alexander Boronka; Walter Brown; Christian Faulhammer; José Luis Gómez Dans; Zongbao Fang; Sabine Glaser; Sven Gleich; Azzam Hassam; Gernot Hassenpflug; Henning Heinze; Martin Hensel; Mathias Hoffmann; Jon Kirwan; Morten Høgholm; M. Kalidoss; Dan Lasley; Angus Leeming; Vladimir Lomov; Tim Love; Dan Luecking; Hendrik Maryns; Heinz Mezera; David Neuway; Luis Trucco Passadore; Joachim Punter; Carl Riehm; Will Robertson; Christoph Rumsmüller; José Carlos Santos; Arnaud Schmittbuhl; Rainer Schöpf; Jens Schwaiger; Uwe Siart; Martin Sievers; Heiko Stamer; Uwe Stöhr; Carsten Thiel; Juan Luis Varona; David Weenink; Philipp Wook; Michael Zedler; Zou Yuan-Chuan; and last but not least a special thanks to Monika Hattenbach for her excellent job of proofreading.

Contents

	Page
I Standard L^AT_EX math mode	10
1 Introduction	10
2 The Inlinemode	10
2.1 Limits	11
2.2 Fraction command	11
2.3 Math in Chapter/Section Titles	11
2.4 Equation numbering	12
2.5 Framed math	12
2.6 Linebreak	13
2.7 Whitespace	13
2.8 <i>AMSmath</i> for the inline mode	13
3 Displaymath mode	14
3.1 <i>equation</i> environment	14
3.2 <i>eqnarray</i> environment	15
3.2.1 Short commands	16
3.3 Equation numbering	16
3.3.1 Changing the style	17
3.3.2 Resetting a counter style	17
3.3.3 Equation numbers on the left side	17
3.3.4 Changing the equation number style	17
3.3.5 More than one equation counter	17
3.4 Labels	18
3.5 Frames	19
4 array environment	20
4.1 Cases structure	21
4.2 <i>arraycolsep</i>	22
5 Matrix	23
6 Super/Subscript and limits	25
6.1 Multiple limits	25
6.2 Problems	25
7 Roots	26

8 Brackets, braces	27
8.1 Examples	28
8.1.1 Braces over several lines	28
8.1.2 Middle bar	30
8.2 New delimiters	30
8.3 Problems with parentheses	30
9 Text in math mode	31
10 Font commands	31
10.1 Old-style font commands	31
10.2 New-style font commands	32
11 Space	32
11.1 Math typesetting	32
11.2 Additional horizontal spacing	33
11.3 Problems	34
11.4 Dot versus comma	35
11.5 Vertical whitespace	36
11.5.1 Before/after math expressions	36
11.5.2 Inside math expressions	36
12 Styles	38
13 Dots	39
14 Accents	40
14.1 Over- and underbrackets	40
14.1.1 Use of \underbrace{...}	41
14.1.2 Overbrace	41
14.2 Vectors	42
15 Exponents and indices	42
16 Operators	43
17 Greek letters	44
18 Pagebreaks	45
19 \stackrel	46
20 \choose	46
21 Color in math expressions	47

22 Boldmath	47
22.1 Bold math titles and items	48
23 Multiplying numbers	49
24 Other macros	49
II <i>AMSmath</i> package	50
25 align environments	51
25.1 The default <code>align</code> environment	52
25.2 <code>alignat</code> environment	53
25.3 <code>flalign</code> environment	54
25.4 <code>xalignat</code> environment	55
25.5 <code>xxalignat</code> environment	56
25.6 <code>aligned</code> environment	56
25.7 Problems	56
26 Other environments	57
26.1 <code>gather</code> environment	57
26.2 <code>gathered</code> environment	57
26.3 <code>multiline</code> environment	59
26.3.1 Examples for <code>multiline</code>	61
26.4 <code>split</code> environment	62
26.5 <code>cases</code> environment	64
26.6 Matrix environments	65
27 Vertical whitespace	66
28 Dots	66
29 fraction commands	67
29.1 Standard	67
29.2 Binoms	68
30 Roots	69
30.1 Roots with <code>\smash</code> command	69
31 Accents	69
32 \mod command	70
33 Equation numbering	70
33.1 Subequations	71

34 Labels and tags	72
35 Limits	72
35.1 Multiple limits	73
35.2 Problems	73
35.3 \sideset	74
36 Operator names	75
37 Text in math mode	76
37.1 \text command	76
37.2 \intertext command	77
38 Extensible arrows	78
39 Frames	79
40 Greek letters	80
41 Miscellaneous commands	80
42 Problems with amsmath	81
III T_EX and math	83
43 Length registers	83
43.1 \abovedisplayshortskip	83
43.2 \abovedisplayskip	83
43.3 \belowdisplayshortskip	83
43.4 \belowdisplayskip	83
43.5 \delimiterfactor	83
43.6 \delimitershortfall	84
43.7 \displayindent	84
43.8 \displaywidth	85
43.9 \mathsurround	85
43.10\medmuskip	85
43.11\mkern	85
43.12\mskip	85
43.13\muskip	86
43.14\muskipdef	86
43.15\nonscript	86
43.16\nulldelimiterspace	86
43.17\predisplaysize	86
43.18\scriptspace	86

43.19\thickmuskip	86
43.20\thinmuskip	86
43.21\medmuskip	87
44 Math font macros	87
44.1 \delcode	87
44.2 \delimiter	87
44.3 \displaystyle	87
44.4 \fam	88
44.5 \mathaccent	88
44.6 \mathbin	88
44.7 \mathchar	88
44.8 \mathchardef	89
44.9 \mathchoice	89
44.10\mathclose	89
44.11\mathcode	89
44.12\mathop	90
44.13\mathopen	90
44.14\mathord	90
44.15\mathpunct	90
44.16\mathrel	90
44.17\scriptfont	90
44.18\scriptscriptfont	90
44.19\scriptscriptstyle	91
44.20\scriptstyle	91
44.21\skew	91
44.22\skewchar	91
44.23\textfont	91
44.24\textstyle	91
45 Math macros	91
45.1 \above	91
45.2 \abovewithdelims	92
45.3 \atop	92
45.4 \atopwithdelims	92
45.5 \displaylimits	92
45.6 \eqno	93
45.7 \everydisplay	93
45.8 \everymath	93
45.9 \left	93
45.10\leqno	93
45.11\limits	94
45.12\mathinner	94
45.13\nolimits	94

CONTENTS

CONTENTS

45.14\over	94
45.15\overline	94
45.16\overwithdelims	94
45.17\radical	94
45.18\right	95
45.19\underline	95
45.20\vcenter	95
46 Math penalties	95
46.1 \binoppenalty	95
46.2 \displaywidowpenalty	95
46.3 \postdisplaypenalty	96
46.4 \predisplaypenalty	96
46.5 \relpenalty	96
IV Other packages	97
47 List of available math packages	97
47.1 accents	97
47.2 amscd – commutative diagrams	98
47.3 amsopn	98
47.4 bigdel	98
47.5 bm	100
47.6 braket	100
47.7 cancel	101
47.8 cool	102
47.9 delarray	104
47.10dotseqn	104
47.11empheq	105
47.12esint	106
47.13eucal and euscript	107
47.14exscale	107
47.15mathtools	108
47.16nicefrac	109
47.17relsize	109
47.18xypic	109
V Math fonts	111
48 Computer modern	111
49 Latin modern	111

50 Palatino	112
51 Palatino – microimp	112
52 cmbright	113
53 minion	113
VI Special symbols	114
54 Integral symbols	114
55 Harpoons	115
56 Bijective mapping arrow	116
57 Stacked equal sign	116
58 Other symbols	117
VII Examples	118
59 Tuning math typesetting	118
60 Matrix	119
60.1 Identity matrix	119
60.2 System of linear equations	119
60.3 Matrix with comments on top	120
61 Cases structure	120
61.1 Cases with numbered lines	120
62 Arrays	121
62.1 Quadratic equation	122
62.2 Vectors and matrices	123
62.3 Cases with (eqn)array environment	123
62.4 Arrays inside arrays	124
62.5 Colored cells	125
62.6 Boxed rows and columns	126
63 Over- and underbraces	127
63.1 Braces and roots	127
63.2 Overlapping braces	127
63.3 Vertical alignment	128

CONTENTS

CONTENTS

63.4 Alignment	129
64 Integrals	130
65 Horizontal alignment	130
65.1 Over more than one page	130
65.2 Special text columns	132
65.3 Centered vertical dots	134
66 Node connections	134
67 Special Placement	136
67.1 Formulas side by side	136
67.2 Itemize environment	138
68 Roots	139
VIII Lists, bibliography and index	141
List of Figures	142
List of Tables	143
Bibliography	144
Index	146
A Filelist	155

Part I

Standard L^AT_EX math mode

1 Introduction

The following sections describe all the math commands which are available without any additional package. Most of them also work with special packages and some of them are redefined. At first some important facts for typesetting math expressions.

2 The Inlinemode

As the name says there are always math expressions which are in a standard textline, like this one: $f(x) = \int_a^b \frac{\sin x}{x} dx$. There are no limitations for the height of the math expressions, so that the layout may be very lousy if you

insert a big matrix in an inline mode like this: $\underline{A} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix}$. In this case it is better to use the `\smallmatrix` environment $\underline{A} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix}$ from the *$\mathcal{M}\mathcal{S}$ math* package (see section 26.6 on page 65) or the `displaymath` mode (section 3 on page 14).

This inline mode is possible with three different commands:

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n + 1)$$

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n + 1)$$

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n + 1)$$

```

1  \(\sum_{i=1}^n i=\frac{1}{2}n\cdot(n+1)\)
2  \$\sum_{i=1}^n i=\frac{1}{2}n\cdot(n+1)
3  $\begin{aligned}
4  \sum_{i=1}^n i&=\frac{1}{2}n\cdot(n+1)\\
5  \end{aligned}
```

1. `\(... \)`, the problem is that `\(` is not a robust macro (see section 2.3 on the following page).

2. `$... $` `$...$`

3. `\begin{math} ... \end{math}`, also not robust `\begin{math} ... \end{math}`

In general `$...$` is the best choice, but this does not work in environments like `verbatim` or `alltt`. In this case `\(...\)` works.

2.1 Limits

In the inline mode the limits are by default only in super or subscript mode and the fractions are always in the scriptstyle¹ font size. For example:

$\int_1^\infty \frac{1}{x^2} dx = 1$, which is not too big for the textline. You can change this with the command `\limits`, which must follow a math operator² like an integral (`\int`), a sum (`\sum`), a product (`\prod`) or a limes (`\lim`). But this

$\int_1^\infty \frac{1}{x^2} dx = 1 (\$ \int \limits_{1}^{\infty} \frac{1}{x^2} dx = 1)$ does not look very nice in a text line when

it appears between two lines, especially when there are multiline limits.³

```
\limits
\int
\lim
\prod
\sum
```

2.2 Fraction command

For inlined formulas the fractions are by default in the scriptstyle (see tabular 8 on page 38), which is good for typesetting $y = \frac{a}{b+1}$, because the linespacing is nearly the same, but not optimal, when the formula shows some important facts. There are two solutions to get a better reading:

1. choose the display mode instead of the inline mode, which is the better one;
2. set the fontstyle to `\displaystyle`, which makes the fraction $y = \frac{a}{b+1}$ more readable but the linespacing increases which is always a bad solution and should only be used when the first solution makes no sense.⁴

$$y = \frac{a}{b+1} = \frac{a}{b+1} \quad 1 \quad \$ y = \frac{a}{b+1} = \displaystyle \frac{a}{b+1} \$$$

2.3 Math in `\part`, `\chapter`, `\section`, ... titles like $f(x) = \prod_{i=1}^n (i - \frac{1}{2i})$

All commands which appear in positions like contents, index, header, ... must be robust⁵ which is the case for `$...$` but not for `\(...\)`. The latest package `fixltx2e` defines an macro for declaring existing commands to be robust. The package itself does this already for:

```
1 \MakeRobust \
2 \MakeRobust \
3 \MakeRobust \[
```

¹See section 12 on page 38.

²To define a new operator see page 75

³For more information about limits see section 6.1 on page 25 or section 35 on page 72.

⁴For an abbreviation see section 29 on page 67, there is a special `\dfrac` macro.

⁵`robust` means that the macro is not expanded before it is moved into for example the tableofcontents file (`*.toc`). No robustness is often a problem, when a macro is part of another macro.

```

4 \MakeRobust []
5 \MakeRobust\makebox
6 \MakeRobust\savebox
7 \MakeRobust\framebox
8 \MakeRobust\parbox
9 \MakeRobust\rule
10 \MakeRobust\raisebox

```

If you do not have any contents, index, a.s.o. you can write the math-stuff in `\chapter`, `\section`, a.s.o without any restriction. Otherwise use `\protect\(`` and `\protect\)`` or the `$...$` version.

The whole math expression appears in the default font shape and not in bold like the other text. Section [22.1 on page 48](#) describes how the math expressions can be printed also in bold.

There are problems with the `hyperref` package when there is no text part in a title. It is possible with the command `\texorpdfstring` to tell `hyperref` to use different commands, one for the title and another one for the bookmarks:

```
\texorpdfstring{<TeX part>}{<hyperref part>}
```

```

1 \texorpdfstring{$\int f(x) dx$}{Integral function}

```

2.4 Equation numbering

It is obvious that the numbering of inline mathstuff makes no sense!

2.5 Framed math

With the `\fbox` macro everything of inline math can be framed, like the following one:

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right)$$

```

1 \fbox{$f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)$}

```

Parameters are the width of `\fboxsep` and `\fboxrule`, the predefined values from the file `latex.ltx` are:

```

1 \fboxsep = 3pt
2 \fboxrule = .4pt

```

The same is possible with the `\colorbox` $f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right)$ from the `color` package.

```

1 \colorbox{yellow}{$f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)$}

```

2.6 Linebreak

\LaTeX can break an inline formula only when a relation symbol ($=, <, >, \dots$) or a binary operation symbol ($+, -, \dots$) exists and at least one of these symbols appears at the outer level of a formula. Thus $\$a+b+c\$$ can be broken across lines, but $\$\{a+b+c\}\$$ not.

- The default: $f(x) = a_n x^n + a_{n-1} x^{n-1} + a_{n-2} x^{n-2} + \dots + a_i x^i + a_2 x^2 + a_1 x^1 + a_0$
- The same inside a group $\{\dots\}$: $f(x) = a_n x^n + a_{n-1} x^{n-1} + a_{n-2} x^{n-2} + \dots + a_i x^i + a_2 x^2 + a_1 x^1 + \dots$
- Without any symbol: $f(x) = a_n (a_{n-1} (a_{n-2} (\dots) \dots) \dots)$

If it is not possible to have any mathsymbol, then split the inline formula in two or more pieces ($\$ \dots \$ \$ \dots \$$). If you do not want a linebreak for the whole document, you can set in the preamble:

```
\relpenalty=9999
\binoppenalty=9999
```

which is the extreme case of grudgingly allowing breaks in extreme cases, or

```
\relpenalty=10000
\binoppenalty=10000
```

for absolutely no breaks.

2.7 Whitespace

\LaTeX defines the length $\mathsf{\mathit{mathsurround}}$ with the default value of $0pt$. This length is added before and after an inlined math expression (see table 1).

foo $f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$ bar	<pre> 1 foo \fbox{\$ f(x)=\int_1^\infty \frac{1}{x^2} dx = 1 \$} bar </pre>
foo $f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$ bar	<pre> 1 foo \rule{20pt}{\ht\strutbox}\fbox{\$ f(x) = \int_1^\infty \frac{1}{x^2} dx = 1 \$}\rule{20pt}{\ht\strutbox} bar </pre>
foo $f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$ bar	<pre> 1 \setlength{\mathsurround}{20pt} 2 foo \fbox{\$ f(x)=\int_1^\infty \frac{1}{x^2} dx = 1 \$} bar </pre>

Table 1: Meaning of $\mathsf{\mathit{mathsurround}}$

2.8 \mathcal{AM} s math for the inline mode

None of the \mathcal{AM} s math-functions are available in inline mode.

3 Displaymath mode

This means, that every formula gets its own paragraph (line). There are some differences in the layout to the one from the title of 2.3.

3.1 equation environment

For example:

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right) \quad (1)$$

```

1 \begin{equation}
2   f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)
3 \end{equation}
```

The delimiters `\begin{equation}` ... `\end{equation}` are the only difference to the inline version. There are some equivalent commands for the display-math mode:

- 1. `\begin{displaymath} ... \end{displaymath}`, same as `\[... \]`
- 2. `\[... \]`. (see above) the short form of a displayed formula, no number

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right)$$

displayed, no number. Same as 1.

- 3. `\begin{equation} ... \end{equation}`
- $$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right) \quad (2)$$

displayed, a sequential equation number, which may be reset when starting a new chapter or section.

- (a) There is only **one** equation number for the whole environment.
- (b) There exists no star-version of the equation environment because `\[... \]` is the equivalent. With the tag `\nonumber` it is possible to suppress the equation number:

$$f(x) = [...]$$

```

1 \begin{equation}
2   f(x)= [...] \nonumber
3 \end{equation}
```

3.2 *eqnarray* environment

This is by default an array with three columns and as many rows as you like.

It is nearly the same as an array with a `rcl` column definition.

It is **not possible** to change the internal behaviour of the `eqnarray` environment without rewriting the environment. It is always an implicit array with **three** columns and the horizontal alignment `right-center-left` (`rcl`) and small **symbol** sizes for the middle column. All this can not be changed by the user without rewriting the whole environment in `latex.ltx`.

$$\begin{array}{ccc} \text{left} & \text{middle} & \text{right} \\ \frac{1}{\sqrt{n}} & = & \frac{\sqrt{n}}{n} = \frac{n}{n\sqrt{n}} \end{array}$$

```

1 \begin{eqnarray*}
2 \mathit{mathrm{left}} & \& \mathit{mathrm{middle}} & \&
3 \mathit{mathrm{right}} \\
4 \frac{1}{\sqrt{n}} = & \& \frac{\sqrt{n}}{n} = & \& \frac{n}{n\sqrt{n}}
5 \end{eqnarray*}
```

```
\begin{eqnarray}
...
\end{eqnarray}
```

The `eqnarray` environment should not be used as an array. As seen in the above example the typesetting is wrong for the middle column. The numbering of `eqnarray` environments is always for every row, means, that four lines get four different equation numbers (for the labels see section 3.4 on page 18):

$$\begin{aligned} y &= d & (3) \\ y &= cx + d & (4) \\ y &= bx^2 + cx + d & (5) \\ y &= ax^3 + bx^2 + cx + d & (6) \end{aligned}$$

```

1 \begin{eqnarray}
2 y &= & d \label{eq:2} \\
3 y &= & cx+d \\
4 y &= & bx^{2}+cx+d \\
5 y &= & ax^{3}+bx^{2}+cx+d \\
6 \end{eqnarray}
```

Toggling numbering off/on for **all** rows is possible with the starred version of `eqnarray`.

$$\begin{aligned} y &= d \\ y &= cx + d \\ y &= bx^2 + cx + d \\ y &= ax^3 + bx^2 + cx + d \end{aligned}$$

```

1 \begin{eqnarray*}
2 y &= & d \label{eq:3} \\
3 y &= & cx+d \\
4 y &= & bx^{2}+cx+d \\
5 y &= & ax^{3}+bx^{2}+cx+d \\
6 \end{eqnarray*}
```

Toggling off/on for **single** rows is possible with the above mentioned `\nonumber` tag at the end of a row (before the newline command). For example:

```

1 \begin{eqnarray}
2   y & = & d \\ 
3   y & = & cx + d \\
4   y & = & bx^2 + cx + d \\
5   y & = & ax^3 + bx^2 + cx + d \quad (7) \\
6 \end{eqnarray}

```

3.2.1 Short commands

It is possible to define short commands for the `eqnarray` environment

```

1 \makeatletter
2 \newcommand{\be}{%
3   \begingroup
4 % \setlength{\arraycolsep}{2pt}
5   \eqnarray%
6   \@ifstar{\nonumber}{}%
7 }
8 \newcommand{\ee}{\endeqnarray\endgroup}
9 \makeatother

```

Now you can write the whole equation as

$$f(x) = \int \frac{\sin x}{x} dx \quad (8)$$

```

1 \be
2   f(x) &=& \int \frac{\sin x}{x}, \mathbf{d} x
3 \ee

```

or, if you do not want to have a numbered equation as

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \be*
2   f(x) &=& \int \frac{\sin x}{x}, \mathbf{d} x
3 \ee

```

3.3 Equation numbering

For all equations which can have one or more equation numbers (for every `\nonumber` line/row) the numbering for the whole equation can be disabled with switching from the unstarred to the star version. This is still for the whole formula and doesn't work for single rows. In this case use the `\nonumber` tag.

- This doc is written with the article-class, which counts the equations continuously over all parts/sections. You can change this behaviour in different ways (see the following subsections).
- In standard L^AT_EX it is a problem with too long equations and the equation number, which may be printed with the equation one upon the other. In this case use the *AMSmash* package, where the number is set above or below of a too long equation (see equation 28 on page 28).
- For counting subequations see section 33.1 on page 71.

3.3.1 Changing the style

With the beginning of Section 25.2 on page 53 the counting changes from “44” into the new style “II-51”. The command sequence is

```
1 \renewcommand\theequation{\thepart-\arabic{equation}}
```

See section 33 on page 70 for the $\mathcal{A}\mathcal{M}\mathcal{S}$ math command.

3.3.2 Resetting a counter style

Removing a given reset is possible with the `remreset`.⁶ Write into the preamble

```
1 \makeatletter
2 \removefromreset{equation}{section}
3 \makeatother
```

or anywhere in the text.

Now the equation counter is no longer reset when a new section starts. You can see this after section 26.4 on page 62.

3.3.3 Equation numbers on the left side

Choose package `leqno`⁷ or have a look at your document class, if such an option exists.

3.3.4 Changing the equation number style

The number style can be changed with a redefinition of

```
\def\@eqnnum{{\normalfont \normalcolor (\theequation)}}
```

For example: if you want the numbers not in parentheses write

```
1 \makeatletter
2 \def\@eqnnum{{\normalfont \normalcolor \theequation}}
3 \makeatother
```

For $\mathcal{A}\mathcal{M}\mathcal{S}$ math there is another macro, see section 33 on page 70.

3.3.5 More than one equation counter

You can have more than the default equation counter. With the following code you can easily toggle between roman and arabic equation counting.

⁶CTAN://macros/latex/contrib/supported/carlisle/remreset.sty

⁷CTAN://macros/latex/unpacked/leqno.sty

```

1 %code by Heiko Oberdiek
2 \makeatletter
3 %Roman counter
4 \newcounter{roem}
5 \renewcommand{\theroem}{\text{roman}{roem}}
6
7 % save the original counter
8 \newcommand{\c@org@eq}{}%
9 \let\c@org@eq\c@equation
10 \newcommand{\org@theeq}{}%
11 \let\org@theeq\theequation
12
13 %\setroem sets roman counting
14 \newcommand{\setroem}{%
15   \let\c@equation\c@roem
16   \let\theequation\theroem
17 }
18 %\setarab the arabic counting
19 \newcommand{\setarab}{%
20   \let\c@equation\c@org@eq
21   \let\theequation\org@theeq
22 \makeatother

```

The following examples show how it works:

$$f(x) = \int \sin x \, dx \quad (9)$$

$$g(x) = \int \frac{1}{x} \, dx \quad (10)$$

$$F(x) = -\cos x \quad (\text{i})$$

$$G(x) = \ln x \quad (\text{ii})$$

$$f'(x) = \sin x \quad (11)$$

$$g'(x) = \frac{1}{x} \quad (12)$$

```

1 \begin{aligned}
2 f(x) &= \int \sin x \, , \mathbf{label}{eq:arab1} \\
3 g(x) &= \int \frac{1}{x} \, , \mathbf{label}{eq:arab2} \\
4 \end{aligned}
5 %
6 \setroem
7 %
8 \begin{aligned}
9 F(x) &= -\cos x \\
10 G(x) &= \ln x \mathbf{label}{eq:rom1} \\
11 \end{aligned}
12 %
13 \setarab
14 %
15 \begin{aligned}
16 f'(\prime)(x) &= \sin x \\
17 g'(\prime)(x) &= \frac{1}{x} \mathbf{label}{eq:arab2} \\
18 \end{aligned}

```

There can be references to these equations in the usual way, like eq.9, 12 and for the roman one eq.ii.

3.4 Labels

Every numbered equation can have a label to which a reference is possible.

- There is one restriction for the label names, they cannot include one of L^AT_EX's command characters.⁸
- The label names are replaced by the equation number.

If you do not want a reference to the equation number but to a self defined name then use the *AMSmath* command `\tag{...}`, which is described in section 34 on page 72.

`\tag`

3.5 Frames

Similar to the inline mode, displayed equations can also be framed with the `\fbox` command, like equation 13. The only difference is the fact, that the equation must be packed into a `parbox` or `minipage`. It is nearly the same for a colored box, where the `\fbox{...}` has to be replaced with `\colorbox{yellow}{...}`. The package `color.sty` must be loaded and –important – the `calc` package to get a correct boxwidth.

$$f(x) = \int_1^{\infty} \frac{1}{x^2} dx = 1 \quad (13)$$

```

1 \noindent\fbox{\parbox{\linewidth-2\fboxsep-2\fboxrule}{%
2 \begin{equation}\label{eq:frame0}
3 f(x)=\int_1^{\infty}\dfrac{1}{x^2},\mathbf{d}x=1
4 \end{equation}}
5 }

```

If the equation number should not be part of the frame, then it is a bit complicated. There is one tricky solution, which puts an unnumbered equation just beside an empty numbered equation. The `\hfill` is only useful for placing the equation number right aligned, which is not the default. The following four equations 14–17 are the same, only the second one written with the `\myMathBox` macro which has the border and background color as optional arguments with the defaults `white` for background and `black` for the frame. If there is only one optional argument, then it is still the one for the frame color (15).

```

1 \makeatletter
2 \def\myMathBox{\@ifnextchar[\{\my@MBoxi]{\my@MBoxi[black]}}
3 \def\my@MBoxi[#1]{\@ifnextchar[\{\my@MBoxii[#1]\}{\my@MBoxii
4 [#1][white]}}
5 \def\my@MBoxii[#1][#2]{\par\noindent%
6 \fcolorbox{#1}{#2}{%
7 \parbox{\linewidth-\labelwidth-2\fboxrule-2\fboxsep}{#3}}%
8 }%

```

⁸\$ _ ^ \& % { }

```

9  \parbox{\labelwidth}{%
10   \begin{eqnarray}\label{#4}\end{eqnarray}%
11 }%
12 \par%
13 }%
14 \makeatother

```

$$f(x) = x^2 + x \quad (14)$$

$$f(x) = x^2 + x \quad (15)$$

$$f(x) = x^2 + x \quad (16)$$

$$f(x) = x^2 + x \quad (17)$$

```

1 \begin{equation}\label{eq:frame2}
2   f(x)=x^2+x
3 \end{equation}
4 \myMathBox[red]{\left[f(x)=x^2+x\right]}{eq:frame3}
5 \myMathBox[red]{\left[f(x)=x^2+x\right]}{eq:frame4}
6 \myMathBox{\left[f(x)=x^2+x\right]}{eq:frame5}

```

If you are using the \mathcal{AM} Smath package, then try the solutions from section [39 on page 79](#).

4 array environment

This is simply the same as the `eqnarray` environment only with the possibility of variable rows **and** columns and the fact, that the whole formula has only **one** equation number and that the `array` environment can only be part of another math environment, like the `equation` environment or the `displaymath` environment. With `@{}` before the first and after the last column the additional space `\arraycolsep` is not used, which maybe important when using left aligned equations.

$$\left. \begin{array}{lll} \text{a)} & y = & c \quad (\text{constant}) \\ \text{b)} & y = & cx + d \quad (\text{linear}) \\ \text{c)} & y = & bx^2 + cx + d \quad (\text{square}) \\ \text{d)} & y = & ax^3 + bx^2 + cx + d \quad (\text{cubic}) \end{array} \right\} \text{Polynomes} \quad (18)$$

```
\begin{array}{...}
\end{array}
```

```

1 \begin{equation}
2 \left. \begin{array}{lll} \text{a)} & y = & c \quad (\text{constant}) \\ \text{b)} & y = & cx + d \quad (\text{linear}) \\ \text{c)} & y = & bx^2 + cx + d \quad (\text{square}) \\ \text{d)} & y = & ax^3 + bx^2 + cx + d \quad (\text{cubic}) \end{array} \right\} \text{Polynomes} \quad (18)
4

```

```

5 \text{b}) & y & = & cx+d & (linear)\\
6 \text{c}) & y & = & bx^{2}+cx+d & (square)\\
7 \text{d}) & y & = & ax^{3}+bx^{2}+cx+d & (cubic)
8 \end{array}%
9 \right\} \text{Polynomes}
10 \end{equation}
```

The horizontal alignment of the columns is the same as the one from the `tabular` environment.

For arrays with delimiters see section [47.9 on page 104](#).

4.1 Cases structure

If you do not want to use the `AMSmath` package then write your own cases structure with the `array` environment:

```

1 \begin{equation}
2 x=\left\{ \begin{array}{l}
3 0 & \text{if } A=\ldots \\
4 1 & \text{if } B=\ldots \\
5 x & \text{this runs with as much text as you like, but without an} \\
& \quad \text{raggeright text.}\end{array}\right.\end{equation}
6 \end{equation}
```

$$x = \begin{cases} 0 & \text{if } A = \dots \\ 1 & \text{if } B = \dots \\ x & \text{this runs with as much text as you like, but without an raggeright text.} \end{cases} \quad (19)$$

It is obvious, that we need a `\parbox` if the text is longer than the possible linewidth.

```

1 \begin{equation}
2 x = \left\{ \begin{array}{l}
3   \begin{array}{l} \raggedright p{.5\textwidth} \end{array} \\
4   0 & \text{if } \$A=\ldots \\
5   1 & \text{if } \$B=\ldots \\
6   x & \text{\parbox{0.5\columnwidth}{this runs with as much text as you like} } \\
7   , \\
8   \text{because an automatic linebreak is given with \%} \\
9   \text{a raggedright text. Without this \%} \\
10  \text{\raggedright command, you'll get a formatted \%} \\
11  \text{text like the following one ... but with a parbox ... it works} \\
12  \end{array} \right. \\
13 \right. \% \\
14 \end{equation}

```

$$x = \left\{ \begin{array}{l} 0 \quad \text{if } A = \dots \\ 1 \quad \text{if } B = \dots \\ x \quad \text{this runs with as much text as you} \\ \quad \text{like, because an automatic linebreak is} \\ \quad \text{given with a raggedright text.} \\ \quad \text{Without this command, you'll get a} \\ \quad \text{formatted text like the following one} \\ \quad \dots \text{ but with a parbox ... it works} \end{array} \right. \quad (20)$$

4.2 arraycolsep

All the foregoing math environments use the array to typeset the math expression. The predefined separation between two columns is the length `\arraycolsep`, which is set by nearly all document classes to `5pt`, which seems to be too big. The following equation is typeset with the default value and the second one with `\arraycolsep=1.4pt`

$$\boxed{f(x)} = \boxed{\int \frac{\sin x}{x} dx}$$

$$\boxed{f(x)} = \boxed{\int \frac{\sin x}{x} dx}$$

If this modification should be valid for all arrays/equations, then write it into the preamble, otherwise put it into a group or define your own environment as done in section [3.2.1 on page 16](#).

```

1 \bgroup
2 \arraycolsep=1.4pt
3 \begin{eqnarray}
4 f(x) & = & \int \frac{\sin x}{x} dx \\
5 \end{eqnarray}
6 \egroup

```

```

1 \makeatletter
2 \newcommand{\be}{%
3   \begingroup
4   \setlength{\arraycolsep}{1.4pt}
5 [ ... ]

```

5 Matrix

TEX knows two macros and L^AT_EX one more for typesetting a matrix:

$$\begin{matrix} A & B & C \\ d & e & f \\ 1 & 2 & 3 \end{matrix}$$

```

1 $\begin{matrix}
2   A & B & C \\
3   d & e & f \\
4   1 & 2 & 3 \\
5 \end{matrix}$
```

$$\begin{matrix} 0 & 1 & 2 \\ 0 \left(\begin{matrix} A & B & C \\ d & e & f \\ 1 & 2 & 3 \end{matrix} \right) \end{matrix}$$

```

1 $\bordermatrix{%
2   & 0 & 1 & 2 \cr
3   0 & A & B & C \cr
4   1 & d & e & f \cr
5   2 & 1 & 2 & 3 \cr
6 }$
```

The first two macros are listed here for some historical reason, because the `array` environment or especially the *AMSmash* package offers the same or better macros/environments. Nevertheless it is possible to redefine the `\bordermatrix` macro to get other parentheses and a star version which takes the left top part as matrix:

$$\begin{matrix} 1 & 2 \\ 1 \left(\begin{matrix} x_1 & x_2 \\ x_3 & x_4 \\ x_5 & x_6 \end{matrix} \right) \end{matrix}$$

```

1 $\bordermatrix{%
2   & 1 & 2 \cr
3   1 & x_1 & x_2 \cr
4   2 & x_3 & x_4 \cr
5   3 & x_5 & x_6 \\
6 }$
```

$$\begin{matrix} 1 & 2 \\ 1 \left[\begin{matrix} x_1 & x_2 \\ x_3 & x_4 \\ x_5 & x_6 \end{matrix} \right] \end{matrix}$$

```

1 $\bordermatrix{[\,\,\,]}{%
2   & 1 & 2 \cr
3   1 & x_1 & x_2 \cr
4   2 & x_3 & x_4 \cr
5   3 & x_5 & x_6 \\
6 }$
```

$$\begin{matrix} 1 & 2 \\ 1 \left\{ \begin{matrix} x_1 & x_2 \\ x_3 & x_4 \\ x_5 & x_6 \end{matrix} \right\} \end{matrix}$$

```

1 $\bordermatrix{[\,\,\,]}{%
2   & 1 & 2 \cr
3   1 & x_1 & x_2 \cr
4   2 & x_3 & x_4 \cr
5   3 & x_5 & x_6 \\
6 }$
```

$$\begin{pmatrix} x_1 & x_2 \\ x_3 & x_4 \\ x_5 & x_6 \end{pmatrix} \begin{matrix} 1 \\ 2 \\ 3 \\ 1 & 2 \end{matrix}$$

```
1 \$\bordermatrix*{%
2   x1 & x2 & 1 \cr
3   x3 & x4 & 2 \cr
4   x5 & x6 & 3 \cr
5   1 & 2
6 }$
```

$$\begin{bmatrix} x_1 & x_2 \\ x_3 & x_4 \\ x_5 & x_6 \end{bmatrix} \begin{matrix} 1 \\ 2 \\ 3 \\ 1 & 2 \end{matrix}$$

```
1 \$\bordermatrix*[{[]}]{%
2   x1 & x2 & 1 \cr
3   x3 & x4 & 2 \cr
4   x5 & x6 & 3 \cr
5   1 & 2
6 }$
```

$$\left\{ \begin{array}{l} x_1 \\ x_3 \\ x_5 \end{array} \right. \begin{array}{l} x_2 \\ x_4 \\ x_6 \end{array} \begin{matrix} 1 \\ 2 \\ 3 \\ 1 & 2 \end{matrix}$$

```
1 \$\bordermatrix*[\{\}]{%
2   x1 & x2 & 1 \cr
3   x3 & x4 & 2 \cr
4   x5 & x6 & 3 \cr
5   1 & 2
6 }$
```

There is now an optional argument for the parenthesis with () as the default one. To get such a behaviour, write into the preamble:

```
1 \makeatletter
2 \newif\if@borderstar
3 \def\bordermatrix{\@ifnextchar*{%
4   \@borderstartrue\@bordermatrix@i}{\@borderstarfalse\@bordermatrix@i
5   *}}%
6 \def\@bordermatrix@i*{\@ifnextchar[{\@bordermatrix@ii}{%
7   \@bordermatrix@ii[()]}}
8 \def\@bordermatrix@ii[#1]#2{%
9   \begingroup
10   \m@th@\tempdima8.75\p@\setbox\z@\vbox{%
11     \def\cr{\crr\noalign{\kern 2\p@\global\let\cr\endline }%
12     \ialign {\$\#\$\hfil\kern 2\p@\kern\@tempdima & \thinspace %
13     \hfil \$\#\$\hfil \& \quad\hfil \$\#\$\hfil\crr\omit\strut %
14     \hfil\crr\noalign{\kern -\baselineskip}#2\crr\omit %
15     \strut\cr}%
16     \setbox\tw@\vbox{\unvcopy\z@\global\setbox\@ne\lastbox}%
17     \setbox\tw@\hbox{\unhbox\@ne\unskip\global\setbox\@ne\lastbox}%
18     \setbox\tw@\hbox{%
19       $ \kern\wd\@ne\kern -\@tempdima\left\@firstoftwo#1 %
20       \if@borderstar\kern2pt\else\kern -\wd\@ne\fi %
21       \global\setbox\@ne\vbox{\box\@ne\if@borderstar\else\kern 2\p@\fi}%
22       \vcenter{\if@borderstar\else\kern -\ht\@ne\fi %
23       \unvbox\z@\kern-\if@borderstar2\fi\baselineskip}%
24       \if@borderstar\kern-2\@tempdima\kern2\p@\else\,,\fi\right\%
25       @secondoftwo#1 $ %
26     }\null\; \vbox{\kern\ht\@ne\box\tw@}%
27   }%
28 \endgroup
29 }%
30 \makeatother
```

The `matrix` environment macro cannot be used together with the \mathcal{AM} Smath package, it redefines this environment (see section 26.6 on page 65).

6 Super/Subscript and limits

Writing a_{\min} and a_{\max} gives the same depth for the subscript, but writing them in upright mode with `\mbox` gives a different depth: a_{\min} and a_{\max} . The problem is the different height, which can be modified in several ways

- `$a_{\mbox{\vphantom{i}}\max}$`: a_{\min} and a_{\max} ;
- `$a_{\mathsf{max}}`: a_{\min} and a_{\max} ;
- `$a_{\max}`: a_{\min} and a_{\max} . Both are predefined operators (see section 16 on page 43).

6.1 Multiple limits

For general information about limits read section 2.1 on page 11. With the T_EX command `\atop` multiple limits for a `\sum` or `\prod` are possible. The syntax is:

above
below

`\[{above \atop below} \]`

which is nearly the same as a fraction without a rule. This can be enhanced to `a\atop b\atop c` and so on. For equation 21 do the following steps:

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (21)$$

```

1 \begin{equation}\label{eq:atop}
2 \sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} \atop
3 \quad \atop
4 \quad a_{ij} b_{jk} c_{ki}
5 \end{equation}

```

which is not the best solution because the space between the lines is too big. The \mathcal{AM} Smath package provides several commands for limits (section 35 on page 72) and the `\underset` and `\overset` commands (see section 41 on page 80).

6.2 Problems

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (22)$$

The equation 22 shows that the horizontal alignment is not optimal, because the math expression on the right follows at the end of the limits

which are a unit together with the sum symbol. There is an elegant solution with \mathcal{AM} Smath, described in subsection 35.2 on page 73. If you do not want to use \mathcal{AM} Smath, then use `\makebox`. But there is a problem when the general fontsize is increased, `\makebox` knows nothing about the actual math font size. Equation 23a shows the effect and equation 23b the view without the boxes.

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (23a)$$

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (23b)$$

```

1 \begin{equation}
2 \sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} \makebox[0pt]{%
3   {\scriptstyle 1 \leq j \leq p \atop
4   {1 \leq j \leq q \atop
5   {1 \leq k \leq r}}}} %}
6 \end{equation}

```

7 Roots

The square root `\sqrt` is the default for L^AT_EX and the n -th root can be inserted with the optional parameter `\sqrt[n]{...}`. . . `\sqrt`

$$\sqrt{x} \quad \sqrt[3]{x}$$

There is a different typesetting in roots. Equation 24 has different heights for the roots, whereas equation 25 has the same one. This is possible with the `\vphantom` command, which reserves the vertical space (without a horizontal `\vphantom`) of the parameter height.

$$\sqrt{a} \sqrt{T} \sqrt{2\alpha k_{B_1} T^i} \quad (24)$$

```

1 \begin{equation}
2 \sqrt{a}, %
3 \sqrt{T}, %
4 \sqrt{2\alpha k_{B_1} T^i} \label{eq:root1}
5 \end{equation}

```

$$\sqrt{a} \sqrt{T} \sqrt{2\alpha k_{B_1} T^i} \quad (25)$$

```

1 \begin{equation} \label{eq:root2}
2 \sqrt{a} \vphantom{k_{B_1} T^i}, %
3 \sqrt{T} \vphantom{k_{B_1} T^i}, %
4 \sqrt{2\alpha k_{B_1} T^i}
5 \end{equation}

```

The typesetting looks much better, especially when the formula has different roots in a row, like equation 24. Using \mathcal{AM} Smath with the `\smash` command⁹ gives some more possibilities for the typesetting of roots (see section 30 on page 69).

⁹The `\smash` command exists also in L^AT_EX but without an optional argument, which makes the use for roots possible.

8 Brackets, braces and parentheses

This is one of the major problems inside the math mode, because there is often a need for different brackets, braces and parentheses in different size. At first we had to admit, that there is a difference between the characters “()[]/\{\}||[]{}↑↑↓↓↔↔” and their use as an argument of the `\left` and `\right` command, where L^AT_EX stretches the size in a way that everything between the pair of left and right parentheses is smaller than the parentheses themselves. In some cases¹⁰ it may be useful to choose a fixed height, which is possible with the `\big`-series. Instead of writing `\leftX` or `\rightX` one of the following commands can be chosen:

default	$() / \{ \} [] \langle \rangle \uparrow\uparrow \downarrow\downarrow \leftrightarrow\leftrightarrow$	<code>\bigX</code>
<code>\bigX</code>	$() \{ \} [] \langle \rangle \uparrow\uparrow \downarrow\downarrow \leftrightarrow\leftrightarrow$	<code>\BigX</code>
<code>\BigX</code>	$() \{ \} [] \langle \rangle \uparrow\uparrow \downarrow\downarrow \leftrightarrow\leftrightarrow$	<code>\biggX</code>
<code>\biggX</code>	$() \{ \} [] \langle \rangle \uparrow\uparrow \downarrow\downarrow \leftrightarrow\leftrightarrow$	<code>\BiggX</code>
<code>\BiggX</code>	$() \{ \} [] \langle \rangle \uparrow\uparrow \downarrow\downarrow \leftrightarrow\leftrightarrow$	

Only a few commands can be written in a short form like `\big(`. The “X” has to be replaced with one of the following characters or commands from table 3 on the next page, which shows the parentheses character, its code for the use with one of the “big” commands and an example with the code for that.

For all commands there exists a left/right version `\bigl`, `\bigr`, `\Bigl` and `\Bigr` and so on, which only makes sense when writing things like:

$$\left) \times \frac{a}{b} \times \left(\quad (26)$$

$$\right) \times \frac{a}{b} \times \left(\quad (27)$$

```

1 \begin{align}
2 \ \biggl) \times \frac{a}{b} \times \biggr(
3 \end{align}
4 \begin{align}
5 \ \bigg) \times \frac{a}{b} \times \bigg(
6 \end{align}
```

L^AT_EX takes the `\biggl)` as a mathopen symbol, which has by default another horizontal spacing.

In addition to the above commands there exist some more: `\bigm`, `\Bigm`, `\biggm` and `\Biggm`, which work as the standard ones (without the additional “m”) but add some more horizontal space between the delimiter and the formula before and after (see table 2 on the following page).

¹⁰See section 8.1.1 on the following page for example.

$$\left(\begin{array}{c|c} 1 & 3 \\ \hline 3 & 4 \end{array} \right)$$

```
$\bigg(\displaystyle\frac{1}{3}\bigg|\frac{3}{4}\bigg)$
```

$$\left(\begin{array}{c|c} 1 & 3 \\ \hline 3 & 4 \end{array} \right)$$

```
$\bigg(\displaystyle\frac{1}{3}\bigg|\frac{3}{4}\bigg)$
```

Table 2: Difference between the default `\bigg` and the `\biggm` command

Char	Code	Example	Code
()	()	$3(a^2 + b^2)$	$3\Bigl(a^2+b^2\Bigr)$
[]	[]	$3[a^2 + b^2]$	$3\Bigl[a^2+b^2\Bigr]$
/ \	/\backslash	$3/a^2 + b^2\backslash$	$3\Bigl/\frac{a^2+b^2}{a^2+b^2}\Bigr.\backslash$
{ }	\{\}	$3\{a^2 + b^2\}$	$3\Bigl\{a^2+b^2\Bigr\}$
	\Vert	$3\Bigl a^2 + b^2\Bigr $	$3\Bigl a^2+b^2\Bigr \Vert$
[]	\lfloor \rfloor	$3\Bigl\lfloor a^2 + b^2 \Bigr\rfloor$	$3\Bigl\lfloor a^2+b^2 \Bigr\rfloor$
\lceil \rceil	\lceil \rceil	$3\Bigl\lceil a^2 + b^2 \Bigr\rceil$	$3\Bigl\lceil a^2+b^2\Bigr\rceil$
\langle \rangle	\langle \rangle	$3\Bigl\langle a^2 + b^2 \Bigr\rangle$	$3\Bigl\langle a^2+b^2\Bigr\rangle$
\uparrow \uparrow	\uparrow \uparrow	$3\Bigl\uparrow a^2 + b^2\Bigr\uparrow$	$3\Bigl\uparrow a^2+b^2\Bigr\uparrow$
\downarrow \downarrow	\downarrow \downarrow	$3\Bigl\downarrow a^2 + b^2\Bigr\downarrow$	$3\Bigl\downarrow a^2+b^2\Bigr\downarrow$
\updownarrow \updownarrow	\updownarrow \updownarrow	$3\Bigl\updownarrow a^2 + b^2\Bigr\updownarrow$	$3\Bigl\updownarrow a^2+b^2\Bigr\updownarrow$

Table 3: Use of the different parentheses for the “big” commands

8.1 Examples

8.1.1 Braces over several lines

The following equation in the single line mode looks like

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i < j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k \frac{28}{[2\nabla_i R_{jk} - \nabla_k R_{ij}]} \right) \quad (28)$$

and is too long for the text width and the equation number has to be placed under the equation.¹¹ With the array environment the formula can be split in two smaller pieces:

¹¹In standard L^AT_EX the equation and the number are printed one over the other for

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i < j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \right. \\ \left. + \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (29)$$

It is obvious that there is a problem with the right closing parentheses. Because of the two pairs “`\left(... \right.)`” and “`\left. ... \right)`” they have a different size because every pair does it in its own way. Using the `\Bigg` command changes this into a better typesetting:

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i < j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \right. \\ \left. + \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (30)$$

```

1  {\arraycolsep=2pt
2  \begin{equation}
3  \begin{array}{rcl}
4    \frac{1}{2}\Delta(f_{ij}f^{ij}) & = & 2\Bigg( \frac{1}{2}\Delta(f_{ij}f^{ij}) \\
5    & & \text{\scriptsize displaystyle} \\
6    & & \sum_{i < j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \\
7    & & + \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \Bigg) \\
8    & & \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \\
9  \end{array}
10 \end{equation}
11 }
```

Section 26.3.1 on page 61 shows another solution for getting the right size for parentheses when breaking the equation in smaller pieces.

$$B(r, \phi, \lambda) = \frac{\mu}{r} \left[\sum_{n=2}^{\infty} \left(\left(\frac{R_e}{r} \right)^n J_n P_n(s\phi) + \sum_{m=1}^n \left(\frac{R_e}{r} \right)^n (C_{nm} \cos m\lambda + S_{nm} \sin m\lambda) P_{nm}(s\phi) \right) \right]$$

```

1 \begin{aligned}
2   B(r, \phi, \lambda) & = & \frac{\mu}{r} \Bigg[ \sum_{n=2}^{\infty} \Bigg( \left( \frac{R_e}{r} \right)^n J_n P_n(s\phi) \\
3   & & + \sum_{m=1}^n \left( \frac{R_e}{r} \right)^n (C_{nm} \cos m\lambda + S_{nm} \sin m\lambda) P_{nm}(s\phi) \Bigg) \Bigg]
4 \end{aligned}
```

too long formulas. Only $\mathcal{A}\mathcal{M}\mathcal{S}\text{math}$ puts it one line over (left numbers) or under (right numbers) the formula.

```

5 |   (C_{nm}\cos m\lambda + S_{nm}\sin m\lambda) P_{nm}(s\phi) \ 
6 |   Bigg)\Bigg]
6 | \end{align*}

```

8.1.2 Middle bar

See section 47.6 on page 100 for examples and the use of package `braket`.

8.2 New delimiters

The default delimiters are defined in the file `fontmath.ltx` which is stored in general in `[TEXMF]/tex/latex/base/fontmath.ltx`. If we need for example a thicker vertical symbol than the existing `\vert` symbol we can define in the preamble:

```

1 | \DeclareMathDelimiter{\Norm}{\mathord}{largesymbols}{3E}{largesymbols}{3E}
2 |

```

The character number $3E_{16}$ (decimal 62) from the `cmex10` font is the small thick vertical rule. Now the new delimiter `\Norm` can be used in the usual way:

$\left \begin{array}{c} *BLA* \\ *BLA* \\ \hline *BLUB* \end{array} \right $	$1 \$\left\langle \Norm *BLA* \right\rangle \Norm\$$ $2 \$\left\langle \Norm \right. \dfrac{*BLA*}{*BLUB*} \left. \Norm \right\>\$$
--	--

8.3 Problems with parentheses

It is obvious that the following equation has not the right size of the parenthesis in the second integral, the inner one should be a bit smaller than the outer one.

$$\int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt$$

```

1 \[
2 \int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt
3 F' \left( \gamma(t) \right) \cdot \gamma'(t) dt
4 \]

```

The problem is that TeX controls the height of the parenthesis with `\delimitershortfall` and `\delimiterfactor`, with the default values

```

\delimitershortfall=5pt
\delimiterfactor=901

```

`\delimiterfactor/1000` is the relative size of the parenthesis for a given formula environment. They could be of `\delimitershortfall` too short. These values are valid at the end of the formula, the best way is to set them straight before the math environment or globally for all in the preamble.

$$\int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt$$

```

1 {\delimitershortfall=-1pt
2 \[
3 \int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt
4 F' \left( \gamma(t) \right) \cdot \gamma'(t) dt
5 \]}

```

9 Text in math mode

Standard text in math mode should be written in upright shape and not in the italic one. This shape is reserved for the variable names: *I am text inside math.* (see also [Table 7 on page 34](#)). There are different ways to write text inside math.

- `\mathrm`. It is like math mode (no spaces), but in upright mode
- `\textrm`. Upright mode with printed spaces (real textmode)
- `\mbox`. The font size is still the one from `\textstyle` (see [section 12 on page 38](#)), so that you have to place additional commands when you use `\mbox` in a super- or subscript for limits.

`\textstyle
\mbox
\mathrm`

Inserting long text is possible with a `\parbox`, which can be aligned as usual to the top, bottom or center, e.g.,

$$a + b + c + d + ef = g + h + i + j + k \quad \begin{array}{l} \text{this is a very long} \\ \text{description of a for-} \\ \text{mula} \end{array} \quad (31)$$

```

1 \begin{eqnarray}
2   a+b+c+d+ef & = & g+h+i+j+k \\
3   \qquad\qquad\qquad \backslash parbox[t]{.25\ linewidth}{%
4     this is a very long description of a formula} \\
5 }
6 \end{eqnarray}
```

Additional commands for text inside math are provided by \mathcal{AMS} math (see [section 37 on page 76](#)).

10 Font commands

10.1 Old-style font commands

Should never be used, but are still present and supported by L^AT_EX. The default syntax for the old commands is

```
1 {\XX test}
```

Table [4 on the following page](#) shows what has to be replaced for the `XX`. The major difference to the new style is that these `\XX` are toggling the actual math mode into the “XX” one, whereas the new commands start which, at its end, switches back to the previous mode.

$\backslash\text{bf} \quad \text{test} \mid \backslash\text{cal} \quad \mathcal{T}\mathcal{E}\mathcal{S}\mathcal{T} \mid \backslash\text{it} \quad \text{test} \mid \backslash\text{rm} \quad \text{test} \mid \backslash\text{tt} \quad \text{test}$

Table 4: Old font style commands

10.2 New-style font commands

The default syntax is

```
1 \mathXX{test}
```

Table 5 shows what has to be replaced for the XX. See section [47.13 on page 107](#) for additional packages.

\mathrm
\mathfrak
\mathcal
\mathsf
\mathbb
\mathtt
\mathit
\mathbf

Table 5: Fonts in math mode

Command	Test
default	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathfrak ^a	$\mathfrak{ABCDEFHIJKLMNOPQRSTUVWXYZ}$ $\mathfrak{abcdefghijklmnopqrstuvwxyz}$
\mathcal ^a	$\mathcal{ABCDEFHIJKLMNOPQRSTUVWXYZ}$ $\mathcal{abcdefghijklmnopqrstuvwxyz}$
\mathsf	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathbb ^a	$\mathbb{ABCDEFHIJKLMNOPQRSTUVWXYZ}$ $\mathbb{abcdefghijklmnopqrstuvwxyz}$
\mathtt	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathit	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathrm	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathbf	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$
\mathds ^b	$ABCDEFHIJKLMNOPQRSTUVWXYZ$ $abcdefghijklmnopqrstuvwxyz$

^aNot available for lower letters. For mathcal exists a non free font for lower letters (<http://www.pctex.com>)

^bNeeds package `dsfont`

11 Space

11.1 Math typesetting

LaTeX defines the three math lengths¹² with the following values¹³:

\thinmuskip
\medmuskip
\thickmuskip

¹²For more information see: <http://www.tug.org/utilities/plain/cseq.html>

¹³see `fontmath.ltx`

```

1 \thinmuskip=3mu
2 \medmuskip=4mu plus 2mu minus 4mu
3 \thickmuskip=5mu plus 5mu

```

where `mu` is the abbreviation for math unit.

$$1\text{mu} = \frac{1}{18}\text{em}$$

default	$f(x) = x^2 + 3x_0 \cdot \sin x$
\thinmuskip=0mu	$f(x) = x^2 + 3x_0 \cdot \sin x$
\medmuskip=0mu	$f(x) = x^2 + 3x_0 \cdot \sin x$
\thickmuskip=0mu	$f(x) = x^2 + 3x_0 \cdot \sin x$
all set to zero	$f(x) = x^2 + 3x_0 \cdot \sin x$

Table 6: The meaning of the math spaces

These lengths can have all glue and are used for the horizontal spacing in math expressions where TeX puts spaces between symbols and operators. The meaning of these different horizontal skips is shown in table 6. For a better typesetting L^AT_EX inserts different spaces between the symbols.

\thinmuskip space between ordinary and operator atoms

\medmuskip space between ordinary and binary atoms in display and text styles

\thickmuskip space between ordinary and relation atoms in display and text styles

11.2 Additional horizontal spacing

LaTeX defines the following short commands:

```

\def\>{\mskip\medmuskip}
\def\;{\mskip\thickmuskip}
\def\!{\mskip-\thinmuskip}

```

```

\thinspace
\medspace
\thickspace
\negthinspace
\negmedspace
\negthickspace

```

In math mode there is often a need for additional tiny spaces between variables, e.g., $L \frac{di}{dt}$ written with a tiny space between L and $\frac{di}{dt}$ looks nicer:

$L \frac{di}{dt}$. Table 7 shows a list of all commands for horizontal space which can be used in math mode. The “space” is seen “between” the boxed a and b. For all examples a is `\boxed{a}` and b is `\boxed{b}`. The short forms for some spaces may cause problems with other packages. In this case use the long form of the commands.

```

\hskip
\phantom
\kern

```

Positive Space	Negative Space
\$ab\$	
\$a b\$	
\$a\ b\$	
\$a\mbox{\textvisiblespace}b\$	
\$a\,,\,b\$ (\$a\thinspace b\$)	
\$a\colon\, b\$ (\$a\medspace b\$)	
\$a\;,\, b\$ (\$a\thickspace b\$)	
\$a\quad b\$	
\$a\qquad b\$	
\$a\hspace{0.5cm}b\$	
\$a\kern0.5cm b\$	
\$a\hphantom{xx}b\$	
\$axxb\$	

Table 7: Spaces in math mode

11.3 Problems

Using `\hphantom` in mathmode depends to on object. `\hphantom` reserves only the space of the exact width without any additional space. In the following example the second line is wrong: & `\hphantom{\rightarrow} b\`.` It does not reserve any additional space.

```

1 \begin{align*}
2 a & \rightarrow b \\
3 & & \hphantom{\rightarrow} b \\
4 & & \& \mkern\thickmuskip\hphantom{\rightarrow}\mkern\thickmuskip b \\
5 & & \& \mathrel{\hphantom{\rightarrow}} b \\
6 \end{align*}

```

This only works when the math symbol is a mathrel one, otherwise you have to change the horizontal space to `\medmuskip` or `\thinmuskip` or to use an empty group after the `\hphantom` command. For more informations about the math objects look into `fontmath.ltx` or `amssymb` or use the `\show` macro, which prints out the type of the mathsymbol, e.g., `\show\rightarrow` with the output:

```

1 > \rightarrow=\mathchar"3221 .
2 1.20 \show\rightarrow

```

The first digit represents the type:

- 0 : ordinary
- 1 : large operator
- 2 : binary operation
- 3 : relation
- 4 : opening
- 5 : closing
- 6 : punctuation
- 7 : variable family

Grouping a math symbol can change the behaviour in horizontal spacing. Compare 50×10^{12} and $50 \cdot 10^{12}$, the first one is typeset with $\$50\backslash times10^{12}\$$ and the second one with $\$50\{\backslash times\}10^{12}\$$. Another possibility is to use the `numprint` package.¹⁴

11.4 Dot versus comma

In difference to a decimal point and a comma as a marker of thousands a lot of countries prefer it vice versa. To get the same behaviour the meaning of dot and comma has to be changed:

`\mathpunct`
`\mathord`

1,234,567.89 default (32)

1.234.567,89 vice versa, wrong spacing (33)

1.234.567,89 correct spacing (34)

```

1 %\usepackage{amsmath}
2 1,234,567.89 & \text{ default}\\
3 1.234.567,89 & \text{ vice versa, wrong spacing}\\
4 1\mathpunct{.}234\mathpunct{.}567\{,\}89 & \text{ correct}
    spacing

```

The original definitions from `fontmath.ltx`¹⁵ are

```

\DeclareMathSymbol{,}{\mathpunct}{letters}{3B}
\DeclareMathSymbol{.}{\mathord}{letters}{3A}

```

`\mathord` and `\mathpunct` can be changed for a documentwide other behaviour. In the above equation 33 the comma is only set in a pair of braces `{,}`, which is the same as writing `\mathord{,}` because L^AT_EX handles everything inside of parentheses as a formula, which gets the same spacing.

It is also possible to use the package `icomma`¹⁶ for a documentwide correct spacing.

¹⁴CTAN://macros/latex/contrib/numprint/

¹⁵Located in `texmf/tex/latex/base/`

¹⁶CTAN:// macros/latex/contrib/was/

11.5 Vertical whitespace

11.5.1 Before/after math expressions

There are four predefined lengths, which control the vertical whitespace of displayed formulas:

```
\abovedisplayskip=12pt plus 3pt minus 9pt
\abovedisplayshortskip=0pt plus 3pt
\belowdisplayskip=12pt plus 3pt minus 9pt
\belowdisplayshortskip=7pt plus 3pt minus 4pt
```

The short skips are used if the formula starts behind the end of the foregoing last line. Only for demonstration the short skips are set to 0pt in the following examples and the normal skips to 20pt without any glue:

The line ends before.

$$f(x) = \int \frac{\sin x}{x} dx \quad (35)$$

The line doesn't end before the formula.

$$f(x) = \int \frac{\sin x}{x} dx \quad (36)$$

And the next line starts as usual with some text ...

```
1 \abovedisplayshortskip=0pt
2 \belowdisplayshortskip=0pt
3 \abovedisplayskip=20pt
4 \belowdisplayskip=20pt
5 \noindent The line ends before.
6 \begin{equation}
7   f(x) = \int \frac{\sin x}{x}, \mathbf{d}x
8 \end{equation}
9 \noindent The line doesn't end before the formula.
10 \begin{equation}
11   f(x) = \int \frac{\sin x}{x}, \mathbf{d}x
12 \end{equation}
13 \noindent And the next line starts as usual with some text
... 
```

When using the `fleqn` classoption for left aligned equations the math environments `equation` and `\[...]` are typeset as a list. This is the reason why the vertical space is defined by the length registers for a list, especially `\topsep`, instead of `\abovedisplayskip` and `\belowdisplayskip`. This doesn't effect the `eqnarray` environment.

`fleqn` class option

11.5.2 Inside math expressions

`\[<length>]` This works inside the math mode in the same way as in the text mode.

\jot The vertical space between the lines for all math expressions which allow multiple lines can be changed with the length **\jot**, which is predefined as

```
\newdimen\jot \jot=3pt
```

The following three formulas show this for the default value, **\setlength{\jot}{0pt}** and **\setlength{\jot}{10pt}**.

$$\begin{array}{lll} y = d & y = d & y = d \\ y = c\frac{1}{x} + d & y = c\frac{1}{x} + d & y = c\frac{1}{x} + d \\ y = b\frac{1}{x^2} + cx + d & y = b\frac{1}{x^2} + cx + d & y = b\frac{1}{x^2} + cx + d \end{array}$$

Defining a new environment with a parameter makes things easier, because changes to the length are locally.

```
1 \newenvironment{mathspace}[1]{%
2   \setlength{\jot}{#1}%
3   \ignorespaces%
4 }{%
5   \ignorespacesafterend%
6 }
```

\arraystretch The vertical space between the lines for all math expressions which contain an **array** environment can be changed with the command **\arraystretch**, which is predefined as

```
\renewcommand{\arraystretch}{1}
```

Renewing this definition is global to all following math expressions, so it should be used in the same way as **\jot**.

\vskip Another spacing for single lines is possible with the **\vskip** macro:

```
1 \[
2 \begin{pmatrix}
3 0 & 1 & 1 & 0 & 0 & 1 \\
4 1 & 0 & 0 & 1 & 1 & 0 \\
5 0 & 1 & 1 & 0 & \frac{1}{\sqrt{2}} & 1 \\
6 1 & 0 & 1 & 0 & 1 & 0 \\
7 0 & 1 & 0 & 1 & 0 & 1
8 \end{pmatrix}
9 \noalign{\vskip2pt}
10 \noalign{\vskip2pt}
11 \end{pmatrix}
```

Package setspace To have all formulas with another vertical spacing, one can choose the package **setspace** and redefining some of the math macros, e.g.,

```
1 \newcommand*\Array[2][1]{\setstretch{\#1}\array{\#2}}
2 \let\endArray\endarray
```

```
1 [
2 \begin{Array}[2][cc]
3 a =&b\\
4 a =&b\\
5 a =&b
6 \end{Array}
7 ]
8
9 text $ \begin{Array}{cc}
10 a =&b\\
11 a =&b\\
12 a =&b
13 \end{Array} $ text
```

12 Styles

Mode	Inline	Displayed
default	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
\displaystyle	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
\scriptstyle	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
\scriptscriptstyle	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
\textstyle	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$

Table 8: Math styles

This depends on the environment in which they are used. An inline formula has a default math fontsize called **\textstyle**, which is smaller than the one for a display formula (see section 3), which is called **\displaystyle**. Beside this predefinition there are two other special fontstyles for math, **\scriptstyle** and **\scriptscriptstyle**. They are called “style” in difference to “size”, because they have a dynamic character, their real fontsize belongs to the environment in which they are used. A fraction for example is by default

```
\textstyle
\displaystyle
\scriptstyle
\scriptscriptstyle
```

in scriptstyle when it is in an inline formula like this $\frac{a}{b}$, which can be changed to $\frac{a}{b}$. This may be in some cases useful but it looks in general ugly because the line spacing is too big. These four styles are predefined and together in a logical relationship. It is no problem to use the other styles like large, `\Large`, ... **outside** the math environment. For example a fraction written with $\frac{a}{b}$ `\Huge`: $\frac{a}{b}$ (`\Huge$\frac{a}{b}$`). This may cause some problems when you want to write a displayed formula in another fontsize, because it also affects the interline spacing of the preceding part of the paragraph. If you end the paragraph, you get problems with spacing and page breaking above the equations. So it is better to declare the font size and then restore the baselines:

$$\int_1^2 \frac{1}{x^2} dx = 0.5 \quad (37)$$

```

1 \makeatletter
2 \newenvironment{smallequation}[1]{%
3   \skip@=\baselineskip
4   #1%
5   \baselineskip=\skip@
6   \equation
7 }{\endequation \ignorespacesafterend}
8 \makeatother
9
10 \begin{smallequation}{\tiny}
11 \int_1^2 \frac{1}{x^2}, \mathbf{x}=0.5
12 \end{smallequation}

```

If you use this the other way round for huge fontsizes, don't forget to load package `exscale` (see section 47.14 on page 107). Also see this section for diffent symbol sizes.

13 Dots

In addition to the above decorations there are some more different dots which are single commands and not by default over/under a letter. It is not easy to see the differences between some of them. Dots from lower left to upper right are possible with `\reflectbox{\ddots}` ..

<code>\cdots</code>	<code>\ddots</code>	<code>\dotsb</code>	<code>\dotsc</code>	<code>\dotsi</code>	<code>\dotsm</code>	<code>\dotso</code>	<code>\ldots</code>	<code>\vdots</code>
<code>\dotsm</code>	<code>\dotso</code>	<code>\ldots</code>	<code>\vdots</code>					

Table 9: Dots in math mode

14 Accents

The letter “a” is only for demonstration. The table 10 shows all in standard L^AT_EX available accents and also the ones placed under a character. With package `amssymb` it is easy to define new accents. For more information see section 31 on page 69 or other possibilities at section 47.1 on page 97.

\acute{a}	\bar{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{a}	\overline{a}	\underbrace{a}	\underbar{a}	\overleftarrow{a}	\overrightarrow{a}	\underleftarrow{a}	\underrightarrow{a}	\widetilde{a}
\bar{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\check{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\dot{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\mathring{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\overleftarrow{a}	\overleftarrow{\acute{a}}	\overleftarrow{\breve{a}}	\overleftarrow{\grave{a}}	\overleftarrow{\ddot{a}}	\overleftarrow{\dot{a}}	\overleftarrow{\mathring{a}}	\overbrace{}	\overbrace{}	\overbrace{}	\overbrace{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\tilde{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\underleftarrow{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\underrightarrow{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}
\widetilde{a}	\acute{a}	\breve{a}	\grave{a}	\ddot{a}	\dot{a}	\mathring{a}	\overbrace{}	\overline{}	\underbrace{}	\underbar{}	\overleftarrow{}	\overrightarrow{}	\underleftarrow{}	\underrightarrow{}	\widetilde{}

Table 10: Accents in math mode

The letters *i* and *j* can be substituted with the macros `\imath` and `\jmath` when an accents is placed over these letters and the dot should disappear: $\vec{i}\vec{j}$ ($\vec{\imath}\vec{\jmath}$) ($\vec{\mathbf{v}\imath}$) ($\vec{\mathbf{v}\jmath}$). \mathbf{v} is the vector command.

Accents can be used in different ways, e.g., strike a single character with a horizontal line like \mathring{A} or $\mathring{\mathbf{A}}$. In section 47.7 on page 101 is a better solution for more than one character.

14.1 Over- and underbrackets

There are no `\underbracket` and `\overbracket` commands in the list of accents. They can be defined in the preamble with the following code.

```

1 \makeatletter
2 \def\@underbracket#1{%
3   \ifnextchar[{ \@underbracket{#1}{\@underbracket[\@bracketheight]{#1}}%
4 }
5 \def\@underbracket[#1]{%
6   \ifnextchar[{ \@underbracket[#1]{\@underbracket[#1][0.4em]{#1}}%
7 }
8 \def\@underbracket[#1][#2]{%
9   \mathop{\vtop{\m@th \ialign {\##\crcr $ \hfil \displaystyle {#3} \hfil $%
10    \crcr \noalign {\kern 3\p@ \nointerlineskip } \upbracketfill {#1}{#2}%
11    \crcr \noalign {\kern 3\p@ }}}}\limits}%
12 \def\upbracketfill#1#2{$\m@th \setbox\z@\hbox{$\brace{#1}{#2}$}%
13   \edef\@bracketheight{\the\ht\z@}\bracketend{#1}{#2}%
14   \leaders \vrule \@height #1 \@depth \z@ \hfill%
15   \leaders \vrule \@height #1 \@depth \z@ \hfill \bracketend{#1}{#2}$
}


```

```
16 \def\bracketend#1#2{\vrule height #2 width #1\relax}
17 \makeatother
```

1. `\underbrace{...}` is an often used command:

$$\underbrace{x^2 + 2x + 1}_{(x+1)^2} = f(x) \quad (38)$$

2. Sometimes an **underbracket** is needed, which can be used in more ways than `\underbrace{...}`. An example for `\underbracket{...}`:



14.1.1 Use of `\underbracket{...}`

The `\underbracket{...}` command has two optional parameters:


- the line thickness in any valid latex unit, e.g., `1pt`
- the height of the edge brackets, e.g., `1em`

using without any parameters gives the same values for thickness and height as predefined for the `\underbrace` command.

1.	<code>\$\underbrace{foo~bar}\$</code>	<i>foo bar</i>
2.	<code>\$\underbracket[2pt]{foo~bar}\$</code>	<i>foo bar</i>
3.	<code>\$\underbracket[2pt][1em]{foo~bar}\$</code>	<i>foo bar</i>

14.1.2 Overbracket

In addition to the underbracket an overbracket is also useful, which can be used in more ways than `\overbrace{...}`. For example:



The `\overbracket{...}` command has two optional parameters:

- the line thickness in any valid latex unit, e.g., `1pt`
- the height of the edge brackets, e.g., `1em`

using without any parameters gives the same values for thickness and height as predefined for the `\overbrace` command.

1.	<code>\overbracket {foo\ bar}</code>	
2.	<code>\overbracket[2pt] {foo\ bar}</code>	
3.	<code>\overbracket[2pt][1em]{foo\ bar}</code>	

14.2 Vectors

Especially for vectors there is the package `esvect`¹⁷ package, which looks better than the `\overrightarrow`, e.g.,

<code>\vv{...}</code>	<code>\overrightarrow{...}</code>
\vec{d}	\overrightarrow{d}
\vec{abc}	\overrightarrow{abc}
\vec{i}	\overrightarrow{i}
\vec{A}_x	\overrightarrow{A}_x

Table 11: Vectors with package `esvect` (in the right column the default one from L^AT_EX)

Look into the documentation for more details about the package `esvect`.

15 Exponents and indices

The two active characters `_` and `^` can only be used in math mode. The **following** character will be printed as an index (`$y=a_1x+a_0$`: $y = a_1x + a_0$) or as an exponent (`$x^2+y^2=r^2$`: $x^2 + y^2 = r^2$). For more than the next character put it inside of {}, like `$a_{i-1}+a_{i+1}< a_i$`: $a_{i-1} + a_{i+1} < a_i$.

Especially for multiple exponents there are several possibilities. For example:

$$((x^2)^3)^4 = ((x^2)^3)^4 = \left((x^2)^3 \right)^4 \quad (39)$$

```

1 ((x^2)^3)^4 =
2 {{(x^2)}^3}}^4 =
3 {\left(\left(x^2\right)^3\right)^4}

```

¹⁷CTAN://macros/latex/contrib/esvect/

For variables with both exponent and indice index the order is not important, $\$a_1^2\$$ is exactly the same than $\$a^2_1\$$: $a_1^2 = a_1^2$. By default all exponents and indices are set as italic characters. It is possible to change this behaviour to get upright characters. The following example shows this for the indices.

```

1 $A_{\{abc_{\{xyz\}123def}\}^{\{abc123def\}}aa}$
2
3 \makeatletter
4 \catcode`\_=\active
5 \def_#1{\sb{\operator@font#1}}
6 \makeatother
7
8 $A_{\{abc_{\{xyz\}123def}\}^{\{abc123def\}}aa}$

```

16 Operators

They are written in upright font shape and are placed with some additional space before and after for a better typesetting. With the \mathcal{AM} Smath package it is possible to define one's own operators (see section [36 on page 75](#)). Table [12](#) and [13 on the following page](#) show a list of the predefined ones for standard L^AT_EX.

$\backslash coprod$	\coprod	$\backslash bigvee$	\bigvee	$\backslash bigwedge$	\bigwedge
$\backslash biguplus$	\biguplus	$\backslash bigcap$	\bigcap	$\backslash bigcup$	\bigcup
$\backslash intop$	\int	$\backslash int$	\int	$\backslash prod$	\prod
$\backslash sum$	\sum	$\backslash bigotimes$	\bigotimes	$\backslash bigoplus$	\bigoplus
$\backslash bigodot$	\bigodot	$\backslash ointop$	\oint	$\backslash oint$	\oint
$\backslash bigsqcup$	\bigsqcup	$\backslash smallint$	\smallint		

Table 12: The predefined operators of `fontmath.ltx`

The difference between $\backslash intop$ and $\backslash int$ is that the first one has by default over/under limits and the second subscript/superscript limits. Both can be changed with the $\backslash limits$ or $\backslash nolimits$ command. The same behaviour happens to the $\backslash ointop$ and $\backslash oint$ Symbols.

For more predefined operator names see table [20 on page 99](#). It is easy to define a new operator with

```

1 \makeatletter
2 \newcommand\foo{\mathop{\operator@font foo}\nolimits}
3 \makeatother

```

Now you can use $\backslash foo$ in the usual way:

```

foo12 = x2
1 \[ \foo_1^2 = x^2 \]

```

\log	log	\lg	lg	\ln	ln
\lim	lim	\limsup	lim sup	\liminf	lim inf
\sin	sin	\arcsin	arcsin	\sinh	sinh
\cos	cos	\arccos	arccos	\cosh	cosh
\tan	tan	\arctan	arctan	\tanh	tanh
\cot	cot	\coth	coth	\sec	sec
\csc	csc	\max	max	\min	min
\sup	sup	\inf	inf	\arg	arg
\ker	ker	\dim	dim	\hom	hom
\det	det	\exp	exp	\Pr	Pr
\gcd	gcd	\deg	deg	\bmod	mod
\pmod{a}	(mod a)				

Table 13: The predefined operators of `latex.ltx`

In this example `\foo` is defined with `\nolimits`, means that limits are placed in superscript/subscript mode and not over under. This is still possible with `\limits` in the definition or the equation:

$$\underset{1}{\overset{2}{\text{foo}}} = x^2$$

$$\boxed{\text{\textbackslash} [\text{\textbackslash} foo \text{\textbackslash} limits_1^2 = x^2 \text{\textbackslash}]}$$

AMSmath has an own macro for a definition, have a look at section 36 on page 75.

17 Greek letters

The *AMSmath* package simulates a bold font for the greek letters, it writes a greek character twice with a small kerning. The `\mathbf{<character>}` doesn't work with lower greek character. See section 40 on page 80 for the `\pmb` macro, which makes it possible to print bold lower greek letters. Not all upper case letters have own macro names. If there is no difference to the roman font, then the default letter is used, e.g., `A` for the upper case of `\alpha`. Table 14 shows only those upper case letters which have own macro names. Some of the lower case letters have an additional `var` option for an alternative.

lower	default	upper	default	<code>\mathbf</code>	<code>\mathit</code>
\alpha	α				
\beta	β				
\gamma	γ	\Gamma	Γ	Γ	Γ
\delta	δ	\Delta	Δ	Δ	Δ
\epsilon	ϵ				
\varepsilon	ε				

lower	default	upper	default	$\mathbf{}$	$\mathit{}$
<code>\zeta</code>	ζ				
<code>\eta</code>	η				
<code>\theta</code>	θ	<code>\Theta</code>	Θ	Θ	Θ
<code>\vartheta</code>	ϑ				
<code>\iota</code>	ι				
<code>\kappa</code>	κ				
<code>\lambda</code>	λ	<code>\Lambda</code>	Λ	Λ	Λ
<code>\mu</code>	μ				
<code>\nu</code>	ν				
<code>\xi</code>	ξ	<code>\Xi</code>	Ξ	Ξ	Ξ
<code>\pi</code>	π	<code>\Pi</code>	Π	Π	Π
<code>\varpi</code>	ϖ				
<code>\rho</code>	ρ				
<code>\varrho</code>	ϱ				
<code>\sigma</code>	σ	<code>\Sigma</code>	Σ	Σ	Σ
<code>\varsigma</code>	ς				
<code>\tau</code>	τ				
<code>\upsilon</code>	υ	<code>\Upsilon</code>	Υ	Υ	Υ
<code>\phi</code>	ϕ	<code>\Phi</code>	Φ	Φ	Φ
<code>\varphi</code>	φ				
<code>\chi</code>	χ				
<code>\psi</code>	ψ	<code>\Psi</code>	Ψ	Ψ	Ψ
<code>\omega</code>	ω	<code>\Omega</code>	Ω	Ω	Ω

Table 14: The greek letters

Bold greek letters are possible with the package `bm` (see section [47.5 on page 100](#)) and if they should also be upright with the package `upgreek`:

```
$\bm{\upalpha}, \bm{\upbeta} \dots \alpha, \beta...
```

A useful definition maybe:

```
1 \usepackage{upgreek}
2 \makeatletter
3 \newcommand{\bfgreek}[1]{\bm{@nameuse{up#1}}}
4 \makeatother
```

Then `\bfgreek{mu}` will allow you to type μ to obtain an upright boldface μ .

18 Pagebreaks

By default a displayed formula cannot have a pagebreak. This makes some sense, but sometimes it gives a better typesetting when a pagebreak is possible.

`\allowdisplaybreaks`

```
\allowdisplaybreaks
```

`\allowdisplaybreaks` enables T_EX to insert pagebreaks into displayed formulas whenever a newline command appears. With the command `\displaybreak` it is also possible to insert a pagebreak at any place.

19 \stackrel

`\stackrel` puts a character on top of another one which may be important if a used symbol is not predefined. For example “ $\overset{\wedge}{=}$ ” (`\stackrel{\wedge}{=}`). The syntax is

```
1 \stackrel{top}{base}
```

Such symbols may be often needed so that a macro definition in the preamble makes some sense:

```
1 \newcommand{\eqdef}{%
2   \ensuremath{%
3     \stackrel{\mathbf{def}}{=}%
4   }%
5 }
```

With the `\ensuremath` command we can use the new `\eqdef` command in text and in math mode, L^AT_EX switches automatically in math mode, which saves some keystrokes like the following command, which is written without the delimiters (\$...\$) for the math mode $\overset{\text{def}}{=}$, only `\eqdef` with a space at the end. In math mode together with another material it may look like $\vec{x} \overset{\text{def}}{=} (x_1, \dots, x_n)$ and as command sequence

```
1 $ \vec{x} \eqdef \left( x_1, \dots, x_n \right) $
```

The fontsize of the top is one size smaller than the one from the base, but it is no problem to get both the same size, just increase the top or decrease the base.

20 \choose

`\choose` is like `\atop` with delimiters or like `\frac` without the fraction line and also with delimiters. It is often used for binomial coefficients and has the following syntax:

```
1 {above \choose below}
```

`\choose`

The two braces are not really important but it is safe to use them.

$$\binom{m+1}{n} = \binom{m}{n} + \binom{m}{k-1} \quad (40)$$

```
1 {{m+1 \choose n}}={{m \choose n}}+{{m \choose k-1}}\label{eq:  
choose}
```

See section [29.2 on page 68](#) for the \mathcal{AM} Smath equivalents and enhancements.

21 Color in math expressions

There is no difference in using colored text and colored math expressions. With

```
\usepackage{color}
```

in the preamble the macro `\textcolor{<color>}{<text or math>}` exists.

$$f(x) = \int_1^{\infty} \frac{1}{x^2} dx = 1 \quad (41)$$

```
1 \begin{equation}  
2 \textcolor{blue}{f(x)} = \int \limits_1^{\infty} \textcolor{red}{\frac{1}{x^2}} , \mathbf{d}x = 1  
3 \end{equation}
```

If all math expressions should be printed in the same color, then it is better to use the `everydisplay` macro (section [24 on page 49](#)).

22 Boldmath

Writing a whole formula in bold is possible with the command sequence `\boldmath ... \unboldmath`, which itself must be written in textmode (outside the formula) or with the command `{\mathversion{bold} ... }`.

```
\mathversion  
\boldmath  
\unboldmath
```

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad \sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki}$$

```
1 \boldmath  
2 [\brack  
3 \sum_{%  
4 \makebox[0pt]{$%  
5 {\scriptscriptstyle 1 \leq j \leq p \atop 1 \leq j \leq q \atop 1 \leq k \leq r}}}%  
6 $}%  
7 }a_{ij}b_{jk}c_{ki}  
8 ]  
9 \unboldmath
```

The `\mathversion` macro defines a math style which is valid for all following math expressions. If you want to have all math in bold then use this macro instead of `\boldmath`. But it is no problem to put `\mathversion` inside a group to hold the changes locally.

$$y(x) = ax^3 + bx^2 + cx + d \quad (42)$$

```

1 \mathversion{bold}%
2 \begin{equation}
3 y(x) = ax^3+bx^2+cx+d
4 \end{equation}%

```

Single characters inside a formula can be written in bold with `\mathbf`, but only in upright mode, which is in general not useful as shown in equation 43. It is better to use package `bm` (see section 47.5 on page 100).

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} \mathbf{b}_{jk} c_{ki} \quad (43)$$

22.1 Bold math expressions as part of titles and items

By default the titles in sections, subsections, a.s.o. are printed in bold. Same for the `description` environment. The problem is that a math expression in one of these environments is printed in default font shape, like the following example for a `section` and `description` environment:

22 Function $f(x) = x^2$

This is $y = f(x)$ Only a demonstration.

And $z = f(x, y)$ Another demonstration.

With a redefinition of the `\section` and `\item` macros it is possible to get everything in bold font.

22 Function $f(x) = x^2$

This is $y = f(x)$ Only a demonstration.

And $z = f(x, y)$ Another demonstration.

```

1 \let\itemOld\item
2 \makeatletter
3 \renewcommand\item[1][]{%
4   \def\@tempa{\#1}
5   \ifx\@tempa\empty\itemOld\else\boldmath\itemOld[\#1]\unboldmath\fi%
}
```

```

6 }
7 \makeatother
8 \let\sectionOld\section
9 \renewcommand\section[2][\empty]{%
10   \boldmath\sectionOld[#1]{#2}\unboldmath%
11 }

```

23 Multiplying numbers

When the dot is used as the decimal marker as in the United States, the preferred sign for the multiplication of numbers or values of quantities is a cross (`\times`), not a half-high and centered dot (`\cdot`).

When the comma is used as the decimal marker as in Europe, the preferred sign for the multiplication of numbers is the half-high dot. The multiplication of quantity symbols (or numbers in parentheses or values of quantities in parentheses) may be indicated in one of the following ways: ab , $a \cdot b$, $a \times b$.

For more information see “Nist Guide to SI Units -More on Printing and Using Symbols and Numbers in Scientific and Technical Documents”¹⁸ or the German DIN 1304, Teil 1.

24 Other macros

There are some other macros which are not mentioned in the foregoing text. Here comes a not really complete list of these macros.

`\everymath`
`\everydisplay`
`\underline`

`\everymath` puts the argument before any inlined math expression, e.g., `\everymath{\displaystyle}`. Using this macro doesn't really make sense, when one is using footnotes because the footnote number is printed as superscript in inline mathmode and an `\everymath` will be valid, too.

`\everydisplay` puts the argument before any displayed math expression, e.g., `\everydisplay{\color{blue}}`.

`\underline` underlines a math expression and has to be used inside the math mode.

$$\underline{F(x) = \int f(x) dx}$$

¹⁸<http://physics.nist.gov/Pubs/SP811/sec10.html>

Part II

\mathcal{AM} Smath package

In general the \mathcal{AM} S packages are at least a collection of three different ones:

1. `amsmath.sty`
2. `amssymb.sty`
3. `amsfonts.sty`

In the following only the first one is described in detail.

The \mathcal{AM} Smath has the following options:

<code>centertags</code>	(default) For a split equation, place equation numbers vertically centered on the total height of the equation.
<code>tbtags</code>	'Top-or-bottom tags' For a split equation, place equation numbers level with the last (resp. first) line, if numbers are on the right (resp. left).
<code>sumlimits</code>	(default) Place the subscripts and superscripts of summation symbols above and below, in displayed equations. This option also affects other symbols of the same type – \prod , \coprod , \otimes , \oplus , and so forth – but excluding integrals (see below).
<code>nosumlimits</code>	Always place the subscripts and superscripts of summation-type symbols to the side, even in displayed equations.
<code>intlimits</code>	Like sumlimits, but for integral symbols.
<code>nointlimits</code>	(default) Opposite of intlimits.
<code>namelimits</code>	(default) Like sumlimits, but for certain 'operator names' such as <code>det</code> , <code>inf</code> , <code>lim</code> , <code>max</code> , <code>min</code> , that traditionally have subscripts placed underneath when they occur in a displayed equation.
<code>nonamelimits</code>	Opposite of namelimits.

To use one of these package options, put the option name in the optional argument, e.g., `\usepackage[intlimits]{amsmath}`. The \mathcal{AM} Smath also recognises the following options which are normally selected (implicitly or explicitly) through the `documentclass` command, and thus need not be repeated in the option list of the `\usepackage{amsmath}` statement.

<code>leqno</code>	Place equation numbers on the left.
<code>reqno</code>	(default) Place equation numbers on the right.
<code>fleqn</code>	Position equations at a fixed indent from the left margin rather than centered in the text column. \mathcal{AM} Smath defines the length <code>\mathindent</code> and uses it when the equations have only one tabbing character (&).

All math environments are displayed ones, so there is no special inline math.

25 align environments

There are four different align environments, described in the following subsections. Their behaviour is shown in table 15. The symbolic code for all align environments is:

```

1 \begin{<name>}
2   <name> &= x & x &= x \\
3   <name> &= x & x &= x
4 \end{<name>}
```

Table 15: Comparison between the different align environments with the same code, where the first three can have an equation number

$\boxed{\text{align}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$
$\boxed{\text{align}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$

$\boxed{\text{alignat}}$	$=$	$\boxed{x} \quad \boxed{x} = \boxed{x}$
$\boxed{\text{alignat}}$	$=$	$\boxed{x} \quad \boxed{x} = \boxed{x}$

$\boxed{\text{flalign}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$
$\boxed{\text{flalign}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$

$\boxed{\text{xalignat}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$
$\boxed{\text{xalignat}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$

$\boxed{\text{xxalignat}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$
$\boxed{\text{xxalignat}}$	$=$	\boxed{x}	$\boxed{x} = \boxed{x}$

In difference to the `eqnarray` environment from standard L^AT_EX (section 3.2), the “three” parts of one equation `expr. -symbol -expr.` are divided

by only one ampersand in two parts. In general the ampersand should be before the symbol to get the right spacing, e.g., $y \&= x$. Compare the following three equations, the second one has a wrong spacing.

$y = x$	1 $y \&= x$
$y =x$	2 $y =\& x$
$y = x$	3 $y =\{ \} \& x$

25.1 The default `align` environment

The `eqnarray` environment has a not so good spacing between the cells. Writing the equations no. 3 to 6 with the `align` environment gives:

$$y = d \tag{44}$$

$$y = cx + d \tag{45}$$

$$y_{12} = bx^2 + cx + d \tag{46}$$

$$y(x) = ax^3 + bx^2 + cx + d \tag{47}$$

The code looks like:

```

1 \begin{align}
2   y \&= d \label{eq:IntroSection} \\
3   y \&= cx+d \\
4   y_{12} \&= bx^{2}+cx+d \\
5   y(x) \&= ax^{3}+bx^{2}+cx+d
6 \end{align}

```

- The `align` environment has an implicit `\{rlrl...`} horizontal alignment with a vertical column-alignment, e.g.,

12	3	1 \begin{align*} 2 1 \& 2 \& 3 3 \end{align*}
----	---	---

- A nonumber-version `\begin{align*}... \end{align*}` exists.
- Unnumbered single rows are possible with `\nonumber`.
- The `align` environment takes the whole horizontal space if you have more than two columns:

$$y = d \qquad \qquad z = 1 \tag{48}$$

$$y = cx + d \qquad \qquad z = x + 1 \tag{49}$$

$$y_{12} = bx^2 + cx + d \qquad \qquad z = x^2 + x + 1$$

$$y(x) = ax^3 + bx^2 + cx + d \qquad \qquad z = x^3 + x^2 + x + 1 \tag{50}$$

The code for this example looks like

```

1 \begin{align}
2   y &= d & z &= 1 \\
3   y &= cx + d & z &= x + 1 \\
4   y_{12} &= bx^2 + cx + d & z &= x^2 + x + 1 \nonumber \\
5   y(x) &= ax^3 + bx^2 + cx + d & z &= x^3 + x^2 + x + 1
6 \end{align}

```

25.2 alignat environment

>From now the counting of the equation changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```
\renewcommand{\theequation}{\thepart-\arabic{equation}}.
```

```
\begin{align}
...
\end{align}
```

This means “align at several places” and is something like more than two `align` environments side by side. Parameter is the number of the `align` environments, which is not important for the user. The above last `align` example looks like:

$$y = d \quad z = 1 \quad (\text{II-51})$$

$$y = cx + d \quad z = x + 1 \quad (\text{II-52})$$

$$y_{12} = bx^2 + cx + d \quad z = x^2 + x + 1$$

$$y(x) = ax^3 + bx^2 + cx + d \quad z = x^3 + x^2 + x + 1 \quad (\text{II-53})$$

The parameter was 2 and it is 3 for the following example:

$$i_{11} = 0.25 \quad i_{12} = i_{21} \quad i_{13} = i_{23}$$

$$i_{21} = \frac{1}{3}i_{11} \quad i_{22} = 0.5i_{12} \quad i_{23} = i_{31} \quad (\text{II-54})$$

$$i_{31} = 0.33i_{22} \quad i_{32} = 0.15i_{32} \quad i_{33} = i_{11} \quad (\text{II-55})$$

For this example the code is:

```

1 \begin{alignat}{3}
2   i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \nonumber \\
3   i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
4   i_{31} &= 0.33i_{22} \quad \text{quad} & i_{32} &= 0.15i_{32} \quad \text{quad} & i_{33} &= i_{11}
5 \end{alignat}

```

With the `alignat` environment one can easily align equations vertically at more than one marker:

$$abc = xxx =xxxxxxxxxxxx = aaaaaaaaaa \quad (\text{II-56})$$

$$ab = yyyyyyyyyyyyyy = yyyy = ab \quad (\text{II-57})$$

```

1 \begin{alignat}{3}
2   abc &= xxx &&=xxxxxxxxxxxx &&= aaaaaaaaaa \\
3   ab &= yyyyyyyyyyyyyy &&= yyyy &&= ab
4 \end{alignat}
```

- The `alignat` environment has an implicit {rlrl...rlrl} horizontal alignment with a vertical column alignment.
- A nonumber-version `\begin{alignat*}... \end{alignat*}` exists.
- Unnumbered single rows are possible with `\nonumber`.

25.3 *flalign* environment

This is the new replacement for the `xalignat` and `xxalignat` environments. It is nearly the same as the `xalignat` environment, only more “out spaced” and “left aligned”.

$$\begin{aligned} i_{11} &= 0.25 \\ i_{21} &= \frac{1}{3}i_{11} \\ i_{31} &= 0.33i_{22} \end{aligned} \quad (\text{II-58}) \quad (\text{II-59})$$

```

\begin{flalign}
i_{11} &= 0.25\nonumber \\
i_{21} &= \frac{1}{3}i_{11}\backslash \\
i_{31} &= 0.33i_{22}
\end{flalign}
```

```
\begin{flalign}
...
\end{flalign}
```

As seen, the equations are not really left aligned, when they have only one ampersand. In this case `flalign` has the same behaviour as the `align` environment.

When there are more than one tabbing characters (&), then the equations are really left aligned. This is also an easy way to get an equation with only one ampersand left aligned, see equation II-63 below.

$$i_{11} = 0.25$$

$$i_{12} = i_{21}$$

$$i_{13} = i_{23}$$

$$i_{21} = \frac{1}{3}i_{11}$$

$$i_{22} = 0.5i_{12}$$

$$i_{23} = i_{31} \quad (\text{II-60})$$

$$i_{31} = 0.33i_{22}$$

$$i_{32} = 0.15i_{31}$$

$$i_{33} = i_{11} \quad (\text{II-61})$$

The code looks like:

```

\begin{flalign}
i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \& \nonumber \\
i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
i_{31} &= 0.33i_{22} \& quad & i_{32} &= 0.15i_{31} \& quad & i_{33} &= i_{11}
\end{flalign}
```

This environment can be used to mix centered and left aligned equations without using the document wide valid option `fleqn`.

$$f(x) = \int \frac{1}{x^2} dx \quad (\text{II-62})$$

$$f(x) = \int \frac{1}{x^2} dx \quad (\text{II-63})$$

Equation II-63 is left aligned in fact of the second tabbing character `&`.

```

1 \begin{align}\label{eq:centered}
2   f(x) &= \int\frac{1}{x^2}, \mathbf{x}
3 \end{align}
4
5 \begin{flalign}\label{eq:leftaligned}
6   f(x) &= \int\frac{1}{x^2}, \mathbf{x} &
7 \end{flalign}
```

Another case is placing text left aligned, whereas the formulas should be right aligned.

$$\begin{aligned} 12(x - 1) + 20(y - 3) + 14(z - 2) &= 0 \\ \text{same as} \qquad \qquad \qquad 6x + 10y + 7z &= 0 \end{aligned}$$

```

1 \begin{flalign*}
2   && 12(x-1)+20(y-3)+14(z-2) &= 0 \\
3 \text{same as } && 6x+10y+7z &= 0
4 \end{flalign*}
```

25.4 *xalignat* environment

This is an obsolete macro but still supported by the *AMSmath* package.
Same as *alignat* environment, only a little more “out spaced”.

```
\begin{xalignat}
...
\end{xalignat}
```

$$i_{11} = 0.25 \qquad \qquad i_{12} = i_{21} \qquad \qquad i_{13} = i_{23}$$

$$i_{21} = \frac{1}{3}i_{11} \qquad \qquad i_{22} = 0.5i_{12} \qquad \qquad i_{23} = i_{31} \quad (\text{II-64})$$

$$i_{31} = 0.33i_{22} \qquad \qquad i_{32} = 0.15i_{32} \qquad \qquad i_{33} = i_{11} \quad (\text{II-65})$$

The same code looks like:

```

1 \begin{xalignat}{3}
2   i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \nonumber \\
3   i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
4   i_{31} &= 0.33i_{22} \quad \text{quad} & i_{32} &= 0.15i_{32} \quad \text{quad} & i_{33} &= i_{11}
5 \end{xalignat}
```

25.5 *xxalignat* environment

Like *xalignat* an obsolete macro but still supported by the *AMSmash* package. Same as *align* environment, only extremely “out spaced”, therefore no equation number!

$$\begin{array}{lll} i_{11} = 0.25 & i_{12} = i_{21} & i_{13} = i_{23} \\ i_{21} = \frac{1}{3} i_{11} & i_{22} = 0.5 i_{12} & i_{23} = i_{31} \\ i_{31} = 0.33 i_{22} & i_{32} = 0.15 i_{32} & i_{33} = i_{11} \end{array}$$

The same code looks like:

```
1 \begin{xxalignat}{3}
2   i_{11} & =0.25 & i_{12} & =i_{21} & i_{13} & =i_{23}\nonumber \\
3   i_{21} & =\frac{1}{3}i_{11} & i_{22} & =0.5i_{12}& i_{23} & =i_{31}\\
4   i_{31} & =0.33i_{22} & i_{32} & =0.15i_{32}& i_{33} & =i_{11}
5 \end{xxalignat}
```

25.6 *aligned* environment

In difference to the *split* environment (section 26.4 on page 62), the *aligned* environment allows more than one horizontal alignment but has also only one equation number:

$$\begin{aligned} 2x + 3 &= 7 & 2x + 3 - 3 &= 7 - 3 \\ 2x &= 4 & \frac{2x}{2} &= \frac{4}{2} \\ x &= 2 & & \end{aligned} \tag{II-66}$$

```
1 \begin{equation}
2 \begin{aligned}
3   2x+3 &= 7 & 2x+3-3 &= 7-3 \\
4   2x &= 4 & \frac{2x}{2} &= \frac{4}{2} \\
5   x &= 2 & &
6 \end{aligned}
7 \end{equation}
```

The *aligned* environment is similar to the *array* environment, there exists no starred version and it has only one equation number and has to be part of another math environment, which should be *equation* environment. The advantage of *aligned* is the much better horizontal and vertical spacing.

25.7 Problems

When using one of the *align* environments, there should be no `\\"` at the end of the last line, otherwise you'll get another equation number for this “empty” line:

$$2x + 3 = 7 \quad (\text{II-67})$$

(II-68)

```
1 \begin{align}
2   2x+3 &= 7 \\
3 \end{align}
```

$$2x + 3 = 7 \quad (\text{II-69})$$

```
1 \begin{align}
2   2x+3 &= 7 \\
3 \end{align}
```

26 Other environments

26.1 gather environment

This is like a multi line environment with no special horizontal alignment. All rows are centered and can have an own equation number:

```
\begin{gather}
...
\end{gather}
```

$$i_{11} = 0.25 \quad (\text{II-70})$$

$$i_{21} = \frac{1}{3} i_{11}$$

$$i_{31} = 0.33 i_{22} \quad (\text{II-71})$$

For this example the code looks like:

```
1 \begin{gather}
2   i_{11} = 0.25 \\
3   i_{21} = \frac{1}{3} i_{11} \nonumber \\
4   i_{31} = 0.33 i_{22} \\
5 \end{gather}
```

- The `gather` environment has an implicit `{c}` horizontal alignment with no vertical column alignment. It is just like an one column array/table.
- A nonumber-version `\begin{gather*}... \end{gather*}` exists. Look at section [26.4 on page 62](#) for an example.

26.2 gathered environment

The `gathered` environment is like the `aligned` or `alignat` environment. They use only so much horizontal space as the widest line needs. In difference to the `gather` environment it must be itself inside the math mode.

```
\begin{gathered}[c]
...
\end{gathered}
```

$$\begin{array}{c} i_{11} = 0.25 \\ \hline i_{21} = \frac{1}{3} i_{11} \\ \hline i_{31} = 0.33 i_{22} \end{array} \quad (\text{II-72})$$

```

1 \begin{align}
2 \rule{2cm}{1pt}
3 \begin{gathered}
4 \quad i_{11}=0.25 \\
5 \quad i_{21}=\frac{1}{3}i_{11} \\
6 \quad i_{31}=0.33i_{22}
7 \end{gathered}
8 \rule{2cm}{1pt}
9 \end{align}

```

The optional argument can be used for setting the vertical alignment which is by default c (centered). It can also be t for top or b for bottom.

$$\begin{array}{c} A = a \\ A = a \quad B = b \\ \hline A = a \quad B = b \quad C = c \quad \hline \\ B = b \quad C = c \\ C = c \end{array} \tag{II-73}$$

```

1 \begin{align}
2 \rule{1cm}{1pt}
3 \begin{gathered}[t]
4 \quad A=a \\
5 \quad B=b \\
6 \quad C=c
7 \end{gathered}
8 %
9 \begin{gathered}[c]
10 \quad A=a \\
11 \quad B=b \\
12 \quad C=c
13 \end{gathered}
14 %
15 \begin{gathered}[b]
16 \quad A=a \\
17 \quad B=b \\
18 \quad C=c
19 \end{gathered}
20 \rule{1cm}{1pt}
21 \end{align}

```

When using a square bracket as first character inside the environment, then everything is ignored by \mathcal{AM} \mathcal{S} until a following closing bracket, because \mathcal{AM} \mathcal{S} takes this as an optional argument:

$$\begin{array}{c} A = a \\ [B] \quad B = b \\ [C] \quad C = c \end{array} \tag{II-74}$$

```

1 \begin{align}
2 \begin{gathered}
3 [A]\quad A=a\\
4 [B]\quad B=b\\
5 [C]\quad C=c
6 \end{gathered}
7 \end{align}

```

The [A] is completely ignored, which can be avoided by using the optional argument [c] or at least an empty one directly after the `\begin{gathered}`. Another possibility is using the package `empheq`, which fixes this behaviour by default.

$$\begin{aligned} [A] \quad & A = a \\ [B] \quad & B = b \\ [C] \quad & C = c \end{aligned} \tag{II-75}$$

```

1 \begin{align}
2 \begin{gathered}[]
3 [A]\quad A=a\\
4 [B]\quad B=b\\
5 [C]\quad C=c
6 \end{gathered}
7 \end{align}

```

26.3 *multline* environment

This is also like a multi line¹⁹ environment with a special vertical alignment. The **first** row is **left aligned**, the second and all following ones except the last one are **centered** and the **last** line is **right aligned**. It is often used to write extremely long formulas:

```

1 \begin{multline}
2 \quad A = \lim _{n\rightarrow\infty} \Delta x \left( a^2 + \left( a^2 + 2a \Delta x \right. \right. \\
3 \quad \quad \quad \left. \left. + \left( \Delta x \right)^2 \right) \right) \Delta x + 2 \cdot \left( a^2 + 2a \Delta x \right) \Delta x + \dots \\
4 \quad \quad \quad + \left( a^2 + 2 \cdot 3a \Delta x + 3 \cdot \left( \Delta x \right)^2 \right) \Delta x + \ldots \\
5 \quad \quad \quad + \left( a^2 + 2 \cdot \left( n-1 \right) a \Delta x + \left( n-1 \right)^2 \Delta x \right) \Delta x \\
6 \quad \quad \quad = \frac{1}{3} \left( b^3 - a^3 \right)
7 \end{multline}

```

`\begin{multline}`
...
`\end{multline}`

¹⁹It is no typo, the name of the environment is `multline`, no missing i here!

$$\begin{aligned}
 A = \lim_{n \rightarrow \infty} \Delta x & \left(a^2 + \left(a^2 + 2a\Delta x + (\Delta x)^2 \right) \right. \\
 & + \left(a^2 + 2 \cdot 2a\Delta x + 2^2 (\Delta x)^2 \right) \\
 & + \left(a^2 + 2 \cdot 3a\Delta x + 3^2 (\Delta x)^2 \right) \\
 & + \dots \\
 & + \left(a^2 + 2 \cdot (n-1)a\Delta x + (n-1)^2 (\Delta x)^2 \right) \\
 & = \frac{1}{3} (b^3 - a^3) \quad (\text{II-76})
 \end{aligned}$$

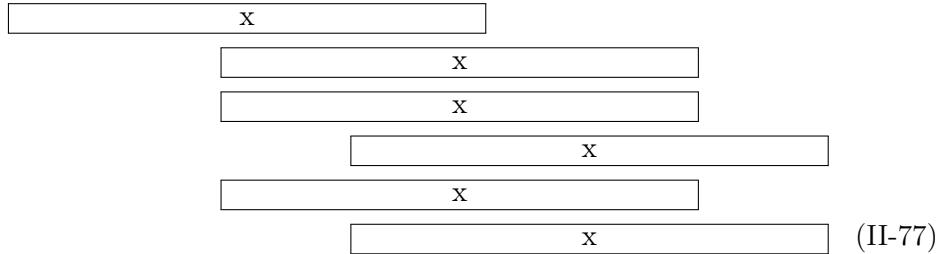


Figure 1: `multline` Alignment demo (the fourth row is shifted to the right with `\shoveright`)

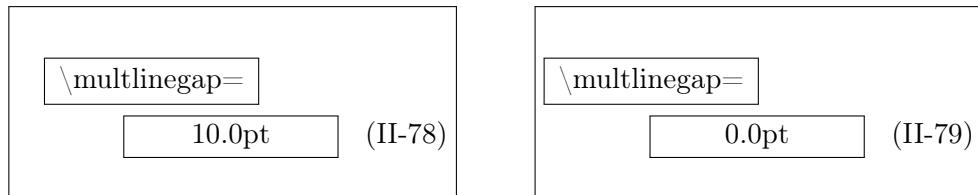


Figure 2: Demonstration of `\multlinegap` (default is 0pt)

- A nonumber-version `\begin{multline*} ... \end{multline*}` exists.
- By default only the last line (for right equation numbers) or the first line (for left equation numbers) gets a number, the others can't.
- The alignment of a single line can be changed with the command `\shoveright` (figure 1)
- The first line and the last line have a small gap to the text border.²⁰ See figure 2, where the length of `\multlinegap` is set to 0pt for the right one.

²⁰When the first (numbers left) or last line (numbers right) has an equation number then `\multlinegap` is not used for these ones, only for the line without a number.

26.3.1 Examples for *multiline*

With the *multiline* environment the equation 28 on page 28 looks like:

$$\frac{1}{2} \Delta(f_{ij} f^{ij}) = 2 \left(\sum_{i < j} \chi_{ij} (\sigma_i - \sigma_j)^2 + f^{ij} \nabla_j \nabla_i (\Delta f) + \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2 \nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (\text{II-80})$$

which is again a bad typesetting because of the two unequal parentheses. Each one has a size which is correct for the line but not for the whole formula. L^AT_EX accepts only pairs of parentheses for one line and has an “empty” parentheses, the dot “\left.” or “\right.” to get only one of the “pair”. There are different solutions to get the right size of the parentheses. One of them is to use the `\vphantom` command, which reserves the vertical space without any horizontal one, like a vertical rule without any thickness. The sum symbol from the first line is the biggest one and responsible for the height, so this one is the argument of `\vphantom` which has to be placed anywhere.

$$\frac{1}{2} \Delta(f_{ij} f^{ij}) = 2 \left(\sum_{i < j} \chi_{ij} (\sigma_i - \sigma_j)^2 + f^{ij} \nabla_j \nabla_i (\Delta f) + \nabla_k f_{ij} \nabla^k f^{ij} + f^{ij} f^k [2 \nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (\text{II-81})$$

```

1 \begin{multiline}
2 \frac{1}{2}\Delta(f_{ij}f^{ij})=
3 2\left(\sum_{i < j}\chi_{ij}(\sigma_i-\sigma_j)^2+f^{ij}\nabla_j\nabla_i(\Delta f)+\right.\newline
4 \left.\nabla_kf_{ij}\nabla^kf^{ij}+f^{ij}f^k[2\nabla_iR_{jk}-\nabla_kR_{ij}]\right)
5 \vphantom{\sum_{i < j}}
6 \end{multiline}

```

Instead of using the `\vphantom` command it is also possible to use fixed-width parentheses, which is described in section 8 on page 27.

A math expression with a very long fraction like the following one, which runs out of the margin could be written as a multiplication to avoid the fraction line.

$$\frac{dG_\infty}{dn} = \frac{[1 - e^{-pn}] [Q(n) - pR(n) + R'(n)] e^{-pn} - \left[-\frac{Q(n)e^{-pn}}{p} + \frac{Q(0)}{p} + R(n) e^{-pn} - A \right] p e^{-pn}}{(1 - e^{-pn})^2} = 0 \quad (\text{II-82})$$

```

1 \begin{equation}
2 \frac{\mathrm{d}G_{\infty}}{\mathrm{d}n} = \frac{1}{(1-e^{-pn})^2} \cdot \left\{ [1-e^{-pn}] [Q(n) - pR(n) + R'(n)] e^{-pn} \right.
3 \quad \left. - \left[ -\frac{Q(n)e^{-pn}}{p} + \frac{Q(0)}{p} + R(n)e^{-pn} - A \right] pe^{-pn} \right\} = 0
4
5 \end{equation}

```

With the `multiline` environment it can then be split into two or more parts:

$$\frac{\mathrm{d}G_{\infty}}{\mathrm{d}n} = \frac{1}{(1-e^{-pn})^2} \cdot \left\{ [1-e^{-pn}] [Q(n) - pR(n) + R'(n)] e^{-pn} - \left[-\frac{Q(n)e^{-pn}}{p} + \frac{Q(0)}{p} + R(n)e^{-pn} - A \right] pe^{-pn} \right\} = 0 \quad (\text{II-83})$$

```

1 \begin{multiline}
2 \frac{\mathrm{d}G_{\infty}}{\mathrm{d}n} = 
3 \quad \frac{1}{(1-e^{-pn})^2} \cdot \left\{ [1-e^{-pn}] [Q(n) - pR(n) + R'(n)] e^{-pn} \right.
4 \quad \left. - \left[ -\frac{Q(n)e^{-pn}}{p} + \frac{Q(0)}{p} + R(n)e^{-pn} - A \right] pe^{-pn} \right\} = 0
5
6 \end{multiline}

```

26.4 *split* environment

From now on the counting of the equations changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```

1 \makeatletter
2 \removetoken\@removefromreset{equation}{section}
3 \makeatother


```

```
\begin{split}
...
\end{split}
```

The `split` environment is like the `multiline` or `array` environment for equations longer than the column width. Just like the `array` environment and in contrast to `multiline`, `split` can only be used as **part of another environment**. `split` itself has no own numbering, this is given by the other environment. Without an ampersand all lines in the `split` environment are right-aligned and can be aligned at a special point by using an ampersand. In difference to the `aligned` environment (section 25.6 on page 56), the `split` environment permits more than one horizontal alignment.

It is important that the `split` environment has another behaviour when used inside one of the “old” L^AT_EX environments `\[...]` or `\begin{equation}`

. . . `\end{equation}`, in this case more than one horizontal alignment tabs are possible.

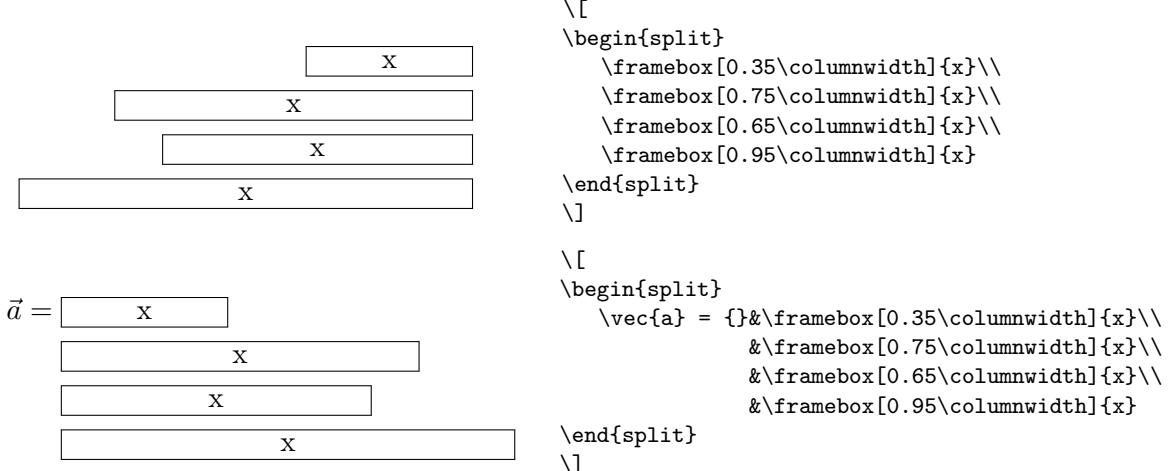

The following example shows the `split` environment as part of the `equation` environment:

$$\begin{aligned}
A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
&= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
&= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
&= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
&= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
\end{aligned} \tag{II-84}$$

```

1 \begin{equation}
2   \begin{split}
3     A_{\{1\}} &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
4     &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
5     &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
6     &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left( \frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
7     &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
8   \end{split}
9 \end{equation}

```

The same using the `array` environment with `{r1}`-alignment instead of `split` gives same horizontal alignment, but another vertical spacing²¹ and the symbols are only in scriptsize and not textsize:²²

$$\begin{aligned}
 A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
 &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
 &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
 \end{aligned} \tag{II-85}$$

Compare the following two examples for typesetting the minus sign. In the first case it is typeset similar to the plus character, and in the second example it is typeset without the additional space for a binary math atom.

$$\begin{aligned}
 a &= -b + c \\
 &\quad -d + e
 \end{aligned} \tag{II-86}$$

```

1 \begin{align}
2 \begin{split}
3 a &= {} & -b + c \\
4 && & -d + e
5 \end{split}
6 \end{align}
7 %
8 \begin{align}
9 \begin{split}
10 a &= {} & {-}b + c \\
11 && & {-}d + e
12 \end{split}
13 \end{align}

```

$$\begin{aligned}
 a &= -b + c \\
 &\quad -d + e
 \end{aligned} \tag{II-87}$$

- There exists no starred version (`\begin{split*}`) of the `split` environment.

26.5 cases environment

This gives support for an often used mathematical construct. You can also choose the more than once described way to convert some text into math, like

```
$x=\begin{cases}
0 & \text{\texttt{\& \text{if } A==...}} \\
1 & \text{\texttt{\& \text{if } B==...}} \\
x & \text{\texttt{\& \text{textrm{this runs with as much text as you like,}}} \\
& \text{\texttt{\quad but without an automatic linebreak, it runs out}}} \\
& \text{\texttt{\quad of page....}} \\
\end{cases}$
\end{cases}$
```

²¹Can be changed with `\renewcommand\arraystretch{1.5}`

²²See section 12 on page 38

which gives equation II-88. It is obvious what the problem is.

$$x = \begin{cases} 0 & \text{if } A=\dots \\ 1 & \text{if } B=\dots \\ x & \text{this runs with as much text as you like, but without a linebreak, it runs out of page....} \end{cases} \quad (\text{II-88})$$

In this case it is better to use a `parbox` for the text part with a `flushleft` command for a better view.

$$x = \begin{cases} 0 & \text{if } A=\dots \\ 1 & \text{if } B=\dots \\ x & \text{this runs with as much text as you like, but without an automatic linebreak, it runs out of page....} \end{cases} \quad (\text{II-89})$$

```

1 \begin{equation}
2 x=\begin{cases}
3   0 & \text{if } A=\dots \\
4   1 & \text{if } B=\dots \\
5   x & \text{\parbox{5cm}{\%} \\
6     \flushleft\% \\
7       this runs with as much text as you like, \\
8       but without an automatic linebreak, \\
9       it runs out of page....\%}
10 \end{cases}
11 \end{equation}
```

From now on the counting of the equations changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```
1 \renewcommand\theequation{\arabic{equation}}
```

26.6 Matrix environments

<code>\Vmatrix</code>	$\begin{Vmatrix} a & b \\ c & d \end{Vmatrix}$	<code>\Bmatrix</code>	$\begin{Bmatrix} a & b \\ c & d \end{Bmatrix}$	<code>\matrix</code>	$\begin{matrix} a & b \\ c & d \end{matrix}$
<code>\vmatrix</code>	$\begin{vmatrix} a & b \\ c & d \end{vmatrix}$	<code>\bmatrix</code>	$\begin{bmatrix} a & b \\ c & d \end{bmatrix}$	<code>\pmatrix</code>	$\begin{pmatrix} a & b \\ c & d \end{pmatrix}$

<code>\smallmatrix</code>	$\begin{smallmatrix} a & b \\ c & d \end{smallmatrix}$
---------------------------	--

Table 16: Matrix environments

All matrix environments can be nested and an element may also contain any other math environment, so that very complex structures are possible. By default all cells have a centered alignment, which is often not the best when having different decimal numbers or plus/minus values. Changing the alignment to right (not for the `smallmatrix`) is possible with

```

1 \makeatletter
2 \def\env@matrix{\hskip -\arraycolsep
3   \let\@ifnextchar\new@ifnextchar
4   \array{*\c@MaxMatrixCols r}}
5 \makeatother

```

```

matrix
vmatrix
Vmatrix
bmatrix
Bmatrix
pmatrix
smallmatrix

```

The special matrix environment `smallmatrix`, which decreases horizontal and vertical space is typeset in scriptstyle. The `smallmatrix` environment makes some sense in the inline mode to decrease the line height. For dots over several columns look for `\hdotsfor` in the following section.

27 Vertical whitespace

See section 11.5 on page 36 for the lengths which control the vertical whitespace. There is no difference to \mathcal{AMS} math.

28 Dots

In addition to section 13 on page 39 \mathcal{AMS} math has two more commands for dots: `\ddot{...}`²³ and `\dddot{...}`

```

\$ \ddot{y} \$: \ddot{y}
\$ \dddot{y} \$: \ddot{y}

```

Another interesting dot command is `\hdotsfor` with the syntax:

```

1 \hdotsfor [<spacing factor>]{<number of columns>}

```

With the spacing factor the width of the dots can be stretched or shrinked. The number of columns allows a continuing dotted line over more columns. Equation 90 shows the definition of a tridiagonal matrix.

²³already mentioned in section 14

$$A = \begin{bmatrix} a_{11} & a_{12} & 0 & \dots & \dots & \dots & 0 \\ a_{21} & a_{22} & a_{23} & 0 & \dots & \dots & 0 \\ 0 & a_{32} & a_{33} & a_{34} & 0 & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \dots & \dots & \dots & \dots & \dots & \dots & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \dots & 0 & a_{n-2,n-3} & a_{n-2,n-2} & a_{n-2,n-1} & 0 \\ 0 & \dots & \dots & 0 & q_{n-1,n-2} & a_{n-1,n-1} & a_{n-1,n} \\ 0 & \dots & \dots & \dots & 0 & a_{n,n-1} & a_{nn} \end{bmatrix} \quad (90)$$

```

1 \begin{equation}
2 \underline{A}=\left[\begin{array}{ccccccc}
3 a_{11} & a_{12} & 0 & \ldots & \ldots & \ldots & 0 \\
4 a_{21} & a_{22} & a_{23} & 0 & \ldots & \ldots & 0 \\
5 0 & a_{32} & a_{33} & a_{34} & 0 & \ldots & 0 \\
6 \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\
7 \dots & \dots & \dots & \dots & \dots & \dots & \dots \\
8 0 & \dots & 0 & a_{n-2,n-3} & a_{n-2,n-2} & a_{n-2,n-1} & 0 \\
9 0 & \dots & \dots & 0 & q_{n-1,n-2} & a_{n-1,n-1} & a_{n-1,n} \\
10 0 & \dots & \dots & \dots & 0 & a_{n,n-1} & a_{nn} \\
11 \end{array}\right]
12 \end{equation}
```

29 fraction commands

29.1 Standard

Additional to the font size problem described in subsection 2.2 on page 11 \mathcal{AMS} math supports some more commands for fractions. The `\frac` command described in [7], does no more exist in \mathcal{AMS} math.

- The global fraction definition has five parameters

```

1 \genfrac{\left\langle \right\rangle}{\left\langle \right\rangle}{\left\langle \right\rangle}{\left\langle \right\rangle}{\left\langle \right\rangle}
```

where thickness can have any length with a valid unit like
 $\genfrac{}{}{1pt}{}{}{x^2+x+1}{3x-2} \rightarrow \frac{x^2+x+1}{3x-2}$

- `\cfrac` (continued fraction) which is by default set in the display

mathstyle and useful for fractions like

$$\frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \quad (91)$$

which looks with the default `\frac` command like

$$\frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \quad (92)$$

where the mathstyle decreases for every new level in the fraction. The `\cfrac` command can be called with an optional parameter which defines the placing of the nominator, which can be [l]eft, [r]ight or [c]enter (the default - see equation 91):

$$\begin{array}{c} \frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \\ \qquad \qquad \qquad \frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \end{array}$$

- `\dfrac` which takes by default the displaystyle, so that fractions in inline mode $\frac{1}{2}$ have the same size than in display mode.
- `\tfrac` (vice versa to `\dfrac`) which takes by default the scriptstyle, so that fractions in display mode have the same size than in inline mode.

$$\begin{array}{ll} \frac{2}{3} & \text{\texttt{\tfrac{2}{3}}} \\ \frac{2}{3} & \text{\texttt{\frac{2}{3}}} \end{array}$$

29.2 Binoms

They are like fractions without a rule and its syntax is different to the `\choose` command from standard L^AT_EX (see section 2.2 on page 11). *\mathcal{MS}* provides three different commands for binoms just like the ones for fractions.

`\binom`
`\dbinom`
`\tbinom`

Command	Inlinemath	Displaymath
<code>\binom{m}{n}</code>	$\binom{m}{n}$	$\binom{m}{n}$
<code>\dbinom{m}{n}</code>	$\dbinom{m}{n}$	$\dbinom{m}{n}$
<code>\tbinom{m}{n}</code>	$\tbinom{m}{n}$	$\tbinom{m}{n}$

Table 17: binom commands

30 Roots

The typesetting for roots is sometimes not the best. Some solutions for better typesetting are described in section 7 on page 26 for standard L^AT_EX. $\sqrt[n]{a}$ $\sqrt[n]{a}$ $\sqrt[n]{a}$

`\leftroot`
`\uproot`

`1 [\sqrt [\leftroot { < number > } \uproot { < number > }] < root > { < . . . > }`

`<number>` indicates a value for the points²⁴ of which the root can be adjusted to the left and/or to the top, e.g., $\sqrt[n]{a}$ ($\sqrt[n]{a}$) has a too deep exponent, whereas $\sqrt[n]{a}$ ($\sqrt[n]{a}$) looks nicer.

30.1 Roots with `\smash` command

The default for a root with λ_{k_i} as root argument looks like $\sqrt{\lambda_{k_i}}$, which may be not the best typesetting. It is possible to reduce the lowest point of the root to the baseline with the `\smash` command: $\sqrt{\lambda_{k_i}} \xrightarrow{\text{with } \text{\smash}} \sqrt{\lambda_{k_i}}$

`\smash`

The syntax of the `\smash` command²⁵ renewed by the *AMSmash* package is

`1 [\smash [< position >] { < argument > }`

The optional argument for the position can be:

t keeps the bottom and annihilates the top

b keeps the top and annihilates the bottom

tb annihilates top and bottom (the default)

31 Accents

With the macro `\mathaccent` it is easy to define new accent types, for example

`1 [\def \dotcup { \$ \mathaccent \cdot \cup \$ }`

²⁴In PostScript units (bp – Big Points).

²⁵In `latex.ltx` `\smash` is defined without an optional argument.

⊕

Overwriting of two symbols is also possible:



In this case the second symbol has to be shifted to the left for a length of $5mu$ (mu: math unit).

```

1 \def\curvearrowleftright{%
2   \ensuremath{%
3     \mathaccent\curvearrowright{\mkern-5mu\curvearrowleft
4   }%
5 }

```

For other possibilities to define new accents see section [47.1 on page 97](#).

32 \mod command

In standard L^AT_EX the modulo command is not an operator, though it is often used in formulas. *AMSmath* provides two (three) different commands for modulo, which are listed in tabular 18.

- They all insert some useful space before and behind the mod-operator.

$$\begin{array}{ll} a \backslash \text{mod}\{n^2\} = b & \rightarrow a \text{ mod } n^2 = b \\ a \backslash \text{pmod}\{n^2\} = b & \rightarrow a \text{ (mod } n^2) = b \\ a \backslash \text{pod}\{n^2\} = b & \rightarrow a \text{ } (n^2) = b \end{array}$$

Table 18: The modulo commands and their meaning

33 Equation numbering

See section [3.3 on page 16](#) for equation numbering. It is mostly the same, only one command is new to *AMSmath*. If you want a numbering like “44” then write either in the preamble or like this example anywhere in your doc:

```

1 \numberwithin{equation}{section}

```

| From now on the numbering looks like equation [44 on page 52](#). For the book-class you can get the same for chapters.

If you want to get rid of the parentheses then write in the preamble:

```

1 \makeatletter
2 \def\tagform@#1{\maketag@@@{\ignorespaces#1\unskip\
3 @italiccorr}}

```

Now the following four subequation numbers have no parentheses.

33.1 Subequations

Amsmath supports this with the environment `subequation`. For example:

$y = d$	33.93a
$y = cx + d$	33.93b
$y = bx^2 + cx + d$	33.93c
$y = ax^3 + bx^2 + cx + d$	33.93d

```

1 \begin{subequations}
2 \begin{align}
3 y &= d \\
4 y &= cx+d \\
5 y &= bx^{2}+cx+d \\
6 y &= ax^{3}+bx^{2}+cx+d
7 \end{align}
8 \end{subequations}
```

Inside of subequations only complete other environments (`\begin{...}` ... `\end{...}`) are possible.

```

1 \renewcommand{\theequation}{%
2   \theparentequation{}-\arabic{equation}}
3 }
```

$y = d$	(33.94-1)
$y = cx + d$	(33.94-2)
$y = bx^2 + cx + d$	(33.94-3)
$y = ax^3 + bx^2 + cx + d$	(33.94-4)

A ref to a subequation is possible like the one to equation 33.94-2. The environment chooses the same counter “`equation`” but saves the old value into “`parentequation`”.

It is also possible to place two equations side by side with counting as subfigures:

$$y = f(x) \quad (33.95a) \quad y = f(z) \quad (33.95b)$$

In this case, the *AMS*math internal subfigure counter cannot be used and an own counter has to be defined:

```

1 \newcounter{mySubCounter}
2 \newcommand{\twocoleqn}[2]{%
3   \setcounter{mySubCounter}{0}%
4   \let\OldTheEquation\theequation%
5   \renewcommand{\theequation}{\OldTheEquation\alph{%
6     mySubCounter}}%
    \noindent%
```

```

7  \begin{minipage}{.49\textwidth}
8    \begin{equation}\refstepcounter{mySubCounter}
9      #1
10     \end{equation}
11   \end{minipage}\hfill%
12   \addtocounter{equation}{-1}%
13   \begin{minipage}{.49\textwidth}
14     \begin{equation}\refstepcounter{mySubCounter}
15       #2
16     \end{equation}
17   \end{minipage}%
18   \let\theequation\OldTheEquation
19 }
20 [ ... ]
21 \twocoleqn{y=f(x)}{y=f(z)}

```

34 Labels and tags

For the `\label` command see section 3.4 on page 18, it is just the same behaviour. *AMSmath* allows to define own single “equation numbers” with the `\tag` command.

$$\begin{aligned} f(x) &= a && \text{(linear)} \\ g(x) &= dx^2 + cx + b && \text{(quadratic)} \\ h(x) &= \sin x && \text{trigonometric} \end{aligned}$$

```

1 \begin{align}
2 f(x) &= a\tag{linear}\label{eq:linear}\\
3 g(x) &= ,\mathbf{m}x^2+cx+b\tag{quadratic}\label{eq:quadratic}\\
4 h(x) &= \sin x\tag{trigonometric}\label{eq:trigonometric}
5 \end{align}

```

- The `\tag` command is also possible for unnumbered equations, L^AT_EX changes the behaviour when a tag is detected.
- There exists a starred version `\tag{*}{...}`, which suppresses any annotations like parentheses for equation numbers.
- There exist two package options for tags, `ctagsplit` and `righttag` (look at the beginning of this part on page 50).

35 Limits

By default the sum/prod has the limits above/below and the integral at the side. To get the same behaviour for all symbols which can have limits load the package *AMSmath* in the preamble as

```
1 \usepackage [sumlimits,intlimits]{amsmath}
```

There exist also options for the vice versa (see page 50). See also Section 41 for the additional commands `\underset` and `\overset`.

35.1 Multiple limits

For general information about limits read section 2.1 on page 11. Standard L^AT_EX provides the `\atop` command for multiple limits (section 6.1 on page 25). $\mathcal{AM}\mathcal{S}$ math has an additional command for that, which can have several lines with the following syntax:

```
1 \substack{...\\...\\...}
```

The environments described in [7]

```
1 \begin{Sb} ... \end{Sb}
2 \begin{Sp} ... \end{Sp}
```

```
\substack
\begin{Sb}
...
\end{Sb}
\begin{Sp}
...
\end{Sp}
```

are obsolete and no more part of $\mathcal{AM}\mathcal{S}$ math.

The example equation 21 on page 25 with the `\substack` command looks like:

$$\sum_{\substack{1 \leq i \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (35.1)$$

Insert these limits in the following way:

```
1 \begin{equation}
2   \sum_%
3     \substack{1 \leq i \leq p \\
4       1 \leq j \leq q \\
5         1 \leq k \leq r}
6   }%
7   a_{ij} b_{jk} c_{ki}
8 \end{equation}
```

35.2 Problems

There are still some problems with limits and the following math expression. For example:

$$X = \sum_{1 \leq i \leq j \leq n} X_{ij}$$

```
1 [
2 X = \sum_{1 \leq i \leq j \leq n} X_{ij}
3 ]
```

does not look nice because of the long limit. Using a `\makebox` also does not really solve the problem, because `\makebox` is in TeX horizontal mode and knows nothing about the appropriate math font size, because limits have a smaller font size. It is better to define a `\mathclap` macro, similar to the two macros `\llap` and `\rlap` and uses the also new defined `\mathclap` macro:

```

1 \def\mathllap{\mathpalette\mathllapinternal}
2 \def\mathllapinternal#1#2{%
3   \llap{$\mathsurround=0pt#1#2$}%
4 }
5 \def\clap#1{\hbox{ to \Opt{\hss#1\hss}}}
6 \def\mathclap{\mathpalette\mathclapinternal}
7 \def\mathclapinternal#1#2{%
8   \clap{$\mathsurround=0pt#1#2$}%
9 }
10 \def\mathrlap{\mathpalette\mathrlapinternal}
11 \def\mathrlapinternal#1#2{%
12   \rlap{$\mathsurround=0pt#1#2$}%
13 }
```

Now we can write limits which have a boxwidth of 0pt and the right font size and the following math expression appears just behind the symbol:

$$X = \sum_{1 \leq i \leq j \leq n} X_{ij}$$

```

1 \[
2 X = \sum_{\mathclap{1 \leq i \leq j \leq n}} X_{ij}
3 \]
```

Another problem occurs when having operators with stacked limits in braces:

$$\left[\sum_{\substack{i,j \\ i>j}} \dots \right] \quad (35.2)$$

This case is not easy to handle when some other math expressions are around the braces which should be on the same baseline. However, the following may help in some cases to get better looking braces.

$$foo \left[\sum_{\substack{i,j \\ i>j}} \dots \right] bar \quad (35.3)$$

```

1 \begin{aligned}
2 foo \left[ \begin{array}{@{}c@{}} \right. \sum_{\substack{i,j \\ i>j}} \dots \left. \begin{array}{@{}c@{}} \end{array} \right]
3 \end{aligned}
```

35.3 \sideset

This is a command for a very special purpose, to combine over/under limits with superscript/subscripts for the sum-symbol. For example: it is not `\sideset`

possible to place the prime for the equation 35.4 near to the sum symbol, because it becomes an upper limit when writing without an preceding {}.

$$\sum_{\substack{n < k \\ n \text{ odd}}} 'nE_n \quad (35.4)$$

The command `\sideset` has the syntax

```
1 \sideset{<before>}{<behind>}
```

It can place characters on all four corners of the sum-symbol:

$$\begin{matrix} UpperLeft & & UpperRight \\ & \sum_{LowerLeft}^T & \\ LowerLeft & & LowerRight \\ & B & \end{matrix}$$

```
1 \[
2 \sideset{_{LowerLeft}}^{UpperLeft}{_ {LowerRight}}^{UpperRight}
3 \} \sum_B^T
4 \]
```

Now it is possible to write the equation 35.4 in a proper way with the command `\sideset{}{'}{}` before the sum symbol:

$$\sum_{\substack{n < k \\ n \text{ odd}}} 'nE_n \quad (35.5)$$

36 Operator names

By default variables are written in italic and operator names in upright mode, like $y = \sin(x)$.²⁶ This happens only for the known operator names, but creating a new one is very easy with:

```
1 \newcommand{\mysin}{\operatorname{mysin}}
```

Now `\mysin` is also written in upright mode $y = \text{mysin}(x)$ and with some additional space before and behind.

It is obvious, that only those names can be defined as new operator names which are not commands in another way. Instead of using the new definition as an operator, it is also possible to use the text mode. But it is better to have all operators of the same type, so that changing the style will have an effect for all operators.

The new defined operator names cannot have limits, only superscript/subscript is possible. `amsopn.sty` has an additional command `\operatorname{withlimits}`, which supports over/under limits like the one from `\int` or `\sum`.

²⁶See section 16 on page 43, where all the standard L^AT_EX known operator names are listed. Package `AMSmath` has some more (see documentation).

It is also possible to use the macro `\mathop` to declare anything as operator, like

$_1B$

```
1 \[ \sideset{_1}{}{\mathop{\mathrm{B}}}\ ]
```

With this definition it is possible to use `\sideset` for a forgoing index, which is only possible for an operator.

For a real L^AT_EX definition have a look at section [16 on page 43](#).

37 Text in math mode

If you need complex structures between formulas, look also at section [65](#).

37.1 `\text` command

This is the equivalent command to `\mathrm` or `\mbox` from the standard L^AT_EX (section [9 on page 31](#)) with the exception, that `\mathrm` always uses the roman font and `\text` the actual one and that the font size is different when used in super- and subscript.

```
\text
\mbox
\textnormal
\mathrm
```

For example: $f(x) = x$ this was math.

$A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$

```
1 $\boxed{\$\\boxed{f(x)=x\\quad\\text{this was } \\math{}}\$}$
2
3 {\sffamily\huge
4 $A^{\\mbox{text}}_{\\mbox{text}}$\\quad
5 $A^{\\text{text}}_{\\text{text}}$\\quad
6 $A^{\\textnormal{text}}_{\\textnormal{text}}$\\quad
7 $A^{\\mathrm{text}}_{\\mathrm{text}}$}
8 }
```

The `\text` macro can be used at any place and can be in some cases a better solution as `\intertext` (see section [37.2](#)).

$$12(x - 1) + 20(y - 3) + 14(z - 2) = 0$$

and

$$6x + 10y + 7z = 0$$

$$12(x - 1) + 20(y - 3) + 14(z - 2) = 0 \tag{37.1}$$

$$\text{and} \qquad \qquad \qquad 6x + 10y + 7z = 0 \tag{37.2}$$

```

1 \begin{flalign*}
2 && 12(x-1) + 20(y-3) + 14(z-2) &= 0 && \\
3 \text{and} && 6x + 10y + 7z &= 0 && \\
4 \end{flalign*}
5
6 \begin{align}
7 && 12(x-1) + 20(y-3) + 14(z-2) &= 0 \\
8 \text{and} && 6x + 10y + 7z &= 0 \\
9 \end{align}

```

37.2 \intertext command

This is useful when you want to place some text between two parts of math stuff without leaving the math mode, like the name “`\intertext`” says. For example we write the equation II-84 on page 63 with an additional command after the second line.

$$\begin{aligned} A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\ &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \end{aligned}$$

Now the limits of the integrals are used

$$\begin{aligned} &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\ &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\ &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE} \end{aligned}$$

The code looks like:

```

1 \begin{equation}
2 \begin{split}
3 A_{\{1\}} &= \left| \int \_{0}^{\{1\}} (f(x)-g(x)) \, dx \right| + \left| \int \_{\{1\}}^2 (g(x)-h(x)) \, dx \right| \\
4 &= \left| \int \_{0}^{\{1\}} (x^{\{2\}}-3x) \, dx \right| + \left| \int \_{\{1\}}^2 (x^{\{2\}}-5x+6) \, dx \right| \\
5 \intertext{Now the limits of the integrals are used}
6 &= \left| \frac{x^{\{3\}}}{3} - \frac{3}{2}x^{\{2\}} \right|_{\{0\}}^{\{1\}} + \left| \frac{x^{\{3\}}}{3} - \frac{5}{2}x^{\{2\}} + 6x \right|_{\{1\}}^2 \\
7 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left( \frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
8 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
\end{split}

```

```

9      \left( \frac{1}{3} - \frac{5}{2} + 6 \right) \right| \ \\
10     & = \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| \\
11     \right| = \frac{7}{6} + \\
12     \frac{5}{6} = 2, \text{textrm{FE}} \\
13 \end{split}
\end{equation}

```

Writing very long text is possible by using a `parbox`, see section 9 on page 31 for an example with `\textrm`, which behaves in the same way as `\text`.

38 Extensible arrows

To write something like $\xrightarrow[\text{below}]{\text{above the arrow}}$ you can use the following macro

`\xrightarrow`
`\xleftarrow`
`\xmapsto`

`$\xrightarrow[\text{below}]{\text{above the arrow}}$`

and the same with `\xleftarrow`. You can define your own extensible arrow macros if you need other than these two predefined ones. To get a doublelined extensible arrow like `\Longleftrightarrow` but with the same behaviour as an extensible one, write in the preamble

```

1 \newcommand{\xLongLeftRightArrow}[2][]{%
2   \ext@arrow 0055{\LongLeftRightArrowfill@}{#1}{#2}}
3 \def\LongLeftRightArrowfill@{%
4   \arrowfill@\Leftarrow\Relbar\Rightarrow}
5 \newcommand{\xlongleftrightarrow}[2][]{%
6   \ext@arrow 0055{\longleftrightarrowfill@}{#1}{#2}}
7 \def\longleftrightarrowfill@{%
8   \arrowfill@\leftarrow\relbar\rightarrow}

```

The three parts `\Leftarrow\Relbar\Rightarrow` define left|middle|right of the arrow, where the middle part would be stretched in a way that the arrow is at least as long as the text above and/or below it. This macro has one optional and one standard parameter. The optional one is written below and the standard one above this arrow. Now we can write


`$\xLongLeftRightArrow[\text{below}]{\text{above the arrow}}$`
`$\xlongleftrightarrow[\text{below}]{\text{above the arrow}}$`

to get $\xleftarrow[\text{below}]{\text{above the arrow}}$ or $\xrightarrow[\text{below}]{\text{above the arrow}}$. The “number” 0055 after `\ext@arrow` defines the position relative to the extended arrow and is not a number but four parameters for additional space in the math unit `mu`.

```

1 \def\mapstofill@{%
2   \arrowfill@\mapstochar\relbar\relbar\rightarrow}
3 \newcommand*\xmapsto[2][]{%
4   \ext@arrow <four digits>\mapstofill@{#1}{#2}}

```

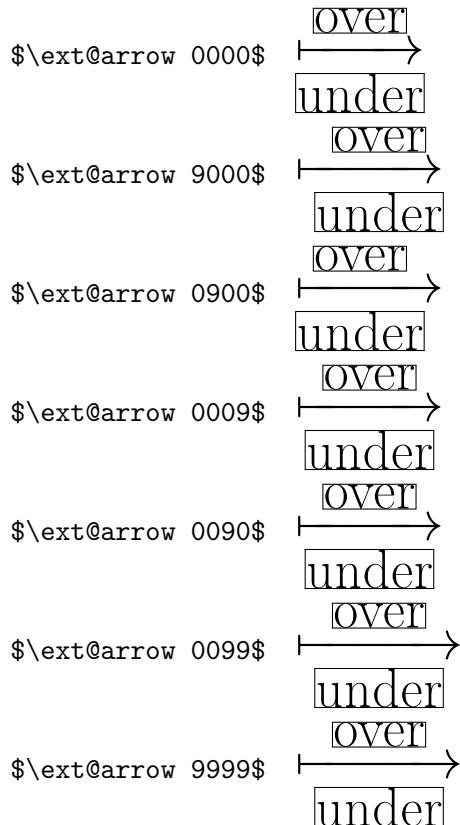

- 1st digit: space left
- 2nd digit: space right
- 3rd digit: space left and right
- 4th digit: space relativ to the tip of the “arrow”

The two macros `\xrightarrow` and `\xleftarrow` are defined as:

```

1 \newcommand{\xrightarrow}[2][]{\ext@arrow 0359\rightarrowfill@{#1}{#2}}
2 \newcommand{\xleftarrow}[2][]{\ext@arrow 3095\leftarrowfill@{#1}{#2}}

```

39 Frames

AMSmath knows the macro `\boxed` which can be used for inline $a \boxed{b + c}$ and displayed math expressions:

$$f(x) = \int_1^\infty \frac{1}{x^2} dt = 1 \quad (39.1)$$

```

1 \begin{align}
2 \boxed{f(x)=\int_1^{\infty}\frac{1}{x^2}, dt=1}
3 \end{align}

```

For coloured boxes use package `empheq`. For an example see section 47.11 on page 105.

40 Greek letters

The *AMSmash* package simulates a bold font for the greek letters by writing a greek character twice with a small kerning. This is done with the macro `\pmb{<letter>}`. The `\mathbf{<character>}` doesn't work with lower greek character. However, using the `\boldsymbol` macro from *AMSmash* is the better way when the font has a bold symbol.

`\pmb`
`\boldsymbol`

Uppercase greek letters are by default in upright mode. *AMSmash* supports also such letters in italic mode with a preceeding `var` e.g., `\varGamma`

letter	<code>\pmb{letter}</code>	<code>\boldsymbol{letter}</code>	letter	italic
α	α	α	Γ	Γ
β	β	β	Δ	Δ
γ	γ	γ	Θ	Θ
δ	δ	δ	Λ	Λ
ϵ	ϵ	ϵ	Ξ	Ξ
ε	ε	ε	Π	Π
ζ	ζ	ζ	Σ	Σ
η	η	η	Υ	Υ
θ	θ	θ	Φ	Φ
ϑ	ϑ	ϑ	Ψ	Ψ
ι	ι	ι	Ω	Ω
...		

41 Miscellaneous commands

There are several commands which can be used in math mode:

Some examples are shown in table 19.

`\overset`
`\underset`

<code>\$\underset{under}{\overbrace{baseline}}\$</code>	<i>baseline</i> <i>under</i>
<code>\$\overset{over}{\underbrace{baseline}}\$</code>	<i>over</i> <i>baseline</i>
<code>\boldsymbol{\Omega}</code>	Ω

Table 19: Different mathcommands

`\underset` is a useful macro for having limits under non-operators (see page 98). `\boldsymbol` can be used for a math symbol that remains unaffected by `\mathbf` if the current math font set includes a bold version of that symbol.

42 Problems with amsmath

\mathcal{AM} Smath is an excellent package with some “funny features”. When using an `align` environment inside a `gather` environment, it should be centered just like the other lines. This is only true, when there is a number/tag or an additional ampersand:

$$\begin{aligned} m_2 &= m'_2 + m''_2 \\ &= \frac{V'_2}{v'_2} + \frac{V''_2}{v''_2} \\ \Rightarrow m_2 v'_2 &= V - V''_2 + V''_2 \frac{v'_2}{v''_2} \end{aligned}$$

$$\begin{aligned} m_2 &= m'_2 + m''_2 \\ &= \frac{V'_2}{v'_2} + \frac{V''_2}{v''_2} \\ \Rightarrow m_2 v'_2 &= V - V''_2 + V''_2 \frac{v'_2}{v''_2} \end{aligned}$$

```

1 \begin{gather*}
2   \begin{align*}
3     m_2 &= m_2' + m_2'' \\
4     &\quad \&= \frac{V_2'}{v_2'} + \frac{V_2''}{v_2''} \\
5   \end{align*} \\
6   \Rightarrow m_2 v_2' = V - V_2'' + V_2'' \frac{v_2'}{v_2''}
7 \end{gather*}
8 \begin{gather*}
9   \begin{align*}
10    m_2 &= m_2' + m_2'' \\
11    &\quad \&= \frac{V_2'}{v_2'} + \frac{V_2''}{v_2''} \& \% <<<=====
12   \end{align*} \\
13   \Rightarrow m_2 v_2' = V - V_2'' + V_2'' \frac{v_2'}{v_2''}
14 \end{gather*}

```

This effect depends to the horizontal width, which is wrong in the first example, in fact of a missing tag or number the right whitespace is cut, but

the left one is still there. The additional ampersand prevents $\mathcal{AM}\mathcal{S}$ math to change the right margin.

Another kind of curiosities is the following example, which depends to the same problem of cutting whitespace only on one side.

$$a = b$$

$$c = d$$

$$a = b$$

$$c = d$$

```

1 \bigskip\noindent\fbox{%
2 \begin{minipage}{10cm}
3 \begin{align*}
4   a&=b \\ c&=d
5 \end{align*}
6 \end{minipage}}
7
8 \noindent\fbox{%
9 \begin{minipage}{10cm}
10 \noindent\begin{align*}
11   a&=b \\ c&=d
12 \end{align*}
13 \end{minipage}}

```

Part III

TeX and math

There is in general no need to use the TeX macros, because the ones defined with L^AT_EX or with *AMS*math are much more useful. Nevertheless there may be situations, where someone has to use one of the TeX macros or special TeX math length. One can not expect, that all macros work in the usual way, a lot of them are redefined by L^AT_EX or *AMS*math. On the other hand some of these basic macros or length definitions are used in the TeX way, so it might be interesting to have all declared in a short way for some information.

43 Length registers

43.1 \abovedisplayshortskip

A length with glue, see section 11.5.1 for an example.

43.2 \abovedisplayskip

A length with glue, see section 11.5.1 for an example.

43.3 \belowdisplayshortskip

A length with glue, see section 11.5.1 for an example.

43.4 \belowdisplayskip

A length with glue, see section 11.5.1 for an example.

43.5 \delimiterfactor

The height of a delimiter is often not optimally calculated by TeX. In some cases it is too short. With \delimiterfactor one can correct this height. The delimiterheight is < calculated height > · < #1 > /1000 where #1 is the parameter of \delimiterfactor. The default value is 901.

$$y = \begin{cases} x^2 + 2x & \text{if } x < 0, \\ x^3 & \text{if } 0 \leq x < 1, \\ x^2 + x & \text{if } 1 \leq x < 2, \\ x^3 - x^2 & \text{if } 2 \leq x. \end{cases}$$

```

1 \[
2 y = \left\{ \begin{array}{ll}
3 \begin{array}{l}
4 \text{if } x < 0, \\
5 \text{if } 0 \leq x < 1, \\
6 \text{if } 1 \leq x < 2, \\
7 \text{if } 2 \leq x. \\
8 \end{array} \\
9 \right. \\
10 \right]

```

$$y = \begin{cases} x^2 + 2x & \text{if } x < 0, \\ x^3 & \text{if } 0 \leq x < 1, \\ x^2 + x & \text{if } 1 \leq x < 2, \\ x^3 - x^2 & \text{if } 2 \leq x. \end{cases}$$

```

1 \[
2 \delimiterfactor=1500
3 y = \left\{ \begin{array}{ll}
4 \quad x^2+2x & \text{if } x<0, \\
5 \quad x^3 & \text{if } 0\leq x<1, \\
6 \quad x^2+x & \text{if } 1\leq x<2, \\
7 \quad x^3-x^2 & \text{if } 2\leq x. \\
8 \end{array} \right.
9 \right.
10 \right.
11 \right]

```

43.6 \delimitershortfall

Additionally to the forgoing `\delimiterfactor` one can modify the height of the delimiter with another value. TeX makes the delimiter larger than the values of `< calculated height > · < delimiterfactor > /1000` and `< calculated height > – < delimitershortfall >`. This makes it possible to always get different heights of a sequence of delimiters.

$x \cdot ((x^2 - y^2) - 3)$	<pre> 1 \$x\cdot\left(\left(x^2-y^2\right)-3\right)\$\\[7pt] 2 3 \$ 4 \delimitershortfall-1pt 5 x\cdot\left(\left(x^2-y^2\right)-3\right)\$ </pre>
$((A))$	<pre> 1 \$\left(\left(\left(A\right)\right)\right)\$\\[7pt] 2 3 \$ 4 \left(\left(\left(A\right)\right)\right)\$ </pre>

43.7 \displayindent

This is the left shift amount of a line holding displayed equation. By default it is `0pt` but gets the value of an indented paragraph when there is an environment like the quotation one.

The following formula is typeset in the usual way without modifying anything.

$$f(x) = \int \frac{\sin x}{x} dx$$

Now we start a quotation environment which sets `\labelwidth` to new values for a greater left margin.

- The following formula is typeset in the usual way without modifying anything.

$$f(x) = \int \frac{\sin x}{x} dx$$

- Now we write the same equation, but now with modifying displayindent, it is set to the negative \leftskip:

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \[
2   \displayindent=-\leftskip
3   f(x) = \int \frac{\sin x}{x}, \mathbf{d} x
4 \]

```

43.8 \displaywidth

The width of the line holding a displayed equation, which is by default \ linewidth. In the second example the formula is centered for a display width of 0.5\ linewidth.

$$f(x) = \int \frac{\sin x}{x} dx$$

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \[ f(x) = \int \frac{\sin x}{x}, \mathbf{d} x \]
2 \[
3   \displaywidth=0.5\ linewidth
4   f(x) = \int \frac{\sin x}{x}, \mathbf{d} x
5 \]

```

43.9 \mathsurround

Extra space added when switching in and out of the inline math mode (see section 2.7).

43.10 \medmuskip

See section 11.1 for an example.

43.11 \mkern

Similiar to \kern, but adds a math kern item to the current math list. Length must be a math unit.

43.12 \mskip

Similiar to \skip, but adds math glue to the current math list. Length must be a math unit.

43.13 \muskip

Assigns a length with a math unit to one of the 256 \muskip register.

43.14 \muskipdef

Defines a symbolic name for a \muskip register.

43.15 \nonscript

Ignores immediately following glue or kern in script and scriptscript styles, which makes a redefinition of \mathchoice superfluous.

43.16 \nulldelimiterspace

This is the width of a null or missing delimiter, e.g., \right. or for the left one.

43.17 \predisplaysize

Is the effective width of the line preceding a displayed equation, whether \abovedisplayskip or \abovedisplayshortskip is used for the vertical skip.

43.18 \scriptspace

The space inserted after an exponent or index, predefined as \scriptspace=0.5pt

43.19 \thickmuskip

See section 11.1.

43.20 \thinmuskip

The short version for positive skip is defined as \def\,\{\mskip\thinmuskip} and the one for a negative skip as \def\!{\mskip-\thinmuskip} (see also Section 11.1).

$$\begin{aligned} & \sqrt{2x} - \sqrt{2}x \\ & \sqrt{\log x} - \sqrt{\log x} \\ & P(1/\sqrt{n}) - P(1/\sqrt{n}) \\ & [0, 1) - [0, 1) \\ & x^2/2 - x^2/2 \end{aligned}$$

```

1 $\sqrt{2 x$ -- $\sqrt{2\,,x$\}\\
2 $\sqrt{\log x}$ -- $\sqrt{\,,\log x}$\\
3 $P\left({1/\sqrt{n}}\right)$ -- $P\left({1/\sqrt{n}},\right)$\\
4 $[0,1)$ -- $[0,1)$\\
5 $x^2/2$ -- $x^2!/2$\\\

```

$$\int \int_D dx dy \quad \int \int_D dx dy$$

$$\int \int_D dx dy \quad \int \int_D dx dy$$

$$\int \int_D dx dy \quad \int \int_D dx dy$$

$$\int \int_D dx dy$$

```

1 \int\int_D \mathrm{d}x\mathrm{d}y \quad \int\int_D \mathrm{d}x\mathrm{d}y \quad
2 \int\!\!\int_D \mathrm{d}x\mathrm{d}y \quad \int\!\!\int_D \mathrm{d}x\mathrm{d}y \quad
3 \int\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad \int\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad
4 \int\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad \int\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad
5 \int\!\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad \int\!\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad
6 \int\!\!\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad \int\!\!\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y \quad
7 \int\!\!\!\!\!\!\!\int_D \mathrm{d}x\mathrm{d}y

```

43.21 \medmuskip

See section 11.1.

44 Math font macros

44.1 \delcode

Each character has not only a \catcode and \mathcode but also a \delcode which defines for a single character how it should look when used as a math delimiter.

44.2 \delimiter

Every character can be declared as a delimiter, but TeX must know which characters should be used for the default and the big size. For L^AT_EX the macro \DeclareMathDelimiter should be used (see section 8.2 on page 30).

In the following example \tdela is the character 0x22 (\uparrow) from font number 2 (csmy) and character 0x78 from font number 3 (cmex) for the big version. \tdelb is the same vice versa (\downarrow).

$$\uparrow x - y \downarrow (x + y) = x^2 - y^2$$

$$\uparrow \sum_{n=0}^{\infty} \frac{1}{2^n} \downarrow^2 = 4$$

$$\left| \sum_{n=0}^{\infty} \frac{1}{2^n} \right|^2 = 4$$

```

1 \def\tdela{\delimeter"4222378\relax}
2 \def\tdelb{\delimeter"5223379\relax}
3
4 $\tdela x-y\tdelb(x+y)=x^2-y^2$ 
5
6 [\tdela\sum_{n=0}^{\infty}\frac{1}{2^n}\tdelb
7 ^2 = 4]
8 [\left\tdela\sum_{n=0}^{\infty}\frac{1}{2^n}\right\tdelb^2 = 4]

```

44.3 \displaystyle

See section 12 for an example.

44.4 \fam

When TeX switches into the math mode, it typesets everything using one of the 16 possible families of fonts. \fam is an internal register where other macros can check which font is the actual one. At the beginning TeX starts with \fam=-1.

\fam=-1	$123abcABC\alpha\beta\gamma$
\fam=0	$123abcABCffffl$
\fam=1	$123abcABC\alpha\beta\gamma$
\fam=2	$\infty\in\exists\exists\forall\forall\mathcal{A}\mathcal{B}\mathcal{C}\circ\circ\circ$
\fam=3	$\int\prod\coprod\sum\langle\rangle^{\wedge\wedge}$
\fam=4	$\Rightarrow\Rightarrow\Leftarrow\Leftarrow\Rightarrow\Rightarrow\Leftarrow\Leftarrow$
\fam=5	$\nparallel\nparallel\parallel\parallel\parallel\parallel\parallel\parallel$

$123abcABCffffl(0)$
123abcABCffffl(13)
 $123abcABCffffl(14)$
 $123abcABC\uparrow\downarrow(15)$
 $123abcABC\alpha\beta\gamma(-1)$
123abcABC\alpha\beta\gamma(1)

```

1 $\"mathrm{123abcABC\alpha\beta\gamma (\the\fam)
2 }$\\[5pt]
3 $\"mathbf{123abcABC\alpha\beta\gamma (\the\fam)
4 }$\\[5pt]
5 $\"mathit{123abcABC\alpha\beta\gamma (\the\fam)
6 }$\\[5pt]
7 $\"mathsf{123abcABC\alpha\beta\gamma (\the\fam)
8 }$\\[5pt]
9 $\"mathnormal{123abcABC\alpha\beta\gamma (\the\fam
10 fam)}$"

```

44.5 \mathaccent

Requires three parameter as one number, the class, the font family and the character.

\ddot{A}

```

1 \def\dA{\mathaccent"7015\relax}
2 f\Large \$\dA{A}\$"

```

44.6 \mathbin

Declares a following character as a binary symbol with another spacing before and behind such a symbol.

$a|b$

```

1 f\Large
2 \$a\mid b \quad a\mathbin| b\$"

```

44.7 \mathchar

Declares a math character by three integer numbers as Parameters, giving its class, font family, and font position. In the following example \mathchar

defines a character of class 1 (big operators), font family 3 (math extension font) and number 58 (big sum character).

$$a \sum_{i=1}^{\infty} b \quad a \sum_{i=1}^{\infty} b$$

```

1 \f\Large
2 $a\sum\limits_{i=1}^{\infty} b \quad a\mathchar"1358\limits_{i=1}^{\infty} b$
```

44.8 \mathchardef

This is in principle the same as \mathchar, it only allows to make such definitions permanent.

$$a \sum_{i=1}^{\infty} \sqrt{i+1}$$

$$a \sum_{i=1}^{\infty} \sqrt{i+1}$$

```

1 \bgroup
2 \mathchardef\sum="1358
3 $a\sum\limits_{i=1}^{\infty}\sqrt{i+1}$$\backslash[5pt]
4 \egroup
5
6 $a\sum\limits_{i=1}^{\infty}\sqrt{i+1}$
```

44.9 \mathchoice

Specifies specific subformula sizes for the 4 main styles: \displaystyle – \textstyle – \scriptstyle – \scriptscriptstyle.

```

1 \Large
2 \def\myRule{%
3   \color{red}%
4   \mathchoice{\rule{2pt}{20pt}}{\rule{1pt}{10pt}}%
5   {\rule{0.5pt}{5pt}}{\rule{0.25pt}{2.5pt}}%
6   \mkern2mu}%
7 $\myRule\sum\limits_{\myRule i=1}^{\infty}\frac{\sqrt{i+1}}{i^2}$
```

44.10 \mathclose

Assigns class 5 (closing character) to the following parameter, which can hold a single character or a subformula.

$$A : \frac{B}{C} : D$$

$$A : \frac{B}{C} : D$$

```

1 \f\large
2 $A:\frac{B}{C}:D$\backslash[5pt]
3 $A\mathopen{:}\frac{B}{C}\mathclose{:}D$
```

44.11 \mathcode

A math font is far different from a text font. A lot of the characters has to be defined with \mathcode, which defines the character with its class, font family and character number, e.g., \mathcode`<="313C. It defines the character “<” as a realtion symbol (class 3) from the font family 1 and the character number 0x3C, which is 60 decimal.

44.12 \mathop

Assigns class 1 (large operator) to the parameter, which can be a single character or a subformula.

$$\overset{\infty}{\underset{i=1}{A}}^{\infty}$$

```

1 \[ A_{i=1}^{\infty} \]
2 \[ \mathop{A}_{i=1}^{\infty} \]

```

44.13 \mathopen

Vice versa to \mathclose (see section 44.10).

44.14 \mathord

Assigns class 0 (ordinary character) to the following parameter, which can be a single character or a subformula.

$$y = f(x)$$

$$y=f(x)$$

```

1 {\large
2 $y = f(x)$\ [5pt]
3 $y \mathord= f(x)$}

```

44.15 \mathpunct

Assigns class 6 (punctuation) to the following parameter, which can be a single character or a subformula (see section 11.4 for an example).

44.16 \mathrel

Assigns class 3 (relation) to the following parameter, which can be a single character or a subformula.

$$x_1 o x_2 o x_3$$

$$x_1 \mathrel o x_2 \mathrel o x_3$$

```

1 {\large
2 $x_1 \circ x_2 \circ x_3$\ [5pt]
3 $x_1 \mathrel \circ x_2 \mathrel \circ x_3$}

```

44.17 \scriptfont

Specifies the scriptstyle font (used for super/subscript) for a family.

$$A_1 \ A_1$$

```

1 $A_1$
2 \font\tenxii=cmr12
3 \scriptfont0=\tenxii
4 $A_1$ 

```

44.18 \scriptscriptfont

Specifies the scriptscriptstyle font for a family.

44.19 \scriptscriptstyle

Selects scriptscript style for the following characters.

44.20 \scriptstyle

Selects script style for the following characters.

44.21 \skew

Especially for italic characters double accents are often misplaced. \skew has three arguments

horizontal shift: A value in math units for the additional shift of the accent.

the accent: The symbol which is placed above the character.

the character: This is in general a single character, but can also include itself an accent.

AMSmath redefines the setting of double accents. This is the reason why there are only a few cases where someone has to use \skew when the package *amsmath* is loaded, like in this document.

\tilde{i}	\tilde{A}	$\begin{array}{l} 1 \backslash large \\ 2 \$\tilde{i}\$ \quad \$\tilde{A}\$ \\ 3 \$\skew{3}{\tilde{i}}\$ \quad \$\skew{7}{\tilde{A}}\$ \end{array}$
$\tilde{\tilde{i}}$	$\tilde{\tilde{A}}$	

44.22 \skewchar

Is -1 or the character (reference symbol) used to fine-tune the positioning of math accents.

44.23 \textfont

Specifies the text font for a family.

44.24 \textstyle

Selects the text style for the following characters.

45 Math macros**45.1 \above**

```


$$\frac{a}{b}$$

1 $a\above0pt b$\[8pt]
2

$$\frac{a}{b}$$

3 ${a\above1pt b}$\[8pt]
4

$$\frac{a}{b}$$

5 ${a\above2.5pt b}$\[8pt]
6

$$\frac{a}{b}$$

7 $\displaystyle{a\above0pt b}$

```

45.2 \above with delims

```


$$\binom{a}{b}$$

1 $a\abovewithdelims()0pt b$\[8pt]
2

$$\left\{\frac{a}{b}\right\}$$

3 \def\fdelimA{\abovewithdelims{}1.0pt}
4 ${a\fdelimA b}$\[8pt]
5

$$\left[\frac{a}{b}\right]$$

6 \def\fdelimB{\abovewithdelims[]2.0pt}
7 ${a\fdelimB b}$\[8pt]
8

$$\left\{ \begin{matrix} a \\ b \end{matrix} \right.$$

9 \def\fdelimC{\abovewithdelims\{.0pt}
10 ${a\fdelimC b}$

```

45.3 \atop

```


$$\frac{a}{b}$$

1 $a\atop b$\[8pt]
2

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

3 ${\{n\atop k}} = {n!\above1pt k!(n-k)!}$\[8pt]
4

$$\left\{ \begin{matrix} a \\ b \end{matrix} \right.$$

5 $\displaystyle{a\atop b}$

```

45.4 \atop with delims

```


$$\binom{a}{b}$$

1 $a\atopwithdelims() b$\[8pt]
2

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

3 ${\{n\atop k}} = {n!\above1pt k!(n-k)!}$\[8pt]
4

$$\left\{ \begin{matrix} a \\ b \end{matrix} \right.$$

5 $\displaystyle{a\atopwithdelims\{. b}$

```

45.5 \displaylimits

Resets the conventions for using limits with operators to the standard for the used environment.

45.6 \eqno

Puts an equation number at the right margin, the parameter can hold anything. \eqno places only the parameter, but doesn't increase any equation counter.

$$y = f(x) \quad (A12)$$

```
\[ y=f(x) \eqno{(A12)} \]
```

45.7 \everydisplay

Inserts the parameter at the start of every switch to display math mode.

$$f(x) = \int \frac{\sin x}{x} dx$$

$$g(x) = \int \frac{\sin^2 x}{x^2} dx$$

```
\everydisplay{\color{red}
}
\[ f(x) = \int \frac{\sin x}{x} dx
\[ g(x) = \int \frac{\sin^2 x}{x^2} dx
```

45.8 \everymath

Same as \everydisplay, but now for the inline mode. In the following example the displaystyle is used (besides using color red) for every inline math expression.

$$f(x) = \int \frac{\sin x}{x} dx$$

Instead of $\frac{\sin x}{x}$ now with $\frac{\cos x}{x}$:

$$g(x) = \int \frac{\cos x}{x} dx$$

```
\everymath{\color{red}%
\displaystyle
}
\[ f(x) = \int \frac{\sin x}{x} dx
\[ g(x) = \int \frac{\cos x}{x} dx
```

Pay attention for side effects on footnotes and other macros which use the math mode for superscript and other math related modes. In this case you'll get the footnotes also in red.

45.9 \left

TeX calculates the size of the following delimiter needed at the left side of a formula. Requires an additional **right**.

45.10 \leqno

Vice versa to \eqno (see section 45.6).

45.11 \limits

Typesets limits above and/or below operators (see section [6 on page 25](#)).

45.12 \mathinner

Defines the following parameter as subformula.

45.13 \nolimits

The opposite of \limits, instead of above/below limits are placed to the right of large operators (class 1).

45.14 \over

Is equivalent to the fraction macro of L^AT_EX and equivalent to the \overwithdelims, see section [45.16](#).

$$\frac{\frac{a}{b} \quad \frac{\frac{m}{n}}{a+b}}{\frac{m}{n}} \quad \begin{array}{|l} 1 \$ \{a\over b\} \qqquad \{{m\over n}\}\over{a+b}\} \$ \\ 2 \backslash [\{m\over n\}\over{a+b} \backslash] \end{array}$$

45.15 \overline

Puts a line over the following character or subformula and has the same problems with different heights as underlines (see section [45.19](#)).

$$\begin{aligned} \overline{x+y} &= \overline{z} \\ \overline{x+A} &= \overline{z} \\ \overline{x+A} &= \overline{z} \end{aligned} \quad \begin{array}{|l} 1 \$\overline{x}+\overline{y}=\overline{z}\$\\ 2 \let\ol\overline \\ 3 \$\ol{x}+\ol{A}=\ol{z}\$\\ 4 \def\yPh{\vphantom{A}} \\ 5 \$\ol{x\yPh}+\ol{A}=\ol{z\yPh}\$ \end{array}$$

45.16 \overwithdelims

Is a generalized fraction command with preset fraction bar thickness.

$$\begin{aligned} \left(\frac{a}{b}\right) &\quad \left[\frac{\frac{m}{n}}{a+b}\right] \\ \left\{ \frac{\frac{m}{n}}{a+b} \right\} & \quad \begin{array}{|l} 1 \$\{a\overwithdelims() b\} \qqquad \{{m\over n}\}\overwithdelims[] {a+b}\} \$ \\ 2 \backslash [\{m\over n\}\overwithdelims\{{.}{a+b}\} \backslash] \end{array} \end{aligned}$$

45.17 \radical

Makes a radical atom from the delimiter (27-bit number) and the math field.

```

1 \def\mySqrt{\radical"0270371\relax}
2 $ \mySqrt{\frac{1}{7}} $\\[5pt]
3
4 \def\mySqrt{\radical"0270372\relax}
5 $ \mySqrt{\frac{1}{7}} $\\[5pt]
6
7 \def\mySqrt{\radical"0270373\relax}
8 $ \mySqrt{\frac{1}{7}} $\\[5pt]
9
10 \def\mySqrt{\radical"0270374\relax}
11 $ \mySqrt{\frac{1}{7}} $\\[5pt]

```

45.18 \right

Opposite to \left, makes TeX calculate the size of the delimiter needed at the right of a formula.

45.19 \underline

When there is a combination of variables with and without an index, the underlines are typeset with a different depth. Using \vphantom in this case is a good choice.

```

1 $ \underline{x} + \underline{y} = \underline{z} $\\
2
3 \let\ul\underline
4 \def\yPh{\vphantom{y}}
5 $ \ul{x}\yPh + \ul{y} = \ul{z}\yPh $\\
6
7 $ \ul{x_1} + \ul{y_2} = \ul{z_3} $

```

45.20 \vcenter

Centers vertical material with respect to the axis.

46 Math penalties**46.1 \binoppenalty**

A penalty for breaking math expressions between lines in a paragraph. TeX breaks lines only when the binary symbol is not the last one and when the penalty is below 10,000.

46.2 \displaywidowpenalty

The penalty which is added after the penultimate line immediately preceding a display math formula.

46.3 \postdisplaypenalty

Is added immediately after a math display ends.

46.4 \predisplaypenalty

Is added immediately before a math display starts.

46.5 \relpenalty

The penalty for a line break after a relation symbol (if a break is possible).

Part IV

Other packages

The following sections are not a replacement for the package documentation!

47 List of available math packages

accents	alphalph	amsart	amsbook
amsbsy	amscd	amscls	amsfonts
amslatex	amsltx11	amsmath	amspt
amspp1	amsproc	amssym (plain TeX)	amssymb (LaTeX)
amstex (Plain TeX)	amstext	amsthm	bez123
bitfield	brclc	breqn	cancel
cases	comma	datenumber	diagxy
doublestroke	easyeqn	easybmat	easymat
eqnarray	esvect	fixmath	ftlpoint
icomma	leftidx	mathdots	mathtools
mathematica	mil3	mtbe	Nath
numprint	random	romannum	TeXaide

The following examples depend on the listed versions of the packages:

amsopn.sty	1999/12/14 v2.01 operator names
bm.sty	1999/07/05 v1.0g Bold Symbol Support (DPC/FMi)
empheq.sty	2004/08/03 v2.11 Emphasizing equations (MH)
amscd.sty	1999/11/29 v2.0
accents.sty	2000/08/06 v1.2 Math Accent Tools
framed.sty	2002/12/29 v 0.5: framed or shaded text with page breaks
pstcol.sty	2001/06/20 v1.1 PSTricks color colompatibility (DPC)
pstricks.sty	2004/05/06 v0.2k LaTeX wrapper for ‘PSTricks’ (RN,HV)
pstricks.tex	2003/03/07 v97 patch 15 ‘PSTricks’ (tvz)
pst-node.sty	1997/03/25 package wrapper for PSTricks pst-node.tex
delarray.sty	1994/03/14 v1.01 array delimiter package (DPC)
xypic.sty	1999/02/16 Xy-pic version 3.7
exscale.eps	Graphic file (type veps)

47.1 accents

If you want to write for example an underlined M, then you can do it by

```
\underline{$M$}      M
\underbar{$M$}      M
\underaccent{\bar}{M} M
```

As seen, there is no difference between `\underline` and `\underbar`. For some reasons it may be better to use the `accent` package with the `\underaccents` macro.

47.2 *amscd* – commutative diagrams

The `amscd` package is part of the *AMSmath* bundle or available at CTAN²⁷ and has no options for the `\usepackage` command. `amscd` does not support diagonal arrows but is much easier to handle than the complex `pstricks` package or the `xypic` package. On the other hand simple diagrams can be written with the `array` environment or look at [23].

$$\begin{array}{ccc} R \times S \times T & \xrightarrow{\text{restriction}} & S \times T \\ \downarrow \text{proj} & & \downarrow \text{proj} \\ R \times S & \xleftarrow[\text{inclusion}]{} & S \end{array}$$

```

1 \[
2 \begin{CD}
3   R\times S\times T @>\text{restriction}>> S\times T \\
4     @V\text{proj}VV @VV\text{proj}V \\
5   R\times S @<<\text{inclusion}<< S
6 \end{CD}
7 \]

```

47.3 *amsopn*

With the `amsopn` package it is very easy to declare new math operators, which are written in upright mode:

$\underset{s=p}{Res}$ versus $\underset{s=p}{\mathrm{Res}}$

```

1 \documentclass[10pt]{article}
2 \usepackage{amsmath}
3 \usepackage{amsopn}
4 \DeclareMathOperator{\Res}{Res}
5 \begin{document}
6 $\underset{s=p}{\mathrm{Res}}\quad \underset{s=p}{\mathrm{quad}}\underset{s=p}{\mathrm{\Res}}$ 
7 \end{document}

```

Table 20 shows the predefined operatornames of `amsopn`.

47.4 *bigdel*

This is a very useful package together with the `multirow` package. In the following example we need additional parentheses for a different number of

²⁷CTAN://macros/latex/required/amslatex/math/amscd.dtx

\arccos	arccos	\arcsin	arcsin	\arctan	arctan
\arg	arg	\cos	cos	\cosh	cosh
\cot	cot	\coth	coth	\csc	csc
\deg	deg	\det	det	\dim	dim
\exp	exp	\gcd	gcd	\hom	hom
\inf	inf	\injlim	inj lim	\ker	ker
\lg	lg	\lim	lim	\liminf	lim inf
\limsup	lim sup	\ln	ln	\log	log
\max	max	\min	min	\Pr	Pr
\projlim	proj lim	\sec	sec	\sin	sin
\sinh	sinh	\sup	sup	\tan	tan
\tanh	tanh				

Table 20: The predefined operators of *amsopn.sty*

rows. This is also possible with the `array` environment, but not as easy as with the `bigdelim` package. The trick is that you need one separate column for a big delimiter, but with empty cells in all rows, which the delimiter spans.

$$\left(\begin{array}{cccc} x_{11} & x_{12} & \dots & x_{1p} \\ x_{21} & x_{22} & \dots & x_{2p} \\ \vdots & & & \\ x_{n_11} & x_{n_12} & \dots & x_{n_1p} \\ x_{n_1+1,1} & x_{n_1+1,2} & \dots & x_{n_1+1,p} \\ \vdots & & & \\ x_{n_1+n_2,1} & x_{n_1+n_2,2} & \dots & x_{n_1+n_2,p} \\ \vdots & & & \end{array} \right) \quad \left. \begin{array}{l} \text{some text} \\ \text{some more text} \end{array} \right)$$

```

1 \[
2   \begin{pmatrix}
3     & x_{\{11} & x_{\{12} & \dots & x_{\{1p} & \rdelem\}{4}{3cm}[some text]\\
4     & \ldelem\{5}{1cm}[text] & x_{\{21} & x_{\{22} & \dots & x_{\{2p} \\
5     & \vdots\\
6     & x_{\{n\_1 1}& x_{\{n\_1 2} & \dots & x_{\{n\_1 p}\\
7     & x_{\{n\_1+1,1}&x_{\{n\_1+1,2} & \dots & x_{\{n\_1+1, p} &
8       \rdelem\}{3}{3cm}[some more text]\\
9     & \vdots\\
10    & x_{\{n\_1+n\_2, 1} & x_{\{n\_1+n\_2,2} & \dots & x_{\{n\_1+n\_2, p}\\
11    & \vdots\\
12    \end{pmatrix}
13 \]

```

As seen in the above listing the left big delimiter is placed in the first column, all other rows start with second column. It is possible to use all

columns above and below the delimiter. For the `array` environment there must be two more columns defined, in case of a big delimiter left and right. The syntax of `\ldelem` and `\rdelem` is:

```
\ldelem<delimiter>{<n rows>}{<added horizontal space>}[<text>]
\rdelem<delimiter>{<n rows>}{<added horizontal space>}[<text>]
```

Any delimiter which is possible for the `\left` or `\right` command is allowed, e.g., “`() [] {} |`”. The text is an optional argument and always typeset in text mode.

47.5 *bm*

By default the math macro `\mathbf` writes everything in bold and in upright mode $y = f(x)$ (`\mathbf{y=f(x)}`), but it should be in italic mode especially for variables $y = f(x)$ (`\bm{y=f(x)}`), which is possible with the package `bm`. For writing a whole formula in bold have a look at section [22 on page 47](#).

47.6 *braket*

It is available at CTAN://macros/latex/contrib/other/misc;braket.sty and provides several styles for writing math expressions inside brackets. For example:

$$\left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\}$$

```
1 \[ \left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\} \]
```

looks not quite right and it is not really easy to get the first vertical line in the same size as the outer braces. Some solution may be using `\vphantom`:

$$\left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\}$$

```
1 \[
2 \left\{ \vphantom{\frac{5}{3}} x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\}
3 \]
```

The package `braket` has the macros

```
1 \Bra{<math expression>}
2 \Ket{<math expression>}
3 \Braket{<math expression>}
4 \Set{<math expression>}
```

and the same with a leading lower letter, which are not really interesting.

$$\begin{aligned} & \left\langle x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right| \\ & \left| x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\rangle \\ & \left\langle x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\rangle \\ & \left\langle x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\rangle \\ & \left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\} \end{aligned}$$

```

1 \[ \Bra{x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3}} \]
2 \[ \Ket{x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3}} \]
3 \[ \Braket{x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3}} \]
4 \[ \Braket{x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3}} \]
5 \[ \Set{x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3}} \]
```

The difference between the `\Set` and the `\Braket` macro is the handling of the vertical lines. In `\Set` only the first one gets the same size as the braces and in `\Braket` all.

$$\begin{aligned} & \left\langle \phi \mid \frac{\partial^2}{\partial t^2} \right| \psi \rangle \\ & \left\{ \phi \mid \frac{\partial^2}{\partial t^2} \right| \psi \right\} \end{aligned}$$

```

1 \[ \Braket{\phi \mid \frac{\partial^2}{\partial t^2} \mid \psi} \]
2 \[ \Set{\phi \mid \frac{\partial^2}{\partial t^2} \mid \psi} \]
```

`\Bra` and `\Ket` do nothing with the inner vertical lines.

47.7 cancel

This is a nice package for canceling anything in mathmode with a slash, backslash or a X. To get a horizontal line we can define an additional macro called `\hcancel` with an optional argument for the line color (requires package `color`):

```

1 \newcommand{\hcancel}[2][black]{\setbox0=\hbox{\#2}%
2 \rlap{\raisebox{.45\ht0}{\textcolor{#1}{\rule{\wd0}{1pt}}}}\box0\#2}
```

It is no problem to redefine the `\cancel` macros to get also colored lines. A horizontal line for single characters is also described in section [14 on page 40](#).

$$\cancel{f(x)} = \frac{(x^2 + 1) \cancel{(x - 1)}}{\cancel{(x - 1)}(x + 1)}$$

`\bcancel: 3 1234567`

`\xcancel: X 1234567`

`\hcancel: 3 1234567`

```

1 $f(x)=\frac{x^2+1}{(x+1)}\cancel{(x-1)}\cancel{(x-1)}\\[0.5cm]
2 \$\bcancel{3}\quad\bcancel{1234567}\\[0.5cm]
3 \$\xcancel{3}\quad\xcancel{1234567}\\[0.5cm]
4 \$\hcancel{3}\quad\hcancel[red]{1234567}$
```

47.8 cool

The `cool` package defines a lot of special mathematical expressions to use them by the macro name. The following list shows only some of them, for more informations look at the example file, which comes with the package.

```

\Sin{x}   sin(x)
\Cos{x}   cos(x)
\tan{x}   tan(x)
\Csc{x}   csc(x)
\Sec{x}   sec(x)
\cot{x}   cot(x)

\Style{ArcTrig=inverse} (default)

\ArcSin{x}   \sin^{-1}(x)
\ArcCos{x}   \cos^{-1}(x)
\ArcTan{x}   \tan^{-1}(x)

\Style{ArcTrig=arc}

\ArcSin{x}   \arcsin(x)
\ArcCos{x}   \arccos(x)
\ArcTan{x}   \arctan(x)
\ArcCsc{x}   \csc^{-1}(x)
\ArcSec{x}   \sec^{-1}(x)
\ArcCot{x}   \cot^{-1}(x)
```

```

\Factorial{n}           n!
\DblFactorial{n}        n!!
\Binomial{n}{k}           $\binom{n}{k}$ 
\Multinomial{1,2,3,4}    (10; 1, 2, 3, 4)

\GammaFunc{x}             $\Gamma(x)$ 
\IncGamma{a}{x}           $\Gamma(a, x)$ 
\GenIncGamma{a}{x}{y}     $\Gamma(a, x, y)$ 
\RegIncGamma{a}{x}        $Q(a, x)$ 
\RegIncGammaInv{a}{x}     $Q^{-1}(a, x)$ 
\GenRegIncGamma{a}{x}{y}  $Q(a, x, y)$ 
\GenRegIncGammaInv{a}{x}{y}  $Q^{-1}(a, x, y)$ 
\Pochhammer{a}{n}          $(a)_n$ 
\LogGamma{x}              $\log\Gamma(x)$ 

\Hypergeometric{0}{0}{}{}{x}    ${}_0F_0(; ; x)$ 
\Hypergeometric{0}{1}{}{}{b}{x}  ${}_0F_1(; b; x)$ 

\RegHypergeometric{0}{0}{}{}{x}    ${}_0\tilde{F}_0(; ; x)$ 
\RegHypergeometric{0}{1}{}{}{b}{x}  ${}_0\tilde{F}_1(; b; x)$ 

\MeijerG[a,b]{n}{p}{m}{q}{x}
   $G_{p,q}^{m,n}\left(x \middle| \begin{matrix} a_1, \dots, a_n, a_{n+1}, \dots, a_p \\ b_1, \dots, b_m, b_{m+1}, \dots, b_q \end{matrix}\right)$ 
\MeijerG{1,2,3,4}{5,6}{3,6,9}{12,15,18,21,24}{x}
   $G_{6,8}^{3,4}\left(x \middle| \begin{matrix} 1, 2, 3, 4, 5, 6 \\ 3, 6, 9, 12, 15, 18, 21, 24 \end{matrix}\right)$ 

\RiemannZeta{s}            $\zeta(s)$ 
\Zeta{s}                   $\zeta(s)$ 
\HurwitzZeta{s}{a}         $\zeta(s, a)$ 
\Zeta{s,a}                 $\zeta(s, a)$ 
\RiemannSiegelTheta{x}     $\vartheta(x)$ 
\RiemannSiegelZ{x}          $Z(x)$ 
\StieltjesGamma{n}          $\gamma_n$ 

\MathieuC{a}{q}{z}          Ce( $a, q, z$ )
\MathieuS{a}{q}{z}          Se( $a, q, z$ )

\MathieuCharacteristicA{r}{q}       $a_r(q)$ 
\MathieuCharisticA{r}{q}             $a_r(q)$ 
\MathieuCharacteristicB{r}{q}       $b_r(q)$ 
\MathieuCharisticB{r}{q}             $b_r(q)$ 
\MathieuCharacteristicExponent{a}{q}  $r(a, q)$ 
\MathieuCharisticExp{a}{q}           $r(a, q)$ 

```

47.9 *delarray*

Package *delarray*²⁸ supports different delimiters which are defined together with the beginning of an array:

```
1 \begin{array}{<delLeft>{cc}<delRight>}
2 ...
```

defines an array with two centered columns and the delimiters “*<delLeft><delRight>*”, e.g., “()”.

```
1 \[
2 A=\begin{array}{(cc)}
3   a & b \\
4   c & d
5 \end{array}
6 \]
```

$$A = \begin{pmatrix} a & b \\ c & d \end{pmatrix}$$

The *delarray* package expects a pair of delimiters. If you need only one (like the cases structure) then use the dot for an “empty” delimiter, e.g.,

```
1 \[
2 A=\begin{array}{\{{cc}\}.}
3   a & b \\
4   c & d
5 \end{array}
6 \]
```

$$A = \begin{cases} a & b \\ c & d \end{cases}$$

which is a useful command for a cases structure without the *AMSmath* package, which is described in the *AMSmath* part.

47.10 *dotseqn*

This package²⁹ fills the space between the math expression and the equation number with dots. Expect problems when using this package together with *AMSmath*.

$$F(x) = \int f(x) dx + C \dots \dots \dots \dots \dots \dots \dots \quad (47.1)$$

$$F(x) = \int f(x) dx + C \dots \dots \dots \dots \dots \dots \dots \dots \quad (47.2)$$

²⁸CTAN://macros/latex/required/tools/delarray.dtx

²⁹CTAN://macros/latex/contrib/dotseqn

```

1 \begin{eqnarray}
2   F(x) &=& \int f(x)\,,\mathbf{d}x + C
3 \end{eqnarray}
4 %
5 \begin{equation}
6   F(x)=\int f(x)\,,\mathbf{d}x + C
7 \end{equation}

```

47.11 `empheq`

This package supports different frames for math environments of the \mathcal{AM} Smath package. It doesn't support all the environments from standard L^AT_EX which are not modified by \mathcal{AM} Smath, e.g., `eqnarray` environment.

With the optional argument of the `empheq` environment the preferred box type can be specified. A simple one is `\fbox`

$$f(x) = \int_1^\infty \frac{1}{x^2} dt = 1 \quad (47.3)$$

```

1 \begin{empheq}[box=\fbox]{align}
2   f(x)=\int_1^\infty \frac{1}{x^2}\,,dt=1
3 \end{empheq}

```

The same is possible with the macro `\colorbox`:

$$f(x) = \int_1^\infty \frac{1}{x^2} dt = 1 \quad (47.4)$$

```

1 \begin{empheq}[box={\colorbox{yellow}}]{align}
2   f(x)=\int_1^\infty \frac{1}{x^2}\,,dt=1
3 \end{empheq}

```

The key `box` can hold any possible L^AT_EX command sequence. Boxing subequations is also no problem, the `empheq` environment works in the same way:

$$f(x) = \int_1^\infty \frac{1}{x^1} dt = 1 \quad (47.5a)$$

$$f(x) = \int_2^\infty \frac{1}{x^2} dt = 0.25 \quad (47.5b)$$

```

1 \begin{subequations}
2 \begin{empheq}[box={\colorbox{cyan}}]{align}
3   f(x) &= \int_1^\infty \frac{1}{x^2}\,,dt=1\\

```

```

4   f(x) & =\int_{-\infty}^{\infty}\frac{1}{x^2}, \dt=0.25
5 \end{empheq}
6 \end{subequations}
```

For more information on `empheq` package have a look at the documentation of the package which is available at any CTAN server.

47.12 esint

This is a very useful package when you want nice double or triple integral or curve integral symbols. The ones from the `wasysym` package³⁰ are not the best. `esint`³¹ supports the following symbols:

$$\backslash int : \int \quad (47.6)$$

$$\backslash iint : \iint \quad (47.7)$$

$$\backslash iiintop : \iiint \quad (47.8)$$

$$\backslash iiiintop : \iiiiint \quad (47.9)$$

$$\backslash dotsintop : \cdots \int \quad (47.10)$$

$$\backslash ointop : \oint \quad (47.11)$$

$$\backslash oiint : \oint\!\!\! \int \quad (47.12)$$

$$\backslash sqint : \sqint \quad (47.13)$$

$$\backslash sqaint : \sqaint \quad (47.14)$$

$$\backslash ointccw : \oint_{\text{ccw}} \quad (47.15)$$

$$\backslash ointcw : \oint_{\text{cw}} \quad (47.16)$$

$$\backslash varointccw : \oint_{\text{var ccw}} \quad (47.17)$$

$$\backslash varointcw : \oint_{\text{var cw}} \quad (47.18)$$

$$\backslash fint : \fint \quad (47.19)$$

³⁰CTAN://macros/latex/contrib/wasysym/

³¹CTAN://macros/latex/contrib/esint/ CTAN://fonts/ps-type1/esint/

$$\backslash varoint : \oint \quad (47.20)$$

$$\backslash landupint : \int \quad (47.21)$$

$$\backslash landdownint : \int \quad (47.22)$$

47.13 eucal and euscript

These packages should be part of your local T_EX installation, because they come with the *AMSmath* packages. Otherwise get them from CTAN³². They support a scriptwriting of only uppercase letters:

```
\mathscr{...} ABCDEFGHIJKLMNOPQRSTUVWXYZ
```

Read the documentation for the interdependence to the `\mathcal` command. For the above example the package *eucal* was loaded with the option `mathscr`.

47.14 exscale

The following formula is written with the default fontsize where everything looks more or less well:

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

Writing the same with the fontsize `\huge` gives a surprising result, which belongs to the historical development of L_AT_EX, the `\int` and `\sum` symbols are not stretched. This extreme fontsize is often needed for slides and not only written “just for fun”.

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

Using the `exscale` package³³ package, which should be part of any local T_EX installation, all symbols get the right size.

³²CTAN://fonts/amsfonts/latex/euscript.sty

³³CTAN://macros/latex/base/

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

47.15 mathtools

This package comes with a lot of additional features for typesetting math code. Sometimes it is useful when only such equations are numbered which are referenced in the text. This is possible with the switch `\showonlyrefs`.

Matrices are set by default with a centered horizontal alignment, which is often not the best way. The `mathtools` package provides a starred version of the matrix environments which allow an optional argument for the horizontal alignment:

$$\begin{pmatrix} 1 & -1 & 0 \\ -1 & 1 & -1 \\ 1 & -1 & 0 \\ -11 & 11 & -11 \end{pmatrix}$$

```

1 \[
2 \begin{pmatrix}[r]
3   1 & -1 & 0 \\
4   -1 & 1 & -1 \\
5   1 & -1 & 0 \\
6   -11 & 11 & -11
7 \end{pmatrix}
8 \]
```

`mathtools` also provides some more environments for setting equations. Very interesting is the `lgathered` environment, which allows to typeset a formula in the following way:

$$\begin{aligned} x = & a + b + c \\ & d + e + f + g + h \\ & i + j + k \end{aligned} \tag{47.23}$$

```

1 \begin{aligned}
2 x &\equiv
3 \begin{lgathered}[t]
4 a + b + c \\
5 d + e +
6 \!\!\! \begin{gathered}
7 f + g + h \\
8 i + j + k
9 \end{gathered}
10 \end{lgathered}
11 \end{aligned}
```

The `\!` revokes the internal horizontal space in front of the `gathered` environment.

47.16 nicefrac

Typesetting fractions in the inline mode is often a bad choice, the vertical spacing increases in fact of the fraction. The `nicefrac` package defines the macro `\nicefrac`, which is used in the same way as the `\frac` command, but it typesets the fraction with a less height: $\frac{2}{3}$ `\nicefrac{2}{3}`. The package is part of the `units` package bundle and can be found in the directory of `units`.

47.17 relsize

Often consecutive math operators are used, like two sum symbols, e.g.,

$$\sum_{i=1}^n i^2$$

As seen the sums are of the same size. To increase the first operator size, someone can use the `\scalebox` macro from package `graphicx` environment and write an own macro `\Sum`, e.g.,

```
1 \def\Sum{\ensuremath{\mathop{\scalebox{1.2}{\$}}\displaystyle\sum}}
2 [\ \Sum_{j=1}\sum_{i=1}^{\infty} i \ ]
```

$$\sum_{j=1}^{\infty} \sum_{i=1}^{\infty} i$$

Another solution is to use the `relsize` package³⁴ together with the `exscale` one. `relsize` defines a useful macro `\mathlarger`:

$$\sum_{i=1}^n i^2$$

```
\mathlarger{\sum_{i=1}^n i^2 }
```

47.18 xypic

The `\xymatrix` macro is part of the `xypic` package³⁵ which can be loaded with several options which are not so important here.³⁶.

³⁴CTAN://macros/latex/ltxmisc/

³⁵CTAN://macros/generic/diagrams/xypic/xy-3.7/

³⁶For more information look at the package documentation or the package `xy` itself, which is often saved in `/usr/share/texmf/tex/generic`

$$\begin{array}{ccc}
 A & B & C \\
 \left\{ \begin{array}{c} \\ \end{array} \right. & \searrow & \\
 D & \cdots \cdots E & \sim \sim F \\
 & & \nearrow \begin{array}{c} \\ \end{array} \\
 G & H & I
 \end{array} \tag{47.24}$$

This matrix was created with

```

1 \[
2 \xymatrix{ A\POS [] ; [d]**\dir {~},[] ; [dr]**\dir {-} & B & C \\
3 & D & E\POS [] ; [l]**\dir {.},[] ; [r]**\dir {~} & F\POS [] ; [dl] \\
4 & ]**\dir {~} \\
5 & G & H & I }
6 \]

```

Part V

Math fonts

Typesetting text and math is far different. There exist a lot of free text fonts without additional math characters. This is the reason why we have to buy a commercial math font, e.g. Palatino (`pamath`) or Helvetica (`hvmath`), or to combine the free text font with another free math font.

48 Computer modern

This is the default font, designed by Knuth. For the PDF output the Type 1 fonts cm-super and BlueSky were used.

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

AΛΔ∇BCDΣEFGHIJKLMNOPΘΩΨΡΦΠΞQRSTUVWXYYΨΖ
 $a\alpha b\beta c\partial d\delta e\epsilon f\zeta\xi g\gamma h\bar{h}\bar{h}i\bar{i}j\bar{j}k\kappa\kappa\ell\lambda m n\eta\theta\vartheta o\sigma s\phi\varphi\varrho p\varrho q r s t\tau\pi u\mu v v w w\omega\varpi$
 $x\chi y\psi z\infty\propto\emptyset\varnothing d\eth\eth$

49 Latin modern

This is the new designed font which comes with an own Type 1 version `lmodern`

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

AΛΔ∇BCDΣEFGHIJKLMNOPΘΩΨΡΦΠΞQRSTUVWXYYΨΖ
 $a\alpha b\beta c\partial d\delta e\epsilon f\zeta\xi g\gamma h\bar{h}\bar{h}i\bar{i}j\bar{j}k\kappa\kappa\ell\lambda m n\eta\theta\vartheta o\sigma s\phi\varphi\varrho p\varrho q r s t\tau\pi u\mu v v w w\omega\varpi$
 $x\chi y\psi z\infty\propto\emptyset\varnothing d\eth\eth$

50 Palatino

There is a free package `mathpazo`.

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

AΛΔ∇BCDΣΕFFGHΙJKLMΝΟΘΩԾΡΦΠΞQRSTUVWXYΨΖ
ααbβcδdδeeεfζξgγhհիiiյjkkռլλmηθթօσչփφօրρօqrsտπսμνսսաա
xչyψz∞ α Ødð Յ

51 Palatino – microimp

There is the package `pamath` for the nonfree palatino font.

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

AΛΔ∇BCDΣΕFFGHΙJKLMΝΟΘΩԾΡՓΠΞQRSTUVWXYΨΖ
աաbβcδdδeeεfζξgγhհիiiյjkkռլլmηθթօσչփφօրրօqrsտπսμնսսաա
xչyψz∞ α Ødð Յ

52 cmbright

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

ΑΛΔΔΒCDΣΕFΓGHΙJKLMΝΟΘΩΡΦΠΞQRSTUVWXΥΤΨΖ
ααbβcδdδeεεfζξgγhhhuijjkkκιlλmηθθoσςφφρρρρqrstτπιμνννwωω
xχyψz∞ ∝ Ødð e

53 minion

Theorem 1 (Residuum). Für eine in einer punktierten Kreisscheibe $D \setminus \{a\}$ analytische Funktion f definiert man das Residuum im Punkt a als

$$\underset{z=a}{\text{Res}} f(z) = \underset{a}{\text{Res}} f = \frac{1}{2\pi i} \int_C f(z) dz,$$

wobei $C \subset D \setminus \{a\}$ ein geschlossener Weg mit $n(C, a) = 1$ ist (z.B. ein entgegen dem Uhrzeigersinn durchlaufener Kreis).

ΑΛΔΔΒCDΣΕFΓGHΙJKLMΝΟΘΩΡΦΠΞQRSTUVWXΥΤΨΖ
ααbβcδdδeεεfζξgγhhhuijjkkκιlλmηθθoσςφφρρρρqrstτπιμνννwωω
xχyψz∞ ∝ Ødð e

Part VI

Special symbols

In this section only those symbols are defined, which are not part of the list of all available symbols: <CTAN://info/symbols/comprehensive/symbols-a4.pdf>. With `fontmath.ltx` L^AT_EX itself defines the following special symbols for using inside math:

Name	Meaning
<code>\mathparagraph</code>	¶
<code>\mathsection</code>	§
<code>\mathdollar</code>	\$
<code>\mathsterling</code>	£
<code>\mathunderscore</code>	_
<code>\mathellipsis</code>	...

Table 21: Predefined math symbols from `fontmath.ltx`

54 Integral symbols

Name	Symbol
<code>\dashint</code>	\int
<code>\ddashint</code>	\int_0^∞
<code>\clockint</code>	\oint
<code>\counterint</code>	\oint_A

For all new integral symbols limits can be used in the usual way:

$$\oint_0^\infty 1 = \int_1^0 < \oint_{-\infty}^\infty = \oint \oint_A \quad (54.1)$$

```
1 \ddashint_01=\dashint_10<\oint\limits_{\{-\infty}\}^{\infty}\int\limits_{A}
```

Put the following definitions into the preamble to use one or all of these new integral symbols.

```
1 \def\Xint#1{\mathchoice
2   {\XXint\displaystyle\textstyle{#1}}%
3   {\XXint\textstyle\scriptstyle{#1}}%
4   {\XXint\scriptstyle\scriptscriptstyle{#1}}%
5   {\XXint\scriptscriptstyle\scriptscriptstyle{#1}}%
6   \!\!#1}
7 \def\XXint#1#2#3{{\setbox0=\hbox{$#1#2#3$\int}}%
8   \vcenter{\hbox{$\kern-.5\wd0$}}
```

```

9 | \def\ddashint{\Xint=}
10| \def\dashint{\Xint-}
11| \def\clockint{\Xint\circlearrowright} % GOOD!
12| \def\counterint{\Xint\rotcirclearrowleft} % Good for Computer
   Modern!
13| \def\rotcirclearrowleft{\mathpalette{\RotLSymbol{-30}}\circlearrowleft}
14| \def\RotLSymbol#1#2#3{\rotatebox[origin=c]{#1}{#2#3}}

```

55 Harpoons

LATEX knows no stretchable harpoon symbols, like `\xrightarrow`. The following code defines several harpoon symbols.

```

1 \def\rightharpoondownfill@{%
2   \arrowfill@\relbar\relbar\rightharpoondown}
3 \def\rightharpoonupfill@{%
4   \arrowfill@\relbar\relbar\rightharpoonup}
5 \def\leftharpoondownfill@{%
6   \arrowfill@\leftharpoondown\relbar\relbar}
7 \def\leftharpoonupfill@{%
8   \arrowfill@\leftharpoonup\relbar\relbar}
9 \newcommand{\xrightharpoondown}[2][]{%
10   \ext@arrow 0359\rightharpoondownfill@{#1}{#2}}
11 \newcommand{\xrightharpoonup}[2][]{%
12   \ext@arrow 0359\rightharpoonupfill@{#1}{#2}}
13 \newcommand{\xleftharpoondown}[2][]{%
14   \ext@arrow 3095\leftharpoondownfill@{#1}{#2}}
15 \newcommand{\xleftharpoonup}[2][]{%
16   \ext@arrow 3095\leftharpoonupfill@{#1}{#2}}
17 \newcommand{\xleftrightharpoons}[2][]{\mathrel{%
18   \raise.22ex\hbox{%
19     $\ext@arrow 3095\leftharpoonupfill@\phantom{#1}{#2}$}%
20   \setbox0=\hbox{%
21     $\ext@arrow 0359\rightharpoondownfill@\phantom{#2}{#1}$}%
22   \kern-\wd0 \lower.22ex\box0}%
23 }
24 \newcommand{\xrightleftharpoons}[2][]{\mathrel{%
25   \raise.22ex\hbox{%
26     $\ext@arrow 3095\rightharpoonupfill@\phantom{#1}{#2}$}%
27   \setbox0=\hbox{%
28     $\ext@arrow 0359\leftharpoondownfill@\phantom{#2}{#1}$}%
29   \kern-\wd0 \lower.22ex\box0}%
30 }

```

```

\xrightharpoondown
\xrightharpoonup
\xleftharpoondown
\xleftharpoonup
\xleftrightharpoons
\xrightleftharpoons

```

$\xrightarrow{\text{over}}_{\text{under}}$	$\xrightarrow{\text{over}}_{\text{under}}$

56 Bijective mapping arrow

To get something like \rightarrowtail we can define:

```

1 \def\bijmap{%
2   \ensuremath{%
3     \mathrlap{\rightarrowtail}\rightarrow%
4   }%
5 }
```

This uses the `\mathrlap` definition from section [35.2 on page 73](#). With this definition a huge symbol is also possible: $\Huge\bijmap$ \rightarrowtail .

57 Stacked equal sign

There are several symbols stacked with an equal sign, e.g., `\doteq`, `\equiv` or `\cong` (\doteq , \equiv , \cong). But there are still some missing, which are shown in table [22](#) and the following definitions.

$$\begin{array}{ll} \backslash eqdef & \stackrel{\text{def}}{=} \\ \backslash eqexcl & \stackrel{!}{=} \\ \backslash eqhat & \widehat{=} \end{array}$$

Table 22: New symbols in combination with the equal sign

```

1 \newcommand{\eqdef}{\mathrel{\stackrel{\text{def}}{=}}}
2 \newcommand{\eqexcl}{\mathrel{\stackrel{!}{=}}}
3 \newcommand{\eqhat}{\mathrel{\widehat{=}}}
```

58 Other symbols

```

1 \newcommand*\threesim{%
2   \mathrel{\vcenter{\offinterlineskip
3     \hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}}}
4 $\\threesim ABC$
```

$\approx ABC$


```

1 \newcommand\Let{\mathrel{\mathop{:}}! ! =}%
2   \textit{Upper case L!}
3 \newcommand\tel{\mathrel{= ! ! \mathop{:}}}
$\\x\\Let y$ $y\\tel x$
```

$x := y$ $y =: x$

Part VII

Examples

59 Tuning math typesetting

Chapter 18 of the TeXbook is named „Fine Points of Mathematics Typing“ [12] and it shows on 20 pages some more or less important facts when typesetting mathematical expressions. Often inline formulas contain a punctuation character like a dot, comma, colon, etc.. It is a general rule to write those characters outside the math mode. Compare

$a, b, c, d, e,$ and f

$a, b, c, d, e,$ and f

```
1 $a, b, c, d, e, \text{and } f$ \\[5pt]
2 $a$, $b$, $c$, $d$, $e$, and $f$
```

Having such math as single expressions enables TeX to insert a linebreak at several places (see Section 2.6 on page 13).

Writing an ellipses as three single dots, doesn't look very nice, one should always use the `\ldots` command:

$1, \dots, 10$

$1, \dots, 10$

```
1 $1, \dots, 10$ \\[5pt]
2 $1, \ldots, 10$
```

This is correct as long as on the left and right are a comma as a separator. For sums the `\cdots` command should be used instead:

$1 + 2 + \cdots + 10$

$x_n = x_{n-1} = \cdots = x_0 = 1$

```
1 $1+2+\cdots+10$ \\[5pt]
2 $x_n=x_{n-1}=\cdots=x_0=1$
```

For a multiplication it is important which character is used, in european countries often a centered dot. In such a case it is appropriate not to use the `\cdots` command for a ellipsis.

For typesetting integrals or differential equations it makes sense to define the following short macros:

```
1 \newcommand*\dy{\ ,\mathit{d}y}
2 \newcommand*\dx{\ ,\mathit{d}x}
3 \newcommand*\dyx{\ ,\frac{\mathit{d}y}{\mathit{d}x}}
4 \newcommand*\ds{\ ,\mathit{d}s}
5 \newcommand*\dt{\ ,\mathit{d}t}
6 \newcommand*\dst{\ ,\frac{\mathit{d}s}{\mathit{d}t}}
```

$$\begin{aligned} F(x) &= \int f(x) \, dx \\ v(t) &= \frac{ds}{dt} \\ a(t) &= \frac{d^2s}{dt^2} \end{aligned}$$

```
1 \begin{aligned*}
2 F(x) &= \int !f(x) \, dx \\
3 v(t) &= \dst \\
4 a(t) &= \frac{\mathit{d}s}{\mathit{d}t} \\
&\sim 2 \\
5 \end{aligned*}
```

$$G(t) = \underbrace{\int \cdots \int}_D dx dy \dots$$

$$u_C(t) = \int i_C(t) dt$$

```

1 \begin{align*}
2 G(t) &= \underbrace{\int \cdots \int}_D dx dy \ldots \\
3 u_C(t) &= \int i_C(t) dt
4 \end{align*}

```

60 Matrix

60.1 Identity matrix

There are several possibilities to write this matrix. Here is a solution with the default array environment.

$$\begin{pmatrix} 1 & & & & \\ & 1 & & 0 & \\ & & 1 & & \\ 0 & & & 1 & \\ & & & & 1 \end{pmatrix}$$

```

1 [
2 \left(
3   \begin{array}{ccccc}
4     1 \\
5     & 1 & & \text{\huge{0}} & \\
6     & & 1 \\
7     & & & \text{\huge{0}} & \\
8     & & & & 1
9   \end{array}
10 \right)
11 ]

```

60.2 System of linear equations

$$\begin{aligned}
y_1 &= x_{11} + x_{12} + x_{13} + \dots + x_{1(n-1)} + x_{1n} \\
y_2 &= x_{21} + x_{22} + x_{23} + \dots + x_{2(n-1)} + x_{2n} \\
&\vdots \quad \vdots \quad \vdots \quad \vdots \quad \vdots \quad \vdots \\
y_{n-1} &= x_{(n-1)1} + x_{(n-1)2} + x_{(n-1)3} + \dots + x_{(n-1)3} + x_{(n-1)n} \\
y_n &= x_{n1} + x_{n2} + x_{n3} + \dots + x_{(n-1)(n-1)} + x_{nn}
\end{aligned}$$

```

1 [
2 \begin{array}{l@{\cdot\cdot\cdot\cdot\cdot}l}
3 y_1 & x_{11} + x_{12} + x_{13} + \dots + x_{1(n-1)} + x_{1n} \\
4 y_2 & x_{21} + x_{22} + x_{23} + \dots + x_{2(n-1)} + x_{2n} \\
5 \vdots & \vdots + \vdots + \vdots + \vdots + \vdots + \vdots \\
6 y_{n-1} & x_{(n-1)1} + x_{(n-1)2} + x_{(n-1)3} + \dots + x_{(n-1)3} + x_{(n-1)n} \\
7 y_n & x_{n1} + x_{n2} + x_{n3} + \dots + x_{(n-1)(n-1)} + x_{nn}
8 \end{array}
9 ]

```

60.3 Matrix with comments on top

$$\begin{bmatrix} X_x & Y_x & Z_x & T_x \\ X_y & Y_y & Z_y & T_y \\ X_z & Y_z & Z_z & T_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

↓ ↓ ↓ ↓
text1 text1 text1 text1

```

1 \def\rb#1{\rotatebox{90}{\$xleftarrow{#1}\$}}
2 \begin{tabular}{c}
3 $ \begin{matrix}
4 \rb{text1} & \rb{text1} & \rb{text1} & \rb{text1} \\
5 \end{matrix} $ \\
6 $ \begin{bmatrix}
7 X_x & Y_x & Z_x & T_x \\
8 X_y & Y_y & Z_y & T_y \\
9 X_z & Y_z & Z_z & T_z \\
10 0 & 0 & 0 & 1
11 \end{bmatrix} $ \\
12 \end{tabular}

```

61 Cases structure

Sometimes it is better to use the array environment instead of amsmath's cases environment. To get optimal horizontal spacing for the conditions, there are two matrixes in series, one 3×1 followed by 3×3 matrix. To minimize the horizontal space around the variable z a

```
1 \addtolength{\arraycolsep}{-3pt}
```

is a useful command.

$$I(z) = \delta_0 \begin{cases} D + z & -D \leq z \leq -p \\ D - \frac{1}{2} \left(p - \frac{z^2}{p} \right) & -p \leq z \leq p \\ D - z & p \leq z \leq D \end{cases} \quad (61.1)$$

```

1 \addtolength{\arraycolsep}{-3pt}
2 I(z)=\delta_0\left.\left.\left.
3 \begin{array}{lcrcl}
4 D+z & \quad & -D & \leq & z & \leq -p \\
5 D-\frac{1}{2}(p-\frac{z^2}{p}) & \quad & -p & \leq & z & \leq p \\
6 D-z & \quad & p & \leq & z & \leq D
7 \end{array}\right.\right.\right.
8 \end{array}\right.\right.\right.
9 \end{array}\right.\right.\right.

```

The `\phantom` command replaces exactly that place with whitespace which the argument needs.

61.1 Cases with numbered lines

This is not possible in an easy way, because `cases` uses the array environment for typesetting which has by default no numbering. However, there are some tricky ways to get numbered lines. The following three examples use the `tabular`, the `tabularx` and the `array` environment.

$$\text{some text here} \left\{ \begin{array}{ll} x = 2 & \text{if } y > 2 \\ x = 3 & \text{if } y \leq 2 \end{array} \right. \quad (61.2)$$

$$(61.3)$$

```

1 \begin{tabular}{rc}
2 \ldelim\{{\{2}\}{2.75cm}[some text here] &
3   \parbox{\linewidth-3cm-4\tabcolsep}{%
4     \vspace*{1ex}%
5     \begin{flalign}%
6       x &= 2\quad\text{if } y > 2 \quad&\\
7       x &= 3\quad\text{if } y \leq 2&%
8     \end{flalign}%
9   \end{parbox}%

```

$$\text{some text here} \left\{ \begin{array}{ll} x = 2 & \text{if } y > 2 \\ x = 3 & \text{if } y \leq 2 \end{array} \right. \quad (61.4)$$

$$(61.5)$$

```

1 \begin{tabularx}{\linewidth}{rXc}
2 \ldelim\{{\{2}\}{2.75cm}[some text here]
3   & $x=2$\quad\text{if } y>2\$ \&\refstepcounter{equation}(\theequation)\\
4   & $x=3$\quad\text{if } y\leq 2\$ \&\refstepcounter{equation}(\theequation)\\
5 \end{tabularx}

```

$$\text{some text here} \left\{ \begin{array}{ll} x = 2 & \text{if } y > 2 \\ x = 3 & \text{if } y \leq 2 \end{array} \right. \quad (61.6)$$

$$(61.7)$$

```

1 [
2 \begin{array}{rc@{\qquad}c}
3 \ldelim\{{\{2}\}{2.75cm}[some text here]
4   & x = 2\quad\text{if } y > 2 \quad& \refstepcounter{equation}(\theequation)\\
5   & x = 3\quad\text{if } y \leq 2& \refstepcounter{equation}(\theequation)\\
6 \end{array}
7 ]

```

62 Arrays

There is a general rule that a lot of mathematical stuff should be divided in smaller pieces. But sometimes it is difficult to get a nice horizontal alignment when splitting a formula. The following ones uses the `array` environment to get a proper alignment.

62.1 Quadratic equation

$$\begin{aligned}
 y &= x^2 + bx + c \\
 &= x^2 + 2 \cdot \frac{b}{2}x + c \\
 &= \underbrace{x^2 + 2 \cdot \frac{b}{2}x + \left(\frac{b}{2}\right)^2}_{\left(x + \frac{b}{2}\right)^2} - \left(\frac{b}{2}\right)^2 + c \\
 &= \left(x + \frac{b}{2}\right)^2 - \left(\frac{b}{2}\right)^2 + c \quad \left| + \left(\frac{b}{2}\right)^2 - c \right. \\
 y + \left(\frac{b}{2}\right)^2 - c &= \left(x + \frac{b}{2}\right)^2 \quad |(\text{Scheitelpunktform}) \\
 y - y_S &= (x - x_S)^2 \\
 S(x_S; y_S) \quad \text{bzw.} \quad S\left(-\frac{b}{2}; \left(\frac{b}{2}\right)^2 - c\right)
 \end{aligned} \tag{62.1}$$

```

1 \begin{equation}
2 \begin{array}{lcl}
3 y &=& x^{2}+bx+c \\
4 &=& x^{2}+2\cdot \cancel{bx+c} \\
5 &=& \cancel{x^{2}+2\cdot \cancel{bx+c}}+\left(\frac{b}{2}\right)^2-\left(\frac{b}{2}\right)^2+c \\
6 && \left(x+\frac{b}{2}\right)^2-\left(\frac{b}{2}\right)^2+c \\
7 &=& \left(x+\frac{b}{2}\right)^2 \\
8 y-y_S &=& (x-x_S)^2 \\
9 S(x_S; y_S) &\quad \text{bzw.} \quad S\left(-\frac{b}{2}; \left(\frac{b}{2}\right)^2-c\right) \\
10 && |(\text{Scheitelpunktform}) \\
11 y+\left(\frac{b}{2}\right)^2-c &=& \left(x+\frac{b}{2}\right)^2+c \\
12 && \left(x+\frac{b}{2}\right)^2+c-\left(\frac{b}{2}\right)^2-c \\
13 y-y_S &=& (x-x_S)^2 \\
14 S(x_S; y_S) &\quad \& \quad \text{bzw.} \quad S\left(-\frac{b}{2}; \left(\frac{b}{2}\right)^2-c\right) \\
15 && |(\text{Scheitelpunktform}) \\
16 \end{array} \\
17 \end{equation}

```

62.2 Vectors and matrices

$$\begin{aligned}
 \underline{RS} &= \begin{pmatrix} 01 & a4 & 55 & 87 & 5a & 58 & db & 9e \\ a4 & 56 & 82 & f3 & 1e & c6 & 68 & e5 \\ 02 & a1 & fc & c1 & 47 & ae & 3d & 19 \\ a4 & 55 & 87 & 5a & 58 & db & 9e & 03 \end{pmatrix} \\
 \begin{pmatrix} s_{i,0} \\ s_{i,1} \\ s_{i,2} \\ s_{i,3} \end{pmatrix} &= \underline{RS} \cdot \begin{pmatrix} m_{8i+0} \\ m_{8i+1} \\ \dots \\ m_{8i+6} \\ m_{8i+7} \end{pmatrix} \\
 S_i &= \sum_{j=0}^3 s_{i,j} \cdot 2^{8j} \quad i = 0, 1, \dots, k-1 \\
 S &= (S_{k-1}, S_{k-2}, \dots, S_1, S_0)
 \end{aligned} \tag{62.2}$$

```

1 \begin{equation}
2 \begin{array}{rcl}
3 \underline{RS} &=& \left( \begin{array}{ccccccc} 01 & a4 & 55 & 87 & 5a & 58 & db & 9e \\ a4 & 56 & 82 & f3 & 1e & c6 & 68 & e5 \\ 02 & a1 & fc & c1 & 47 & ae & 3d & 19 \\ a4 & 55 & 87 & 5a & 58 & db & 9e & 03 \end{array} \right) \\
4 && \\
5 && \\
6 && \\
7 && \\
8 && \\
9 \left( \begin{array}{c} s_{i,0} \\ s_{i,1} \\ s_{i,2} \\ s_{i,3} \end{array} \right) &=& \underline{RS} \cdot \left( \begin{array}{c} m_{8i+0} \\ m_{8i+1} \\ \dots \\ m_{8i+6} \\ m_{8i+7} \end{array} \right) \\
10 && \\
11 && \\
12 && \\
13 && \\
14 && \\
15 && \\
16 && \\
17 && \\
18 && \\
19 && \\
20 && \\
21 && \\
22 && \\
23 && \\
24 && \\
25 && \\
26 && \\
27 &&
\end{array} \right) \\
&& \\
S_i &=& \sum_{j=0}^3 s_{i,j} \cdot 2^{8j} \quad i = 0, 1, \dots, k-1 \\
S &=& (S_{k-1}, S_{k-2}, \dots, S_1, S_0)
\end{array} \tag{62.2}
```

62.3 Cases with (eqn)array environment

This solution is important when $\mathcal{AM}\mathcal{S}\text{math}$ can't be used.

$$\lim_{n \rightarrow \infty} q^n = \begin{cases} \text{divergent} & q \leq -1 \\ 0 & |q| < 1 \\ 1 & q = 1 \\ \infty & q > 1 \end{cases}$$

```

1 $\lim\limits_{n\rightarrow\infty}q^n=\left\{\begin{array}{ll}
2 \text{divergent} & q\leq-1\\
3 0 & |q|<1\\
4 1 & q=1\\
5 \infty & q>1\\
6 \end{array}\right.\right.$
7 
```

62.4 Arrays inside arrays

The array environment is a powerful one because it can be nested in several ways:

$$\left(\begin{array}{cc|cc} a_{11} & a_{12} & & 0 \\ a_{21} & a_{22} & & 0 \\ \hline & & 0 & \begin{array}{ccc} b_{11} & b_{12} & b_{13} \\ b_{21} & b_{22} & b_{23} \\ b_{31} & b_{32} & b_{33} \end{array} \\ & & 0 & 0 \\ \hline & & & \begin{array}{cc} c_{11} & c_{12} \\ c_{21} & c_{22} \end{array} \end{array} \right)$$

```

1 \[
2 \left(
3 \begin{array}{c|cc}
4 \begin{array}{c|cc}
5 \begin{array}{c|cc}
6 a_{11} & a_{12} & \\
7 a_{21} & a_{22} & \\\hline
8 & & 0 \\
9 & & \begin{array}{ccc} b_{11} & b_{12} & b_{13} \\ b_{21} & b_{22} & b_{23} \\ b_{31} & b_{32} & b_{33} \end{array} \\
10 & & 0 \\
11 & & \\\hline
12 & & \begin{array}{cc} c_{11} & c_{12} \\ c_{21} & c_{22} \end{array} \end{array} \right) \\
13 \end{array} \right) \\
14 \right) \\
15 \right) \\
16 \right) \\
17 \right) \\
18 \right) \\
19 \right) \\
20 \right) \\
21 \right] 
```

$$Y^1 = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 1 \\ \hline 2 & 1 & 3 & 1 \end{bmatrix}$$

```

1  \[
2  Y^1=
3  \begin{array}{c}
4    \null\\[1ex] % only vor vertical alignment
5    \left[\begin{array}{rrrr}
6      0 & 0 & 1 & 0 \\
7      1 & 0 & 1 & 0 \\
8      1 & 1 & 1 & 1 \\
9    \end{array}\right]\\[3ex]\hline
10   \begin{array}{rrrr}
11     \dotsfor{4}\\%(\ needs \AmSmath) instead of \\[3ex]\hline
12     2 & 1 & 3 & 1 \\
13   \end{array}
14 \end{array}
15 \]

```

62.5 Colored cells

In general there is no difference in coloring tabular or array cells. The following example shows how one can put colors in rows, columns and cells.

$$\left[\begin{array}{ccccc} h_{k,1,0}(n) & h_{k,1,1}(n) & h_{k,1,2}(n) & 0 & 0 \\ h_{k,2,0}(n) & h_{k,2,1}(n) & h_{k,2,2}(n) & 0 & 0 \\ h_{k,3,0}(n) & h_{k,3,1}(n) & h_{k,3,2}(n) & 0 & 0 \\ h_{k,4,0}(n) & h_{k,4,1}(n) & h_{k,4,2}(n) & 0 & 0 \\ 0 & h_{k,1,0}(n-1) & h_{k,1,1}(n-1) & h_{k,1,2}(n-1) & 0 \\ 0 & h_{k,2,0}(n-1) & h_{k,2,1}(n-1) & h_{k,2,2}(n-1) & 0 \\ 0 & h_{k,3,0}(n-1) & h_{k,3,1}(n-1) & h_{k,3,2}(n-1) & 0 \\ 0 & h_{k,4,0}(n-1) & h_{k,4,1}(n-1) & h_{k,4,2}(n-1) & 0 \\ 0 & 0 & h_{k,1,0}(n-2) & h_{k,1,1}(n-2) & h_{k,1,2}(n-2) \\ 0 & 0 & h_{k,2,0}(n-2) & h_{k,2,1}(n-2) & h_{k,2,2}(n-2) \\ 0 & 0 & h_{k,3,0}(n-2) & h_{k,3,1}(n-2) & h_{k,3,2}(n-2) \\ 0 & 0 & h_{k,4,0}(n-2) & h_{k,4,1}(n-2) & h_{k,4,2}(n-2) \end{array} \right]_{12 \times 5}$$

```

1 ...
2 \usepackage{array}
3 \usepackage{colortbl}
4 \definecolor{umbra}{rgb}{0.8,0.8,0.5}
5 \def\zero{\multicolumn{1}{>{\columncolor{white}}c}{0}}
6 \def\colCell#1#2{\multicolumn{1}{>{\columncolor{#1}}c}{#2}}

```

```

7 \begin{document}
8 \[\left[ \begin{array}{*{5}{c}} & & & & \\ \hline
9 h_{\{k,1,0\}}(n) & h_{\{k,1,1\}}(n) & h_{\{k,1,2\}}(n) & \text{\zero} & \text{\zero} \\ \hline
10 h_{\{k,2,0\}}(n) & h_{\{k,2,1\}}(n) & h_{\{k,2,2\}}(n) & \text{\zero} & \text{\zero} \\ \hline
11 h_{\{k,3,0\}}(n) & h_{\{k,3,1\}}(n) & h_{\{k,3,2\}}(n) & \text{\zero} & \text{\zero} \\ \hline
12 h_{\{k,4,0\}}(n) & \text{\colCell{umbra}{h_{\{k,4,1\}}(n)}} & h_{\{k,4,2\}}(n) & \text{\zero} & \text{\zero} \\ \hline
13 & \text{\zero} & \text{\zero} & \text{\zero} & \text{\zero} \\ \hline
14 \text{\zero} & h_{\{k,1,0\}}(n-1) & h_{\{k,1,1\}}(n-1) & h_{\{k,1,2\}}(n-1) & \text{\zero} \\ \hline
15 \text{\zero} & h_{\{k,2,0\}}(n-1) & h_{\{k,2,1\}}(n-1) & h_{\{k,2,2\}}(n-1) & \text{\zero} \\ \hline
16 \text{\zero} & h_{\{k,3,0\}}(n-1) & h_{\{k,3,1\}}(n-1) & h_{\{k,3,2\}}(n-1) & \text{\zero} \\ \hline
17 \text{\zero} & \text{\colCell{umbra}{h_{\{k,4,0\}}(n-1)}} & h_{\{k,4,1\}}(n-1) & h_{\{k,4,2\}}(n-1) & \text{\zero} \\ \hline
18 \text{\zero} & \text{\zero} & h_{\{k,1,0\}}(n-2) & h_{\{k,1,1\}}(n-2) & h_{\{k,1,2\}}(n-2) \\ \hline
19 \text{\zero} & \text{\zero} & h_{\{k,2,0\}}(n-2) & h_{\{k,2,1\}}(n-2) & h_{\{k,2,2\}}(n-2) \\ \hline
20 \text{\zero} & \text{\zero} & h_{\{k,3,0\}}(n-2) & h_{\{k,3,1\}}(n-2) & h_{\{k,3,2\}}(n-2) \\ \hline
21 \text{\zero} & \text{\zero} & h_{\{k,4,0\}}(n-2) & h_{\{k,4,1\}}(n-2) & h_{\{k,4,2\}}(n-2) \\ \hline
22 \end{array} \right] \times 5 \]
23 ...

```

62.6 Boxed rows and columns

$$\overrightarrow{A} = \left[\begin{array}{cccc} 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ \boxed{1 & 2 & 3 & 4} \\ 1 & 2 & 3 & 4 \end{array} \right]$$

```

1 \[
2 \overrightarrow{A}=\left[ \begin{array}{cccc} & & & \\ \hline
3 & 1 & 2 & 3 & 4 \\ \hline
4 & 1 & 2 & 3 & 4 \\ \hline
5 & \multicolumn{1}{|c}{1} & \multicolumn{4}{c}{} \\ \hline
6 & \multicolumn{1}{c}{1} & \multicolumn{3}{c}{2} & 3 & 4 \\ \hline
7 & \multicolumn{1}{c}{1} & \multicolumn{4}{c}{} \\ \hline
8 & 1 & 2 & 3 & 4 \\ \hline
9 \end{array} \right]
10 \]

```

$$\overrightarrow{A} = \left[\begin{array}{cc|cc} 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \end{array} \right]$$

```

1 \[
2 \overrightarrow{A}=\left[ \begin{array}{cc|cc} & & & \\ \hline
3 & 1 & 2 & 3 & 4 \\ \hline
4 & 1 & 2 & 3 & 4 \\ \hline
5 & 1 & 2 & 3 & 4 \\ \hline
6 & 1 & 2 & 3 & 4 \\ \hline
7 & \cline{3-3} \\ \hline
8 \end{array} \right]
9 \]

```

$$\overrightarrow{A} = \left[\begin{array}{cc|cc} 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ \boxed{1 & 2 & 3 & 4} \\ 1 & 2 & 3 & 4 \end{array} \right]$$

```

1 \[
2 \overrightarrow{A}=\left[ \begin{array}{cc|cc} & & & \\ \hline
3 & 1 & 2 & 3 & 4 \\ \hline
4 & 1 & 2 & 3 & 4 \\ \hline
5 & \multicolumn{1}{|c}{1} & \multicolumn{4}{c}{} \\ \hline
6 & \multicolumn{1}{c}{1} & \multicolumn{3}{c}{2} & 3 & 4 \\ \hline
7 & \multicolumn{1}{c}{1} & \multicolumn{4}{c}{} \\ \hline
8 & 1 & 2 & 3 & 4 \\ \hline
9 & \cline{3-3} \\ \hline
10 \end{array} \right]

```

63 Over- and underbraces

63.1 Braces and roots

To put an underbrace in a root without enlarging the root symbol is possible with the `\makebox` macro:


$$z = \sqrt{\underbrace{x^2 + y^2}_{=z^2}}$$

```

1 \[
2 z =\; ;\; \underbrace{%
3   \makebox[\widthof{$x^2+y^2$}][r]{%
4     $\sqrt{x^2+y^2}$}}_{=z^2}
5 \]

```

63.2 Overlapping braces

Overlapping under- and overbraces like  needs some

tricky code, because we cannot have parts of the argument inside `overbrace` and also `underbrace`. The following equation 63.1 is an example for such a construction:

$$\begin{aligned}
y &= 2x^2 - 3x + 5 \\
&= 2 \left(\underbrace{x^2 - \frac{3}{2}x}_{\text{red}} + \overbrace{\left(\frac{3}{4} \right)^2 - \left(\frac{3}{4} \right)^2}^{=0} + \frac{5}{2} \right) \\
&= 2 \left(\left(x - \frac{3}{4} \right)^2 + \frac{31}{16} \right) \\
y - \frac{31}{8} &= 2 \left(x - \frac{3}{4} \right)^2
\end{aligned} \tag{63.1}$$

```

1 \begin{aligned}\label{eq: pqFormel}
2 y &= 2x^2 - 3x + 5 \nonumber \\
3 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
4 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
5 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
6 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
7 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
8 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5} \\
9 &\quad & \phantom{y=} \& \phantom{2x^2 - 3x + 5} \& \phantom{2x^2 - 3x + 5}
\end{aligned}

```

```

10 }%
11 \underbrace{%
12 - \left(\frac{3}{4}\right)^2 + \frac{5}{2}}%
13 \right) \\
14 &= 2\left(\qquad\textrm{color{red}}\left(\left(x-\frac{3}{4}\right)^2\right.\right. \\
15 \qquad + \left.\left.\frac{31}{16}\right)\qquad\right)\nonumber\\
16 y\textrm{color{blue}}\{-\frac{31}{8}\} \\
17 &= 2\left(x\textrm{color{cyan}}\{-\frac{3}{4}\}\right)^2\nonumber\\
18 \end{align}

```

63.3 Vertical alignment of different braces

When having several braces in one formula line, then it looks better when all braces are also on the same line, e.g.,

$$\begin{pmatrix} x_R \\ y_R \end{pmatrix} = \underbrace{r \cdot \begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Scaling}} \begin{pmatrix} x_K \\ y_K \end{pmatrix} + \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}} \quad (63.2)$$

```

1 \begin{equation}
2 \binom{x_R}{y_R} = \underbrace{r\vphantom{\binom{A}{B}}}_{\text{Skaling}}\cdot\cdots
3 \underbrace{%
4 \begin{pmatrix}
5 \sin \gamma & -\cos \gamma \\
6 \cos \gamma & \sin \gamma
7 \end{pmatrix}}_{\text{Rotation}}
8 \}_{\text{Rotation}}\binom{x_K}{y_K} +
9 \underbrace{\binom{t_x}{t_y}}_{\text{Translation}}
10
11 \end{equation}

```

It is again the `\vphantom` macro which reserves the needed vertical space. Nevertheless the horizontal space around the `r` of the first underbrace and the last `+` should be decreased to get a better typesetting. This is possible with `\hspace` or simply `\kern`:

$$\begin{pmatrix} x_R \\ y_R \end{pmatrix} = r \cdot \underbrace{\begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Skaling}} \begin{pmatrix} x_K \\ y_K \end{pmatrix} + \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}}$$

```

1 \[ \binom{x_R}{y_R} = %
2 \kern-10pt\underbrace{r\vphantom{\binom{A}{B}}}_{\text{Skaling}}\cdot\cdots
3 \kern-10pt\cdots\kern-10pt\%
4 \begin{pmatrix}
5 \sin \gamma & -\cos \gamma \\
6 \cos \gamma & \sin \gamma
7 \end{pmatrix}
8 \}_{\text{Rotation}}\binom{x_K}{y_K}

```

```

9 |   \binom{x_K}{y_K} +\kern-5pt%
10 |   \underbrace{\binom{t_x}{t_y}}_{\text{Translation}} \]

```

63.4 Vertical and horizontal alignment

The forgoing example simply uses `\hspace` to decrease the horizontal width between two underbraces. This may be okay for a single solution, but in general it is better to have some code which works in any case.

The following example looks simple but it needs some tricky code to get vertical and horizontal alignment.

$$\frac{300}{5069} \xrightarrow{} \frac{29}{490} \xrightarrow{} \frac{19}{321} \xrightarrow{} \frac{9}{152} \xrightarrow{} \frac{8}{135} \xrightarrow{} \dots \xrightarrow{} \frac{1}{16} \xrightarrow{} \dots \xrightarrow{} \frac{1}{1}$$

$\Delta a=271$ $\Delta a=10 =\langle 271 \rangle_{29}$ $\Delta a=1 =\langle 10 \rangle_9$ $\Delta a=0=\langle 1 \rangle_1$
 $\Delta b=4579$ $\Delta b=169=\langle 4579 \rangle_{490}$ $\Delta b=17=\langle 169 \rangle_{152}$ $\Delta b=1=\langle 17 \rangle_{16}$
 1 iteration 2 iterations 8 iterations 8 iterations

It uses the macro `\mathclap` defined in section 35.2 on page 73, which gives a better result. It is also possible to use `\makebox[0pt]{...}` but it works only in text mode and this needs some more \$...\$.

```

1 \def\num#1{\phantom{#1}}
2 \def\vsp{\vphantom{\rule{0pt}{1ex}}}
3
4 \begin{equation*}
5   \frac{300}{5069}%
6   \underbrace{\longmapsto\vphantom{\frac{1}{1}}}_{\mathclap{\substack{\Delta a=271\\ \Delta b=4579\\ 1\text{ iteration}}}}%
7   \frac{29}{490}%
8   \underbrace{\longmapsto \frac{19}{321}\longmapsto}_{\mathclap{\substack{\Delta a=10=\langle 271 \rangle_{29}\\ \Delta b=169=\langle 4579 \rangle_{490}\\ 2\text{ iterations}}}}%
9   \frac{19}{321}%
10  \underbrace{\longmapsto \frac{9}{152}\longmapsto}_{\mathclap{\substack{\Delta a=1=\langle 10 \rangle_9\\ \Delta b=17=\langle 169 \rangle_{152}\\ 8\text{ iterations}}}}%
11  \frac{9}{152}%
12  \underbrace{\longmapsto \frac{8}{135}\longmapsto}_{\mathclap{\substack{\Delta a=0=\langle 1 \rangle_1\\ \Delta b=1=\langle 17 \rangle_{16}\\ 8\text{ iterations}}}}%
13  \frac{8}{135}%
14  \dots
15  \frac{1}{16}%
16  \dots
17  \frac{1}{1}
18 \underbrace{\dots}_{\mathclap{\substack{\Delta a=1\text{ num}\{7\}=\langle 10 \rangle_{119}\\ \Delta b=17=\langle 169 \rangle_{152}\\ 8\text{ iterations}}}}%
19 \dots
20 \underbrace{\dots}_{\mathclap{\substack{\Delta a=0=\langle 1 \rangle_{76}\\ \Delta b=1=\langle 17 \rangle_{16}\\ 2\text{ iterations}}}}%
21
22
23
24
25
26
27

```

```

28     \text{\$8$ iterations}
29 } \frac{1}{1}
30 \end{equation*}
```

64 Integrals

The *first theorem of Green* is:

$$\iiint_{\mathcal{G}} [u\nabla^2 v + (\nabla u, \nabla v)] d^3V = \iint_S u \frac{\partial v}{\partial n} d^2A$$

The *second theorem of Green* is:

$$\iiint_{\mathcal{G}} [u\nabla^2 v - v\nabla^2 u] d^3V = \iint_S \left(u \frac{\partial v}{\partial n} - v \frac{\partial u}{\partial n} \right) d^2A$$

They are both written with the `esint` package³⁷, which gives nice integral symbols. The L^AT_EX code for the first equation is:

```

1 \[
2 \underset{\mathcal{G}}{\iint} \left[ u \nabla^2 v + \left( \nabla u, \nabla v \right) \right] d^3V
3 = \underset{\mathcal{S}}{\oint} \left( u \frac{\partial v}{\partial n} - v \frac{\partial u}{\partial n} \right) d^2A
4 \]
5 ]
```

with the following definition in the preamble for the partial derivation:

```

1 \def \Q#1#2{\frac{\partial #1}{\partial #2}}
```

which makes things easier to write.

65 Horizontal alignment

65.1 Over more than one page

Sometimes it may be useful to have a vertical alignment over the whole page with a mix of formulas and text. Section 37 shows the use of `\intertext`. There is another trick to get all formulas vertical aligned. Let's have the following formulas distributed over the whole page:

$$\begin{aligned} f(x) &= a \\ g(x) &= x_2 - 4x \\ f(x) - g(x) &= x_2 + x_3 + x \\ g &= x_2 + x_3 + x_4 + x_5 + b \end{aligned}$$

³⁷See section 64.

They all have a different length of the left and right side. Now we want to write some text and other objects between them, but let the alignment untouched. We choose the longest left and the longest right side and take them for scaling with the `\hphantom` command:

```
\hphantom{\mbox{$f(x)-g(x)$}} & \hphantom{\mbox{$= x^2+x^3+x^4+x^5+b$}}
```

This is the first (empty) line in every equation where now all other lines are aligned to this one. For example:

blah
blah blah blah blah blah blah blah blah

$$f(x) = a \tag{65.1}$$

$$g(x) = x^2 - 4x \tag{65.2}$$

blah
blah blah blah blah blah blah blah

$$f(x) - g(x) = x^2 + x^3 + x \tag{65.3}$$

blah
blah blah blah blah blah blah blah

$$g(x) = x^2 + x^3 + x^4 + x^5 + b \tag{65.4}$$

blah
blah blah blah blah blah blah

The phantom line is empty but leaves the vertical space for a line. This could be corrected with decreasing the `\abovedisplayshortskip` length and done all inside a group.

```

1 \newcommand{\x}{blah blah blah blah blah blah blah}
2 \bgroup
3 \addtolength\abovedisplayshortskip{-0.5cm} % decrease the skip
4 \addtolength\abovedisplayskip{-0.5cm}
5 \x\x\x
6 \begin{align}
7 \hphantom{\mbox{$f(x)-g(x)$}} & \hphantom{\mbox{$= x^2+x^3+x^4+x^5+b$}} \\
8 f(x) &= a \\
9 g(x) &= x^2-4x \\
10 \end{align}
11 %
12 \x\x\x

```

```

13 \begin{align}
14 \phantom{\boxed{f(x)-g(x)}} & \phantom{=} \boxed{x^2+x^3+x^4+x^5+b} \\
15 f(x)-g(x) &= x^2+x^3+x \\
16 \end{align}
17 \times\mkern-13mu\times
18 %
19 \begin{align}
20 \phantom{\boxed{f(x)-g(x)}} & \phantom{=} \boxed{x^2+x^3+x^4+x^5+b} \\
21 g(x) &= x^2+x^3+x^4+x^5+b \\
22 \end{align}
23 \times\mkern-13mu\times
24 \egroup

```

Another case of aligning equations inside an itemize environment is the following one. With the `\makebox` macro one can have the same size on the left side of the equal sign to get a vertical alignment.

- first function

$$P_1 = \sum_a \in A$$

- but another one

$$\sin(P_1) = blabla$$

- or perhaps

$$P_3 + P_2 - P_1 = blablu$$

```

1 \newsavebox\lW
2 \sbox\lW{$P_{\{3\}}+P_{\{2\}}-P_{\{1\}}$}
3
4 \begin{itemize}
5 \item first function \\
6 $ \displaystyle \makebox[\wd\lW][r]{$P_{\{1\}}$} = \sum_a \in A $ \\
7 \item but another one \\
8 $ \makebox[\wd\lW][r]{$\sin\left(P_{\{1\}}\right)$} = blabla $ \\
9 \item or perhaps \\
10 $ P_{\{3\}}+P_{\{2\}}-P_{\{1\}} = blablu $ \\
11 \end{itemize}

```

65.2 Special text columns

This one comes from Hartmut Henkel and offers a special form of placing additional text between the equation and the equation number. This makes only sense when you load the documentclass with the option `fleqn`. The example places the additional text at `0.5\textwidth`, changing this value is no problem.

text
 text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text
 text text text text

$$\varepsilon = \frac{E \cdot 4 \cdot \pi \cdot \varepsilon_0 \cdot a_0 \cdot \left(Z_i^{\frac{2}{3}} + Z_{Si}^{\frac{2}{3}} \right)^{-\frac{1}{2}}}{Z_i \cdot Z_{Si} \cdot e^2 \cdot \left(1 + \frac{m_i}{m_{Si}} \right)}; \quad \begin{array}{ll} a_0 & \text{Bohrscher Radius } (= 0,53 \text{ \AA}) \\ e & \text{Elementarladung} \\ N_{si} & \text{Anzahl der Siliziumatome} \\ m & \text{Atomgewicht} \\ Z & \text{Kernladungszahl} \end{array} \quad (65.5)$$

$$a2 + b2 = c2 \quad \text{abc} \quad (65.6)$$

$$z = 9 \quad (65.7)$$

text
 text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text
 text text text text

This solution works only with *AMSmath*, without you have to redefine the *LATEX* macro, which creates the equation number.

```

1 \newsavebox{\myendhook} % for the tabulars
2 \def\tagform@#1{{(\maketag@@@{\ignorespaces#1\unskip\@@italiccorr})}
3   \makebox[0pt][r]{% after the equation number
4     \makebox[0.4\textwidth][l]{\usebox{\myendhook}}}%
5 }
6 \global\sbox{\myendhook}{}% clear box content
7 }
8 [ ... ]
9 \sbox{\myendhook}%
10 \begin{footnotesize}%
11 \begin{tabular}{@{}l}
12 $a_0$ & Bohrscher Radius ($\mathbf{\mathit{a}_0} = 0,53 \text{ \AA}$) \\
13 $e$ & Elementarladung \\
14 $N_{si}$ & Anzahl der Siliziumatome \\
15 & pro Einheitsvolumen \\
16 $m$ & Atomgewicht \\
17 $Z$ & Kernladungszahl
18 \end{tabular}
19 \end{footnotesize}%
20 %
21 \begin{equation}
22 \varepsilon = \frac{E \cdot 4 \cdot \pi \cdot \varepsilon_0 \cdot a_0 \cdot \left( Z_i^{\frac{2}{3}} + Z_{Si}^{\frac{2}{3}} \right)^{-\frac{1}{2}}}{Z_i \cdot Z_{Si} \cdot e^2 \cdot \left( 1 + \frac{m_i}{m_{Si}} \right)}
23 \end{equation}
24 
```

```

25 + \frac{m_i}{m_{Si}} \right)\} \;, \\
26 \end{equation}
27 %
28 \sbox{\myendhook}{abc}
29 %
30 \begin{equation} a_2+b_2=c_2 \end{equation}
31 %
32 \begin{equation} z = 9 \end{equation}

```

65.3 Centered vertical dots

By default the vertical dots of `\vdots` are aligned to the left of the `=` symbol and not centered.

$$a_1 = b_1 \quad c_1 = d_1 \quad (65.8)$$

$$a_2 = b_2 \quad c_2 = d_2 \quad (65.9)$$

$$\begin{array}{cc} a : b & \vdots \\ a_n = b_n & c_n = d_n \end{array} \quad (65.10)$$

```

1 \usepackage{amsmath}
2 ...
3
4 \newsavebox{\eqbox}
5 \sbox{\eqbox}{$\null=\null$}
6 \newcommand{\Vdots}{\makebox[\wd\eqbox]{\vdots}}
7
8 \begin{align}
9   a_1 &= b_1 & c_1 &= d_1 \\
10  a_2 &= b_2 & c_2 &= d_2 \\
11  a &\Vdots b & c &\Vdots \nonumber \\
12  a_n &= b_n & c_n &= d_n
13 \end{align}

```

66 Node connections

This is a typical application for PStricks and it needs the package `pst-node` and doesn't work with `pdflatex`. Use `vlatex`, `ps4pdf` or `ps2pdf`.

Die Bindungsenergie im Tröpfchenmodell setzt sich aus folgenden Teilen zusammen:

- dem Oberflächenanteil
 - dem Volumenanteil,
 - dem Coulomb-Anteil
 - der Symmetrienergie
 - sowie einem Paarbildungsbeitrag.
- $$E = a_v A + -a_f A^{2/3} + -a_c \frac{Z(Z-1)}{A^{1/3}} + -a_s \frac{(A-2Z)^2}{A} + E_p \quad (1)$$

```

1 \psset{nodesep=3pt}
2 \definecolor{lila}{rgb}{0.6,0.2,0.5}
3 \definecolor{darkyellow}{rgb}{1,0.9,0}
4 Die Bindungsenergie im Tröpfchenmodell setzt sich aus
5 folgenden Teilen zusammen:
6 \begin{itemize}
7 \item dem \rnode{b}{Oberfl\"achenanteil}
8 \item dem \rnode{a}{Volumenanteil},\\[1cm]
9 \def\xstrut{\vphantom{\frac{(A)^1}{(B)^1}}}
10 \begin{equation}
11 E =
12 \rnode[t]{ae}{\psframebox*[fillcolor=darkyellow,
13 linestyle=none]{\xstrut a_VA}} +
14 \rnode[t]{be}{\psframebox*[fillcolor=lightgray,
15 linestyle=none]{\xstrut -a_fA^{2/3}}} +
16 \rnode[t]{ce}{\psframebox*[fillcolor=green,
17 linestyle=none]{\xstrut -a_c\frac{Z(Z-1)}{A^{1/3}}}} +
18 \rnode[t]{de}{\psframebox*[fillcolor=cyan,
19 linestyle=none]{\xstrut -a_s\frac{(A-2Z)^2}{A}}} +
20 \rnode[t]{ee}{\psframebox*[fillcolor=yellow,
21 linestyle=none]{\xstrut E_p}}
22 \end{equation}\\[0.25cm]
23 \item dem \rnode{c}{Coulomb-Anteil}
24 \item der \rnode{d}{Symmetrienergie}
25 \item sowie einem \rnode{e}{Paarbildungsbeitrag}.
26 \end{itemize}
27 \nccurve[angleA=-90,angleB=90]{->}{a}{ae}
28 \nccurve[angleB=45]{->}{b}{be} \nccurve[angleB=-90]{->}{c}{ce}
29 \nccurve[angleB=-90]{->}{d}{de} \nccurve[angleB=-90]{->}{e}{ee}
```

67 Special placement of displayed equations

67.1 Formulas side by side

Sometimes it may be useful to have numbered formulas side by side like the following ones:

$$\oint E ds = 0 \quad (67.1.a)$$

$$a = \frac{c}{d} \quad (67.2.a)$$

$$c = 1 \quad (67.3.a)$$

$$\nabla \cdot B = 0 \quad (67.1.b)$$

$$b = 1 \quad (67.2.b)$$

$$\int 2x dx = x^2 + C \quad (67.3.b)$$

And again a default display equation:

$$F(x) = \int_0^\infty \frac{1}{x} dx \quad (67.4)$$

```

1 \begin{mtable}[*]{m{0.35\linewidth}m{0.15\linewidth}}
2 \begin{align*} \oint E ds=0 \end{align*} & \eqnCnt % \\
3 & \begin{align*} \nabla \cdot B=0 \end{align*} & \eqnCnt[\label{blah}]\\
4 \begin{align*} a = \frac{c}{d} \end{align*} & \eqnCnt % \\
5 & \begin{align*} b = 1 \end{align*} & \eqnCnt\\
6 \begin{align*} c = 1 \end{align*} & \eqnCnt[\label{blub}] \\
7 & \begin{align*} \int 2x , \mathbf{mathrm{d}}x = x^2+C \end{align*} & \eqnCnt \\
8 \end{mtable}

```

The new environment `mtable` has two arguments, one optional and one which is the same as the one from the `tabular` environment. With the option `long` it is possible to have all the formulas in a `longtable` environment, which allows a pagebreak. The new macro `\eqnCnt` controls the counting of these equations as subequations for one tabular line. This macro can have an optional argument for a label. At least it counts the equations. If the equation number is not centered to the foregoing equation, then it needs some more horizontal space in the tabular column.

`\eqnCnt[<optional label>]`

The vertical space is controlled by the length `mtableskip`, which is by default `-1.25cm` and can be modified in the usual way. To define all these macros write into the preamble:

```

1 \usepackage{amsmath}
2 \newcounter{subequation}

```

```

3 | \newlength{\mtabskip}\mtabskip=-1.25cm
4 | \newcommand{\eqnCnt}[1][]{%
5 |   \refstepcounter{subequation}%
6 |   \begin{align}\#1\end{align}%
7 |   \addtocounter{equation}{-1}%
8 | \def\mtabLong{long}%
9 | \makeatletter%
10| \newenvironment{mtabular}[2][\empty]{%
11|   \def\@xarraycr{%
12|     \stepcounter{equation}%
13|     \setcounter{subequation}{0}%
14|     \@ifnextchar[\@argarraycr[\@argarraycr[\mtabskip]]}%
15|     \let\theoldequation\theequation%
16|     \renewcommand\theequation{\theoldequation.\alph{subequation}}%
17|     \edef\mtabOption{\#1}%
18|     \setcounter{subequation}{0}%
19|     \tabcolsep=0pt%
20|     \ifx\mtabOption\mtabLong\longtable{\#2}\else\tabular{\#2}\fi%
21|   }%
22|   \ifx\mtabOption\mtabLong\endlongtable\else\endtabular\fi%
23|   \let\theequation\theoldequation%
24|   \stepcounter{equation}%
25| \makeatother%

```

As seen in equation 67.3.a and equation 67.1.b, everything of the table contents is nonsense ... And the following tabular is defined as a longtable to enable pagebreaks.

$$\oint Eds = 0 \quad (67.5.a) \qquad \nabla \cdot B = 0 \quad (67.5.b)$$

$$a = \frac{c}{d} \quad (67.6.a) \qquad b = 1 \quad (67.6.b)$$

$$c = 1 \quad (67.7.a) \qquad \int 2x \, dx = x^2 + C \quad (67.7.b)$$

$$\oint Eds = 0 \quad (67.8.a) \qquad \nabla \cdot B = 0 \quad (67.8.b)$$

$$a = \frac{c}{d} \quad (67.9.a) \qquad b = 1 \quad (67.9.b)$$

$$c = 1 \quad (67.10.a) \qquad \int 2x \, dx = x^2 + C \quad (67.10.b)$$

$$\oint Eds = 0 \quad (67.11.a) \qquad \nabla \cdot B = 0 \quad (67.11.b)$$

$$a = \frac{c}{d} \quad (67.12.a) \qquad b = 1 \quad (67.12.b)$$

$$c = 1 \quad (67.13.a) \quad \int 2x \, dx = x^2 + C \quad (67.13.b)$$

$$\oint E ds = 0 \quad (67.14.a) \quad \nabla \cdot B = 0 \quad (67.14.b)$$

$$a = \frac{c}{d} \quad (67.15.a) \quad b = 1 \quad (67.15.b)$$

$$c = 1 \quad (67.16.a) \quad \int 2x \, dx = x^2 + C \quad (67.16.b)$$

As seen in equation 67.13.a and equation 67.11.b, everything is nonsense

...

And again a default display equation:

$$F(x) = \int_0^\infty \frac{1}{x} \, dx \quad (67.17)$$

```

1 \begin{mtable}[long]{*{2}{m{0.375\ linewidth}m{0.125\ linewidth}}}
2 \begin{align*} \oint E \, ds = 0 \end{align*} & \eqnCnt \% \\
3 & \begin{align*} \nabla \cdot B = 0 \end{align*} & \eqnCnt \\ 
4 \begin{align*} a = \frac{c}{d} \end{align*} & \eqnCnt \% \\
5 & \begin{align*} b = 1 \end{align*} & \eqnCnt \\ 
6 \begin{align*} c = 1 \end{align*} & \eqnCnt \% \\
7 & \begin{align*} \int 2x \, , \mathbf{d}x = x^2 + C \end{align*} & \eqnCnt \\ 
8 & \dots ] 
9 
```

67.2 Formulas inside an itemize environment

Without any modification it is not possible to get a numbered equation at the same height as the symbol of the itemize environment. This depends on the `\abovedisplayskip`. The formula has to be raised up for exactly this length.

```

1 \def\itemMath#1{%
2   \raisebox{-\abovedisplayskip}{%
3     \parbox{0.75\ linewidth}{%
4       \begin{equation}#1\end{equation}}}%
5 %
6 \begin{itemize}
7 \item \itemMath{ f = 1 }
8 \item \itemMath{ g(x) = \int f(x) \, , \mathbf{d}x }
9 \end{itemize}

```

$$\bullet \quad f = l \quad (67.18)$$

$$\bullet \quad g(x) = \int f(x) dx \quad (67.19)$$

68 Roots

There exists no special symbol for roots which are longer than one line. In such cases the root should be split into two or more one, like $\sqrt{a \cdot b \cdot c} = \sqrt{a} \cdot \sqrt{b} \cdot \sqrt{c}$ if possible. If nothing helps one can use `\overline` for following lines of the root. The following example uses the `multiline` environment to get only one equation number:

$$d(P, Q)|_{Stat., Dependent} = \sqrt{[a_{11}(x_1 - y_1)^2 + a_{22}(x_2 - y_2)^2 + \dots + a_{pp}(x_p - y_p)^2] + \overline{[2a_{12}(x_1 - y_1)(x_2 - y_2) + 2a_{13}(x_1 - y_1)(x_3 - y_3) + \dots + 2a_{p-1,p}(x_{p-1} - y_{p-1})(x_p - y_p)]}} \quad (68.1)$$

```

1 \begin{multiline}
2 d(P,Q)|_{Stat.,Dependent}=\\
3   \sqrt{\left[a_{11}(x_{1}-y_{1})^{2}+a_{22}(x_{2}-y_{2})^{2}+\dots+a_{pp}(x_{p}-y_{p})^{2}\right]+
4     \overline{\left[2a_{12}(x_{1}-y_{1})(x_{2}-y_{2})+2a_{13}(x_{1}-y_{1})(x_{3}-y_{3})+\right.}\\
5     \overline{\left.\dots+2a_{p-1,p}(x_{p-1}-y_{p-1})(x_{p}-y_{p})\right]}} \quad (68.1)
6 \end{multiline}

```

Alternative:

$$d(P, Q)|_{Stat., Dependent} = \left([a_{11}(x_1 - y_1)^2 + a_{22}(x_2 - y_2)^2 + \dots + a_{pp}(x_p - y_p)^2] + \overline{[2a_{12}(x_1 - y_1)(x_2 - y_2) + 2a_{13}(x_1 - y_1)(x_3 - y_3) + \dots + 2a_{p-1,p}(x_{p-1} - y_{p-1})(x_p - y_p)]} \right)^{1/2} \quad (68.2)$$

```

1 \begin{multiline}
2 d(P,Q) |_{Stat.,Dependent} = \\
3   \left[ a_{11}(x_{1}-y_{1})^{2}+a_{22}(x_{2}-y_{2})^{2}+
4     \ldots+a_{pp}(x_p-y_p)^2\right] + \\
5   \left[ 2a_{12}(x_1-y_1)(x_2-y_2)+2a_{13} \cdot
6     (x_1-y_1)(x_3-y_3) + \ldots \right. \\
7   \left. \left. +2a_{p-1,p}(x_{p-1}-y_{p-1})(x_p-y_p)\right] \right]^{1/2}
8 \end{multiline}

```

Part VIII

Lists, bibliography and index

List of Figures

Figure	Page
1 <code>multiline</code> Alignment demo (the fourth row is shifted to the right with <code>\shoveright</code>)	60
2 Demonstration of <code>\multlinegap</code> (default is 0pt)	60

List of Tables

Table	Page
1 Meaning of \mathsurround	13
2 Difference between the default \bigg and the \biggm command	28
3 Use of the different parentheses for the “big” commands	28
4 Old font style commands	32
5 Fonts in math mode	32
6 The meaning of the math spaces	33
7 Spaces in math mode	34
8 Math styles	38
9 Dots in math mode	39
10 Accents in math mode	40
11 Vectors with package esvec	42
12 The predefined operators of fontmath.ltx	43
13 The predefined operators of latex.ltx	44
14 The greek letters	45
15 Comparison between the different align environments	51
16 Matrix environments	65
17 binom commands	69
18 The modulo commands and their meaning	70
19 Different mathcommands	80
20 The predefined operators of amsopn.sty	99
21 Predefined math symbols from fontmath.ltx	114
22 New symbols in combination with the equal sign	116

References

- [1] Paul W. Abrahams, Karl Berry, and Kathryn Hargreaves. *T_EX for the Impatient*. <http://tug.org/ftp/tex/impatient/book.pdf>, 2003.
- [2] Claudio Beccari. Typesetting mathematics for science and technology according to iso 31/xi. *TUGboat Journal*, 18(1):39–47, 1997.
- [3] Thierry Bouche. Diversity in math fonts. *TUGboat Journal*, 19(2):121–135, 1998.
- [4] David Cobac. *Atelier documents mathématiques*. <http://dcobac.free.fr/latex/Presentation4.pdf>, 2004.
- [5] David Cobac. *Ecrire des mathématiques avec L^AT_EX*. <http://dcobac.free.fr/latex/prepDocMaths.pdf>, 2004.
- [6] Michael Downes. *Technical Notes on the amsmath package*. American Mathematical Society, <ftp://ftp.ams.org/pub/tex/doc/amsmath/technote.pdf>, 1999.
- [7] Michael Downes. *Short Math Guide for L^AT_EX*. American Mathematical Society, <http://www.ams.org/tex/short-math-guide.html>, 2002.
- [8] Victor Eijkhout. *T_EX by Topic*. <http://www.eijkhout.net/tbt/>, 1992.
- [9] J. Anthony Fitzgerald. *Web Math Formulas Using T_EX*. <http://www.unb.ca/web/Sample/math/>, 1997.
- [10] Michel Goosens, Frank Mittelbach, and Alexander Samarin. *The L^AT_EX Companion*. Addison Wesley, 13 edition, 1994.
- [11] George Grätzer. *Math into L^AT_EX*. Birkhäuser Boston, third edition, 2000.
- [12] Donald E. Knuth. *The T_EXbook*. Addison Wesley Professional, 21 edition, 1986.
- [13] Donald E. Knuth, Tracy Larrabee, and Paul M. Roberts. *Mathematical Writing*. Stanford University, Computer Science Department, <http://sunburn.stanford.edu/~knuth/papers/mathwriting.tex.gz>, 1987.
- [14] R. Kuhn, R. Scott, and L. Andreev. *An Introduction to using L^AT_EX in the Harvard Mathematics Department*. Harvard University, Department of Mathematics, <http://abel.math.harvard.edu/computing/latex/manual/texman.html>.

- [15] Johannes Küster. *Designing Math Fonts*.
<http://www.typoma.com/publ/20040430-bachotex.pdf>, apr 2004.
Vortrag auf der polnischen TeX-Konferenz »BachoTeX«.
- [16] Johannes Küster. *Fonts for Mathematics*.
<http://www.typoma.com/publ/20041002-atypi.pdf>, oct 2004.
Vortrag auf der ATypI-Konferenz in Prag.
- [17] Richard Lawrence. Math=Typography? *TUGboat Journal*, 24(2):165–168, 2003.
- [18] NIST. *Typefaces for Symbols in Scientific Manuscripts*.
<http://physics.nist.gov/Document/typefaces.pdf>, 2004.
- [19] Luca Padovani. Mathml formatting with tex rules and tex fonts. *TUGboat Journal*, 24(1):53–61, 2003.
- [20] Sebastian Rahtz and Leonor Barroca. A style option for rotated objects in L^AT_EX. *TUGboat Journal*, 13(2):156–180, July 1992.
- [21] Steve Seiden. *Math cheat sheet*. TUG,
<http://www.tug.org/texshowcase/#math>, 2000.
- [22] Carole Siegfried and Herbert Voß. Mathematik im Inline-modus. *Die T_EXnische Komödie*, 3/04:25–32, November 2004.
- [23] Paul Taylor. *Commutative Diagrams in T_EX*. Department of Computer Science, Queen Mary and Westfield College,
<http://www.dcs.qmw.ac.uk/~pt/diagrams/>, 2000.
- [24] Herbert Voß. Farbige Mathematik. *Die T_EXnische Komödie*, 2/04:81–87, March 2004.
- [25] Herbert Voß. *L^AT_EX in Naturwissenschaften & Mathematik*. Franzis Verlag, München, first edition, 2006.

Index

Symbols

- \$, 10, 12, 13
 - !, 108
 - \(), 10
 - \), 10
 - \,, 34
 - \:, 34
 - \;, 34
 - \[, 14, 36
 - \], 14, 36
 - A**
 - \above, 91
 - \abovedisplayshortskip, 36
 - \abovedisplayshortskip, 83
 - \abovedisplayskip, 36
 - \abovedisplayskip, 36, 83, 138
 - \abovewithdelims, 92
 - \acute, 40
 - \acute, 40
 - alignat, 57
 - aligned, 57
 - Alignment
 - left, 54
 - \allowdisplaybreaks, 46
 - \ArcCos, 102
 - \ArcCot, 102
 - \ArcCsc, 102
 - \ArcSec, 102
 - \ArcSin, 102
 - \ArcTan, 102
 - array, 56
 - array, 23, 37, 98–100
 - \arraycolsep, 20, 22
 - \arraystretch, 37
 - Arrows, 78
 - \atop, 73
 - \atop, 25, 46, 92
 - \atopwithdelims, 92
 - B**
 - \bar, 40
 - \belowdisplayshortskip, 36
 - \belowdisplayshortskip, 83
 - \belowdisplayskip, 36
 - \belowdisplayskip, 36, 83
 - \bf, 32
 - \Big, 27
 - \big, 27
 - \Bigg, 29
 - \Bigg, 27
 - \bigg, 27
 - \Biggm, 27
 - \biggm, 27
 - \Bigl, 27
 - \bigl, 27
 - \Bigm, 27
 - \bigm, 27
 - \bigr, 27
 - Binom, 46
 - \Binomial, 103
 - \binoppenalty, 95
 - \Bmatrix, 65
 - \bmatrix, 65
 - Bold greek letters, 80
 - \boldmath, 47
 - \boldmath, 48
 - \boldsymbol, 80
 - \bordermatrix, 23
 - \bordermatrix, 23
 - \boxed, 79
 - boxed inline math, 12
 - Braces, 101
 - Problems, 74
 - \Braket, 101
 - \breve, 40
 - \breve, 40
- C**
 - \cal, 32
- \cancel, 102
- Cases

– numbered lines, 120
`\cases`, 21, 64
`\catcode`, 87
`\cdot`, 118
`\cdots`, 39
`\cdots`, 118
 centertags, 50
`\cfrac`, 67
`\chapter`, 11, 12
`\check`, 40
`\check`, 40
`\choose`, 46
`\clap`, 74
`\cmex10`, 30
`\cmr`, 111
 colon, 118
 Color, 47
 color, 125
`\colorbox`, 12
`\columncolor`, 125
 comma, 35, 118
 Computer modern, 111
`\cong`, 116
`\Cos`, 102
`\Cot`, 102
`\Csc`, 102
 ctagsplit, 72

D
`\DblFactorial`, 103
`\dddot`, 66
`\dddot`, 40, 66
`\ddot`, 40
`\ddot`, 40
`\ddots`, 39
 decimal point, 35
`\DeclareMathDelimiter`, 87
`\delcode`, 87
 Delimiter, 14, 30
`\delimiter`, 87
`\delimiterfactor`, 30, 83
`\delimitershortfall`, 30, 84
`\description`, 48

`\dfrac`, 68
`\dfrac`, 11
 differential equation, 118
 Display math mode, 10
`\displaybreak`, 46
 displayindent, 85
`\displayindent`, 84
`\displaylimits`, 92
`\displaymath`, 20
`\displaystyle`, 68
`\displaystyle`, 11, 38, 87, 89
`\displaywidowpenalty`, 95
`\displaywidth`, 85
 dot, 35, 118
`\dot`, 40
`\dot`, 40
`\doteq`, 116
`\dotsb`, 39
`\dotsc`, 39
`\dotsi`, 39
`\dotsm`, 39
`\dotso`, 39
 double stroke, 32
`\dsfont`, 32

E
 ellipses, 118
`\empheq`, 105
`\ensuremath`, 46

Environment
 – `array`, 23, 37, 98–100
 – `description`, 48
 – `displaymath`, 20
 – `\empheq`, 105
 – `\eqnarray`, 15, 16, 20, 36, 51, 105
 – `equation`, 20, 36
 – `gathered`, 108
 – `graphicx`, 109
 – `lgathered`, 108
 – `matrix`, 25
 – `tabular`, 21
`\eqdef`, 46
`\eqnarray`, 15, 16, 20, 36, 51, 105
`\eqno`, 93

E
 Equation
 – number, 72
 – numbering, 70
`equation`, 20, 36
 Equation number, 72
 equation number, 132
`\equiv`, 116
`\everydisplay`, 49
`\everydisplay`, 93
`\everymath`, 49
`\everymath`, 93
 Exponent, 43
 Extensible arrows, 78

F
`\Factorial`, 103
`\fam`, 88
`\fbox`, 12, 19, 105
`\fboxrule`, 12
`\fboxsep`, 12
`fleqn`, 50
`fleqn`, 36
Font
 – `cmex10`, 30
 – `lm`, 111
`fontmath.ltx`, 30
 Fontsize, 39
`\frac`, 46, 109
 Fraction, 11, 67, 109
`\frac`, 67
 Framed inline math, 12

G
`\GammaFunc`, 103
`gather`, 57
`gathered`, 57
`gathered`, 108
`\genfrac`, 67
`\GenGamma`, 103
`\GenRegGamma`, 103
`\GenRegGammaInv`, 103
`graphicx`, 109
`\grave`, 40
`\grave`, 40

H
 Greek, 44
`greek`, 45
 – bold, 45
 – upright, 45

I
`\imath`, 40
`\IncGamma`, 103
 Indentation, 54, 84
 Indice, 43
`\int`, 11, 43, 107
 Integral, 118
 Integral symbols, 114
`\intertext`, 77
`\intlimits`, 50
`\intop`, 43
`\it`, 32
 Italic, 31, 75
`\item`, 48
`\itemize`, 138

J
`\jmath`, 40
`\jot`, 37

K
`\kern`, 34

L
 Label, 18

\label, 72
\labelwidth, 84
\Large, 39
large, 39
Latin modern, 111
\ldelim, 100
\ldots, 39
\ldots, 118
\left, 27, 93, 100
Left aligned, 55
Length
– **\abovedisplayskip**, 36, 138
– **\arraycolsep**, 20, 22
– **\belowdisplayskip**, 36
– **\delimitershortfall**, 30
– **\fboxrule**, 12
– **\fboxsep**, 12
– **\jot**, 37
– **\mathsurround**, 13
– **\topsep**, 36
leqno, 50
\leqno, 93
lgathered, 108
\lim, 11
Limits, 25, 44, 73, 75
limits, 11
\limits, 11, 43, 94
lm, 111
\LogGamma, 103
longtable, 137

M
Macro
– **\ArcCos**, 102
– **\ArcCot**, 102
– **\ArcCsc**, 102
– **\ArcSec**, 102
– **\ArcSin**, 102
– **\ArcTan**, 102
– **\Biggm**, 27
– **\Bigl**, 27
– **\Bigm**, 27
– **\Binomial**, 103
– **\Braket**, 101

– **\Cos**, 102
– **\Cot**, 102
– **\Csc**, 102
– **\DblFactorial**, 103
– **\DeclareMathDelimiter**, 87
– **\Factorial**, 103
– **\GammaFunc**, 103
– **\GenIncGamma**, 103
– **\GenRegIncGammaInv**, 103
– **\GenRegIncGamma**, 103
– **\Huge**, 39
– **\HurwitzZeta**, 103
– **\Hypergeometric**, 103
– **\IncGamma**, 103
– **\Large**, 39
– **\LogGamma**, 103
– **\MathieuCharacteristicA**, 103
– **\MathieuCharacteristicB**, 103
– **\MathieuCharacteristicExponent**, 103
– **\MathieuCharacteristicA**, 103
– **\MathieuCharacteristicB**, 103
– **\MathieuCharacteristicExp**, 103
– **\MathieuC**, 103
– **\MathieuS**, 103
– **\MeijerG**, 103
– **\Multinomial**, 103
– **\Pochhammer**, 103
– **\RegHypergeometric**, 103
– **\RegIncGammaInv**, 103
– **\RegIncGamma**, 103
– **\RiemannSiegelTheta**, 103
– **\RiemannSiegelZ**, 103
– **\RiemannZeta**, 103
– **\Sec**, 102
– **\Set**, 101
– **\Sin**, 102
– **\StieltjesGamma**, 103
– **\Tan**, 102
– **\Zeta**, 103
– **\[**, 14, 36
– **\]**, 14, 36
– **\acute**, 40
– **\allowdisplaybreaks**, 46

- `\arraystretch`, 37
- `\atop`, 25, 46
- `\bar`, 40
- `\biggm`, 27
- `\bigl`, 27
- `\bigr`, 27
- `\boldmath`, 48
- `\bordermatrix`, 23
- `\breve`, 40
- `\cancel`, 102
- `\catcode`, 87
- `\cdots`, 118
- `\cdot`, 118
- `\chapter`, 11, 12
- `\check`, 40
- `\choose`, 46
- `\colorbox`, 12
- `\cong`, 116
- `\ddot`, 40
- `\ddot`, 40
- `\delimiterfactor`, 30
- `\dfrac`, 11
- `\displaybreak`, 46
- `\displaystyle`, 11, 38, 89
- `\doteq`, 116
- `\dot`, 40
- `\ensuremath`, 46
- `\eqdef`, 46
- `\equiv`, 116
- `\everydisplay`, 93
- `\fbox`, 12, 19, 105
- `\frac`, 46, 109
- `\grave`, 40
- `\hat`, 40
- `\hcancel`, 101
- `\phantom`, 34
- `\huge`, 107
- `\imath`, 40
- `\intop`, 43
- `\int`, 11, 43, 107
- `\item`, 48
- `\jmath`, 40
- `\labelwidth`, 84
- `\ldelim`, 100
- `\ldots`, 118
- `\left`, 27, 100
- `\limits`, 11, 43, 94
- `\lim`, 11
- `\makebox`, 26, 132
- `\mathbf`, 48, 100
- `\mathchar`, 89
- `\mathcode`, 87
- `\mathlarger`, 109
- `\mathord`, 35
- `\mathpunct`, 35
- `\mathring`, 40
- `\mathrlap`, 116
- `\mathversion`, 48
- `\mbox`, 31
- `\medmuskip`, 33, 34
- `\nicefrac`, 109
- `\nolimits`, 43
- `\nonumber`, 14–16
- `\ointop`, 43
- `\oint`, 43
- `\overbrace`, 40, 42
- `\overbracket`, 40
- `\overleftarrow`, 40
- `\overleftrightarrow`, 40
- `\overline`, 40
- `\overrightarrow`, 40
- `\overset`, 25
- `\parbox`, 31
- `\part`, 11
- `\pmb`, 44
- `\prod`, 11, 25
- `\rdelim`, 100
- `\right`, 27, 100
- `\scalebox`, 109
- `\scriptscriptstyle`, 38, 89
- `\scriptstyle`, 38, 89
- `\section`, 11, 12, 48
- `\show`, 34
- `\smash`, 26
- `\sqrt`, 26
- `\stackrel`, 46
- `\sum`, 11, 25, 107

- \texorpdfstring, 12
- \textstyle, 31, 38, 89
- \thickmuskip, 33
- \thinmuskip, 33, 34
- \tilde, 40
- \underbar, 40
- \underbrace, 40, 41
- \underbracket, 40
- \underleftarrow, 40
- \underleftrightarrow, 40
- \underline, 40
- \underrightarrow, 40
- \underset, 25
- \vec, 40
- \vert, 30
- \vphantom, 26, 100
- \vskip, 37
- \widehat, 40
- \widetilde, 40
- \xymatrix, 109
- \makebox, 26, 132
- \mapsto fill, 78
- Math operator, 11
- Math unit, 70
- math unit, 33
- \mathaccent, 88
- \mathbb, 32
- \mathbf, 32
- \mathbf, 48, 100
- \mathbin, 88
- \mathcal, 32
- \mathchar, 88, 89
- \mathchardef, 89
- \mathchoice, 89
- \mathclap, 74, 129
- \mathclose, 89
- \mathcode, 87, 89
- \mathds, 32
- \mathfrak, 32
- Mathieu
 - Characteristics, 103
 - Functions, 103
 - \MathieuC, 103
 - \MathieuCharacteristicA, 103
 - \MathieuCharacteristicB, 103
 - \MathieuCharacteristicExponent, 103
 - \MathieuCharisticA, 103
 - \MathieuCharisticB, 103
 - \MathieuCharisticExp, 103
 - \MathieuS, 103
 - \mathindent, 50
 - \mathinner, 94
 - \mathit, 32
 - \mathlarger, 109
 - \mathop, 90
 - \mathopen, 90
 - mathopen symbol, 27
 - \mathord, 35, 90
 - \mathop, 35, 90
 - \mathrel, 90
 - \mathring, 40
 - \mathring, 40
 - \mathrlap, 116
 - \mathrm, 32, 76
 - \mathsf, 32
 - \mathsurround, 13, 85
 - \mathtt, 32
 - \mathversion, 47
 - \mathversion, 48
 - \matrix, 65
 - \matrix, 25
 - \mbox, 76
 - \mbox, 31
 - \medmuskip, 33, 34, 85
 - \medspace, 34
 - \MeijerG, 103
 - \mkern, 85
 - \mskip, 85
 - \Multinomial, 103
 - Multiple exponents, 42
 - multiline, 62
 - \multinegap, 60
 - \muskip, 86
 - \muskipdef, 86
- N
 - namelimits, 50
 - \negmedspace, 34

`\negthickspace`, 34
`\negthinspace`, 34
`\nicefrac`, 109
`nointlimits`, 50
`\nolimits`, 43, 94
`nonamelimits`, 50
`\nonscript`, 86
`\nonumber`, 14–16
`nosumlimits`, 50
`\nulldelimiterspace`, 86

O

`\oint`, 43
`\ointop`, 43
`Operator`, 43
 – names, 75
 – size, 109
`\operatorname{withlimits}`, 75
`\over`, 94
`\overbrace`, 40, 127
`\overbrace`, 40, 42
`\overbracket`, 40
`\overleftarrow`, 40
`\overleftarrow`, 40
`\overleftrightarrow`, 40
`\overleftrightarrow`, 40
`\overline`, 40
`\overline`, 40, 94, 139
`\overrightarrow`, 40, 42
`\overrightarrow`, 40
`\overset`, 80
`\overset`, 25
`\overwithdelims`, 94

P

Package

- `accent`, 98
- `amscd`, 98
- `amsmath`, 91
- `amsopn`, 98
- `amssymb`, 34, 40
- `bigdelim`, 99
- `bm`, 45, 48, 100
- `braket`, 30, 100
- `calc`, 19
- `color`, 101
- `cool`, 102
- `delarray`, 104
- `empheq`, 106
- `esint`, 130
- `esvect`, 42
- `eucal`, 107
- `exscale`, 39, 107, 109
- `fixltx2e`, 11
- `hvmath`, 111
- `hyperref`, 12
- `icomma`, 35
- `leqno`, 17
- `mathpazo`, 112
- `mathtools`, 108
- `multirow`, 98
- `nicefrac`, 109
- `numprint`, 35
- `pamath`, 111, 112
- `pstricks`, 98
- `relsize`, 109
- `remreset`, 17
- `setspace`, 38
- `units`, 109
- `upgreek`, 45
- `wasysym`, 106
- `xypic`, 98, 109
- `xy`, 109
- Pagebreak, 46
- Palatino, 111, 112
- `\parbox`, 65
- `\parbox`, 31
- `\part`, 11
- `\phantom`, 120
- `\pmatrix`, 65
- `\pmb`, 80
- `\pmb`, 44
- `\Pochhammer`, 103
- Polylogarithm, 103
- `\postdisplaypenalty`, 96
- `\predisplaypenalty`, 96
- `\predisplaystyle`, 86
- `\prod`, 11, 25

punctuation, 118

Q

- \qquad, 34
- \quad, 34

R

- \radical, 94
- \rdelim, 100
- Reference, 18
- \reflectbox, 39
- \RegHypergeometric, 103
- \RegIncGamma, 103
- \RegIncGammaInv, 103
- \relpenalty, 96
- reqno, 50
- \RiemannSiegelTheta, 103
- \RiemannSiegelZ, 103
- \RiemannZeta, 103
- \right, 27, 95, 100
- righttag, 72
- \rm, 32
- Root, 26, 69, 139
- \rowcolor, 125

S

- \scalebox, 109
- \scriptfont, 90
- \scriptscriptfont, 90
- \scriptscriptstyle, 38, 89, 91
- \scriptspace, 86
- scriptstyle, 11
- \scriptstyle, 11, 68
- \scriptstyle, 38, 89, 91
- \Sec, 102
- \section, 11, 12, 48
- \Set, 101
- Set symbol, 32
- \shoveright, 60
- \show, 34
- \sideset, 75
- \Sin, 102
- Size
 - Operator, 109
- \skew, 91
- \skewchar, 91
- \smallmatrix, 65, 66
- \smash, 26
- Spacing
 - vertical, 37
- Split equation, 56
- \sqrt, 26
- Stacked limits, 74
- \stackrel, 46
- \StieltjesGamma, 103
- Style, 39
- Subequations, 71
- Subscript, 11
- subscript, 25
- \substack, 73, 74, 129
- \sum, 75
- \sum, 11, 25, 107
- sumlimits, 50
- Superscript, 11

T

- \tabular, 21
- \tag, 19
- \Tan, 102
- tbtags, 50
- \texorpdfstring, 12
- Text, 31
 - \parbox, 31
- \textfont, 91
- \textstyle, 31, 38, 89, 91
- \tfrac, 68
- \thickmuskip, 33, 86
- \thickspace, 34
- \thinmuskip, 33, 34, 86
- \thinspace, 34
- \tilde, 40
- \tilde, 40
- \topsep, 36
- \tt, 32

U

- \unboldmath, 47
- \underbar, 40
- \underline, 40

\underbrace, 40, 127, 129
\underbrace, 40, 41
\underbracket, 40
\underleftarrow, 40
\underleftarrow, 40
\underleftrightarrow, 40
\underleftrightarrow, 40
\underline, 40, 49
\underline, 40, 95
\underrightarrow, 40
\underrightarrow, 40
\underset, 80, 130
\underset, 25
Upright letters, 43
upright mode, 25
\uproot, 69

V

\vcenter, 95
\vdots, 39, 134
\vec, 40
\vec, 40
Vector, 42, 123
\vert, 30
Vertical spacing, 37
\Vmatrix, 65
\vmatrix, 65
\vphantom, 129
\vphantom, 26, 100
\vskip, 37

W

\widehat, 40
\widehat, 40
\widetilde, 40
\widetilde, 40

X

\xleftharpoondown, 115
\xleftharpoonup, 115
\xleftightharpoons, 115
\xrightharpoondown, 115
\xrightharpoonup, 115
\xrightleftharpoons, 115
\xymatrix, 109

Z

Zeta, 103
– Functions, 103
– Hurwitz, 103
– Riemann, 103
\Zeta, 103

Appendix

A Filelist

This document was build with

```
1 This is pdfTeXk, Version 3.141592-1.40.3 (Web2C 7.5.6) (format=
  pdflatex 2007.3.18) 21 APR 2007 09:54
```

and with the following file and package versions:

1	*File List*
2	article.cls 2005/09/16 v1.4f Standard LaTeX document class
3	size11.clo 2005/09/16 v1.4f Standard LaTeX file (size option)
4	fixltx2e.sty 2006/03/24 v1.1n fixes to LaTeX
5	fontenc.sty 2005/09/27 v1.99g Standard LaTeX file
6	inputenc.sty 2006/05/05 v1.1b Input encoding file
7	latin1.def 2006/05/05 v1.1b Input encoding file
8	ifpdf.sty 2006/02/20 v1.4 Provides the ifpdf switch (HO)
9	ifvtex.sty 2007/01/10 v1.2 Switches for detecting VTeX and its
10	modes (HO)
11	comment.sty
12	graphicx.sty 1999/02/16 v1.0f Enhanced LaTeX Graphics (DPC,SPQR)
13	keyval.sty 1999/03/16 v1.13 key=value parser (DPC)
14	graphics.sty 2006/02/20 v1.0o Standard LaTeX Graphics (DPC,SPQR)
15	trig.sty 1999/03/16 v1.09 sin cos tan (DPC)
16	graphics.cfg 2007/01/18 v1.5 graphics configuration of teTeX/ TeXLive
17	pdftex.def 2007/01/08 v0.04d Graphics/color for pdfTeX
18	varwidth.sty 2003/03/10 ver 0.9a; Variable-width minipages
19	array.sty 2005/08/23 v2.4b Tabular extension package (FMi)
20	delarray.sty 1994/03/14 v1.01 array delimiter package (DPC)
21	tabularx.sty 1999/01/07 v2.07 'tabularx' package (DPC)
22	amsmath.sty 2000/07/18 v2.13 AMS math features
23	amstext.sty 2000/06/29 v2.01
24	amsgen.sty 1999/11/30 v2.0
25	amsbsy.sty 1999/11/29 v1.2d
26	amsopn.sty 1999/12/14 v2.01 operator names
27	amssymb.sty 2002/01/22 v2.2d
28	amsfonts.sty 2001/10/25 v2.2f
29	bm.sty 2004/02/26 v1.1c Bold Symbol Support (DPC/FMi)
30	upgreek.sty 2003/02/12 v2.0 (WaS)
31	cancel.sty 2000/03/12 v2.1 Cancel math terms
32	amscd.sty 1999/11/29 v1.2d
33	accents.sty 2006/05/12 v1.3 Math Accent Tools
34	dsfont.sty 1995/08/01 v0.1 Double stroke roman fonts
35	multirow.sty
36	bigdelim.sty
37	framed.sty 2003/07/21 v 0.8a: framed or shaded text with page breaks
38	longtable.sty 2004/02/01 v4.11 Multi-page Table package (DPC)
39	varioref.sty 2006/05/13 v1.4p package for extended references (FMi)
40	xcolor.sty 2007/01/21 v2.11 LaTeX color extensions (UK)

41	color.cfg	2007/01/18 v1.5 color configuration of teTeX/TeXLive
42	makeidx.sty	2000/03/29 v1.0m Standard LaTeX package
43	url.sty	2005/06/27 ver 3.2 Verb mode for urls, etc.
44	setspace.sty	2000/12/01 6.7 Contributed and Supported LaTeX2e package
45	empheq.sty	2004/10/10 v2.11a Emphasizing equations (MH)
46	mhsetup.sty	2004/10/10 v1.0b programming setup (MH)
47	mathtools.sty	2004/10/10 v1.01a mathematical typesetting tools (MH)
48	calc.sty	2005/08/06 v4.2 Infix arithmetic (KKT,FJ)
49	nicefrac.sty	1998/08/04 v0.9b Nice fractions
50	ifthen.sty	2001/05/26 v1.1c Standard LaTeX ifthen package (DPC)
51	exscale.sty	1997/06/16 v2.1g Standard LaTeX package exscale
52	relsize.sty	2003/07/04 ver 3.1
53	xspace.sty	2006/05/08 v1.12 Space after command names (DPC,MH)
54	euclab.sty	2001/10/01 v2.2d Euler Script fonts
55	footmisc.sty	2005/03/17 v5.3d a miscellany of footnote facilities
56	esint.sty	
57	esvect.sty	
58	remreset.sty	
59	cool.sty	2006/12/29 v1.35 COntent Oriented LaTeX
60	coollist.sty	2006/08/14 v1 COntent Oriented LaTeX Lists
61	coolstr.sty	2007/01/08 v2.1 COntent Oriented LaTeX Strings
62	forloop.sty	2006/09/18 v3.0 For Loops for LaTeX
63	bbm.sty	1999/03/15 V 1.2 provides fonts for set symbols - TH
64	xypic.sty	1999/02/16 Xy-pic version 3.7
65	xy.sty	
66	fancyhdr.sty	
67	showexpl.sty	2007/02/03 v0.3h Typesetting example code (RN)
68	listings.sty	2004/10/17 1.3b (Carsten Heinz)
69	lstpatch.sty	2004/10/17 1.3b (Carsten Heinz)
70	lstmisc.sty	2004/09/07 1.3 (Carsten Heinz)
71	listings.cfg	2004/09/05 1.3 listings configuration
72	lstmisc.sty	2004/09/07 1.3 (Carsten Heinz)
73	showexpl.cfg	2005/06/30 v0.02 Definitions for the showexpl package (hv)
74	lstlang1.sty	2004/09/05 1.3 listings language file
75	lstlang2.sty	2004/09/05 1.3 listings language file
76	lstlang3.sty	2004/09/05 1.3 listings language file
77	lstmisc.sty	2004/09/07 1.3 (Carsten Heinz)
78	microtype.sty	2007/01/21 v2.0 Micro-typography with pdfTeX (RS)
79	microtype.cfg	2007/01/14 v2.0 microtype main configuration file (RS)
80	hyperref.sty	2007/02/07 v6.75r Hypertext links for LaTeX
81	pdienc.def	2007/02/07 v6.75r Hyperref: PDFDocEncoding definition (HO)
82	hyperref.cfg	2002/06/06 v1.2 hyperref configuration of TeXLive
83	kvoptions.sty	2006/08/22 v2.4 Connects package keyval with LaTeX options (HO)
84	hpdftex.def	2007/02/07 v6.75r Hyperref driver for pdfTeX
85	hypcap.sty	2006/02/20 v1.5 Adjusting anchors of captions (HO)
86	babel.sty	2005/11/23 v3.8h The Babel package
87	english.ldf	2005/03/30 v3.3o English support from the babel system
88	braket.sty	
89	supp-pdf.tex	

```

90  mt-cmr.cfg      2005/11/07 v1.9 microtype config. file: Computer
     Modern Roman (RS)
91  nameref.sty     2006/12/27 v2.28 Cross-referencing by name of section
92  refcount.sty    2006/02/20 v3.0 Data extraction from references (HO)
93  Mathmode.out
94  Mathmode.tex
95    umsa.fd       2002/01/19 v2.2g AMS font definitions
96    mt-msa.cfg     2006/02/04 v1.1 microtype config. file: AMS symbols (a
     ) (RS)
97    umsb.fd       2002/01/19 v2.2g AMS font definitions
98    mt-msb.cfg     2005/06/01 v1.0 microtype config. file: AMS symbols (b
     ) (RS)
99    mt-eur.cfg     2006/07/31 v1.1 microtype config. file: AMS Euler
     Roman (RS)
100   uesint.fd
101   uesvect.fd
102   t1cmtt.fd     1999/05/25 v2.5h Standard LaTeX font definitions
103   omscmr.fd     1999/05/25 v2.5h Standard LaTeX font definitions
104   t1cmss.fd     1999/05/25 v2.5h Standard LaTeX font definitions
105 Mathmode.bbl
106 Mathmode.ind
107 ****

```